THE LINC
NEXT ERA

Concept Pricing Package
October 22, 2026

HKS AMBITION

A GENERATIONAL TRANSFORMATION

Preserve The Linc

Transform what limits its future

A renovation that performs like a new-build

Unmistakably Eagles





DESIGN DRIVERS

HOUSE OF ENERGY · HIGHER AMPLITUDE

The renovation treats the crowd as the building's power source. Canopy, rake, and enclosure are tuned like an instrument — holding sound in the bowl and returning it to the field louder.





GENERATIONAL GRIT.

HYPER LOCAL


SOMERTON
BYBERRY
PARKWOOD MANOR
BUSTLETON
NORTHEAST PHILADELPHIA AIRPORT
MODENA
MILLBROOK
FOX CHASE
MORRELL PARK
RHAWNHURST
PENNYPACK
CHESTNUT HILL
CEDARBROOK
ANDORRA
EAST MT. AIRY
WEST OAK LANE
EAST OAK LANE
WEST MT. AIRY
ROXBOROUGH
OGONTZ
FERN ROCK
OXFORD CIRCLE
TORRESDALE
LAWNCREST
MAYFAIR
HOLMESBURG
GERMANTOWN
OLNEY
MANAYUNK
LOGAN
TACONY
FELTONVILLE
NORTHWOOD
WISSINOMING
EAST FALLS
NICETOWN
HUNTING PARK
JUNIATA PARK
FRANKFORD
TIOGA
SWAMPOODLE
FAIRHILL
HARRIWGATE
BRIDESBURG
WYNNEFIELD
STRAWBERRY MANSION
STANTON
OLD KENSINGTON
KENSINGTON
RICHMOND
PORT RICHMOND
OVERBROOK PARK
OVERBROOK
PARKSIDE
NORTH PHILADELPHIA
FISHTOWN
MANTUA
POWELTON
COBBS CREEK
UNIVERSITY CITY
CENTER CITY
KINGSESSING
GRAY'S FERRY
SOUTH PHILADELPHIA
ELMWOOD
GIRARD ESTATES
LOWER MOYAMENSING
WHITMAN
EASTWICK
PACKER PARK
STADIUM DISTRICT
NAVY YARD

PHILADELPHIA EAGLES

GIVE MORE THAN YOU TAKE

FOR THE CITY. FOR THE TEAM. FOR EACH OTHER.

BUILT FOR MORE
Designing spaces that inspire, unite, and uplift generations.

ROOTED IN COMMUNITY
Listening, learning, and building together.

CREATING LASTING IMPACT
Beyond the game.
Beyond today.
For tomorrow.





ARCHITECTURAL CONCEPTS



THE NEST

GENERATIONAL FABRIC OF PHILADELPHIA...

THE NEW HOME FOR EAGLES NATION.

The Nest is conceived as a “kit of parts,” weaving together the generational fabric of Philadelphia into a single architectural language. Solid masonry and steel surfaces root the building in the city’s grit and industrial origins. Vertical glass fins express contemporary Philadelphia — a leader in arts, culture, business, and sport. Embedded digital elements gesture toward the city’s future. Reflective surfaces evoke the Eagles brand itself, dissolving the line between team and city: the Eagles are Philly, and Philly is the Eagles.

THE PAST...



THE CONTEMPORARY...



THE FUTURE...



PHILLY FAITHFUL...



MATERIAL LANGUAGE



MATERIALITY
Solid. Enduring.
Rooted in the City.


STEEL
Industrial. Strong.
Built to Last.

GLASS
Transparent. Vertical.
Forward Looking.

DIGITAL
Dynamic. Intelligent.
Future Ready.

REFLECTIVE
Unity. Pride.
Mirror of the City.

A REFLECTION OF PHILADELPHIA

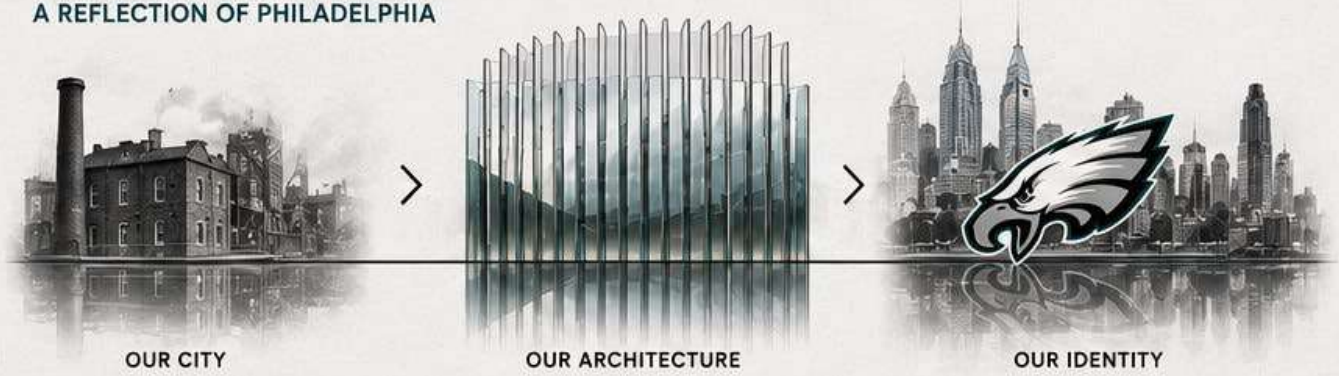

OUR CITY

OUR ARCHITECTURE


OUR IDENTITY


MATERIALITY / INSPIRATION PALETTE







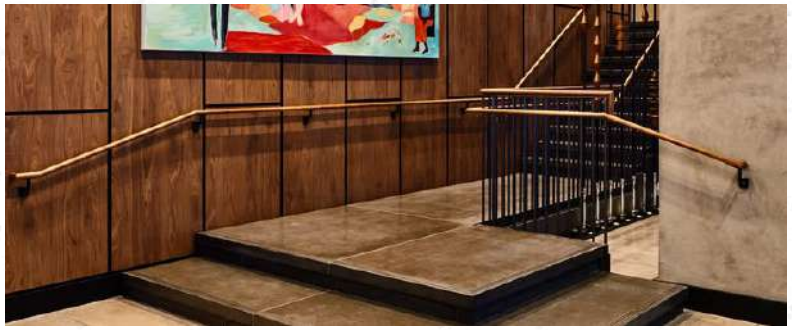

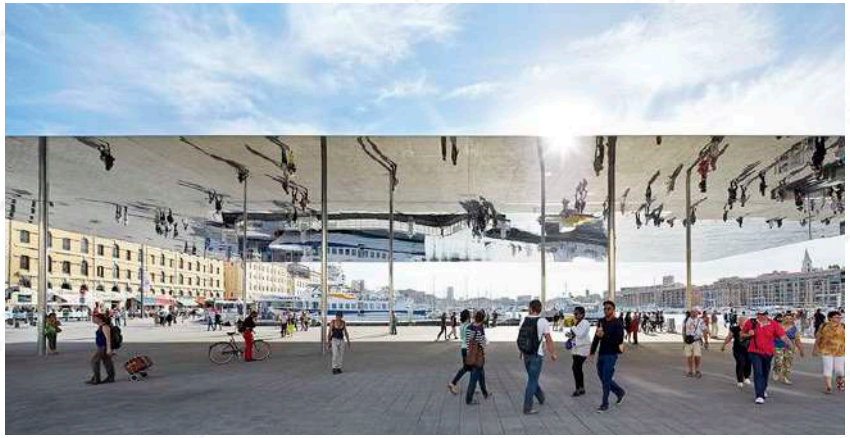


EXTERIOR DESIGN AND MATERIALS

METAL PANEL



102,696 SF

MASONRY



39,499.58 SF

FINS



152,280.84 SF

GLAZING




148,901.06 SF

REFLECTIVE ROOF / SOFFIT



365,438.54 SF

SOFFIT

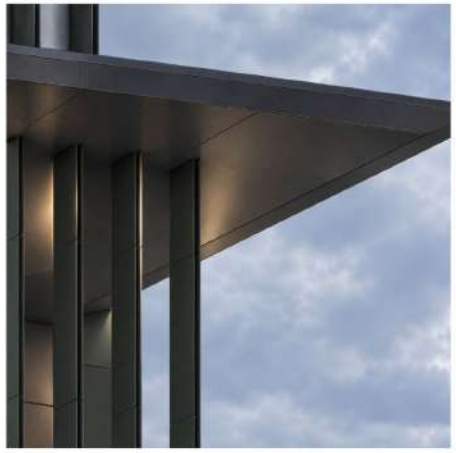

79,220.39 SF

MESH/GRATE




88,243 SF

VIDEO BOARD



224,274 SF


MASONRY

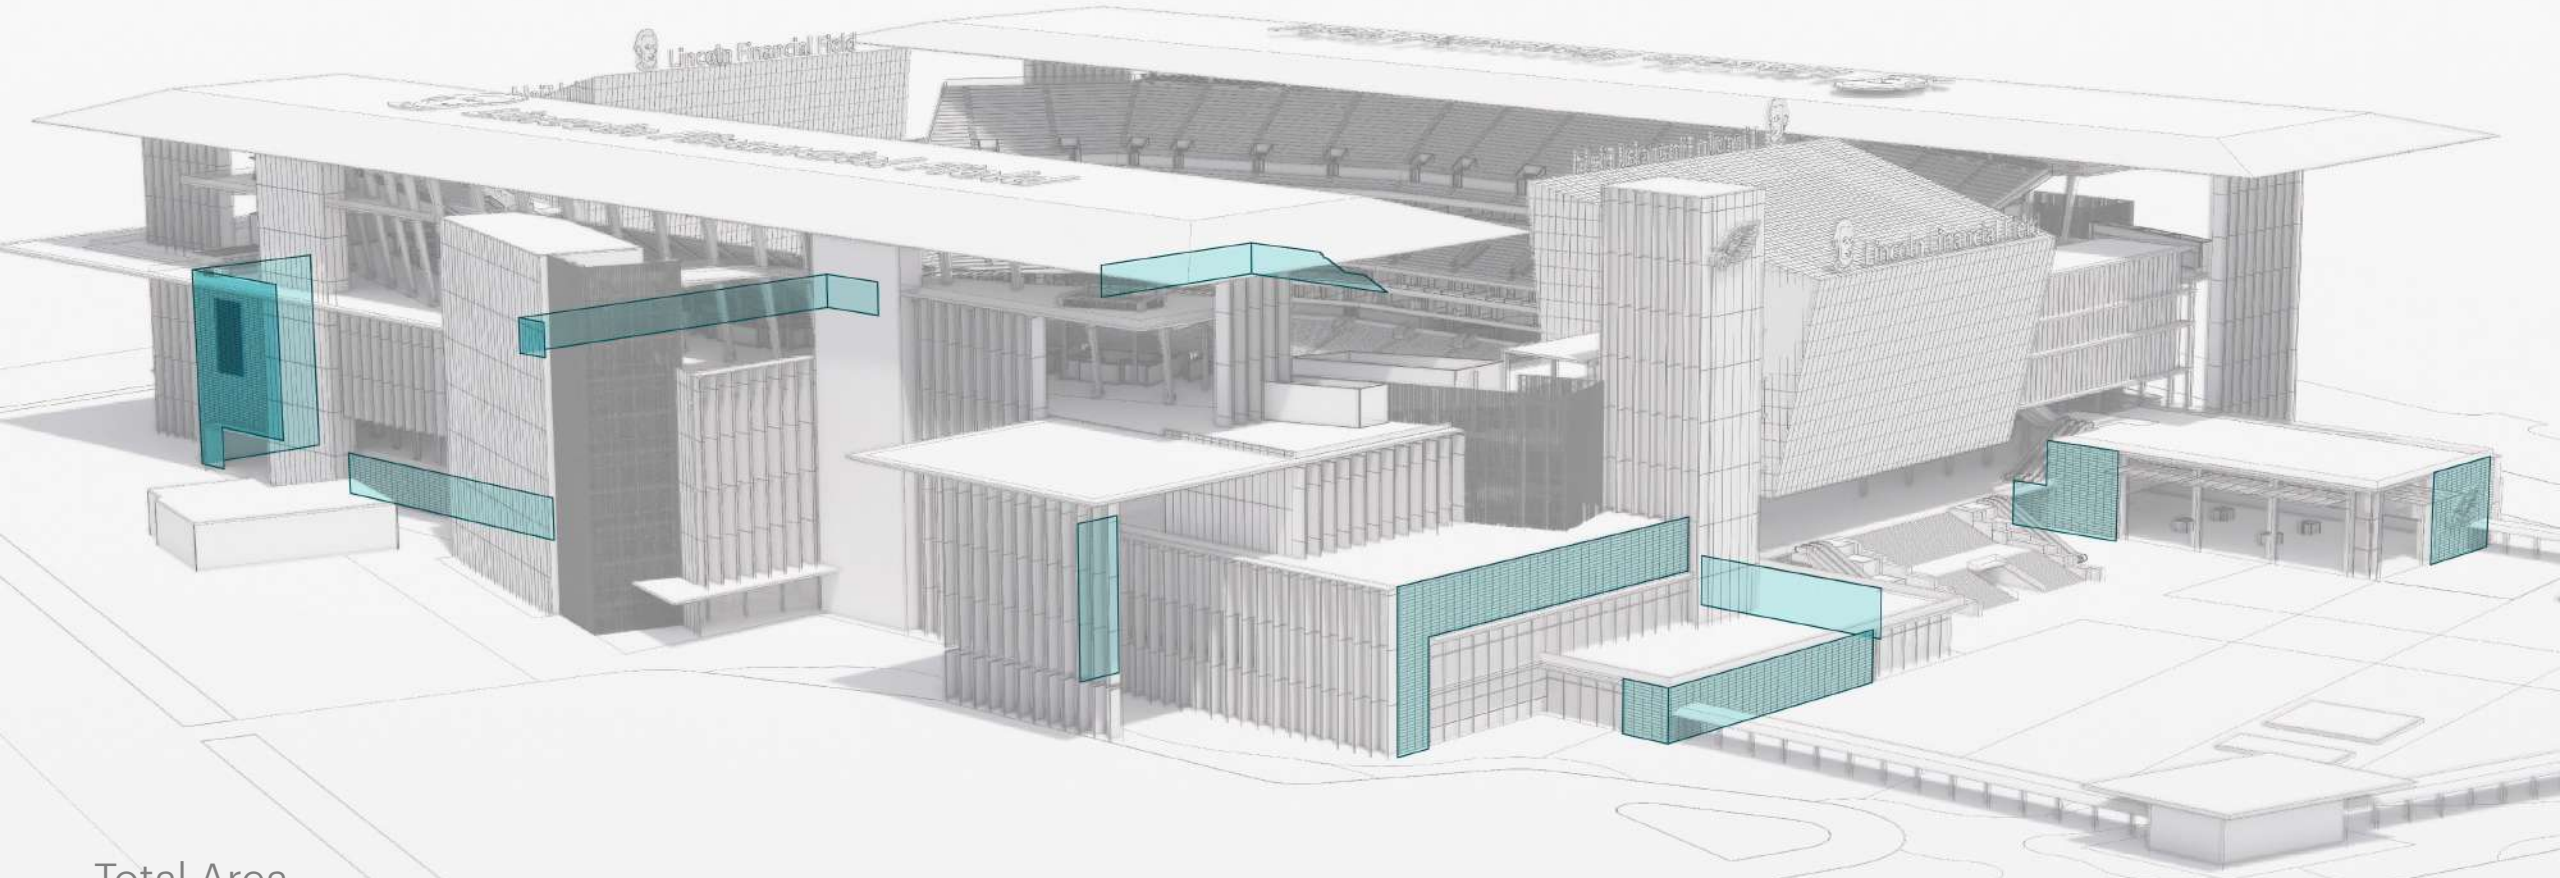

Total Area

39,500 SF


FINS

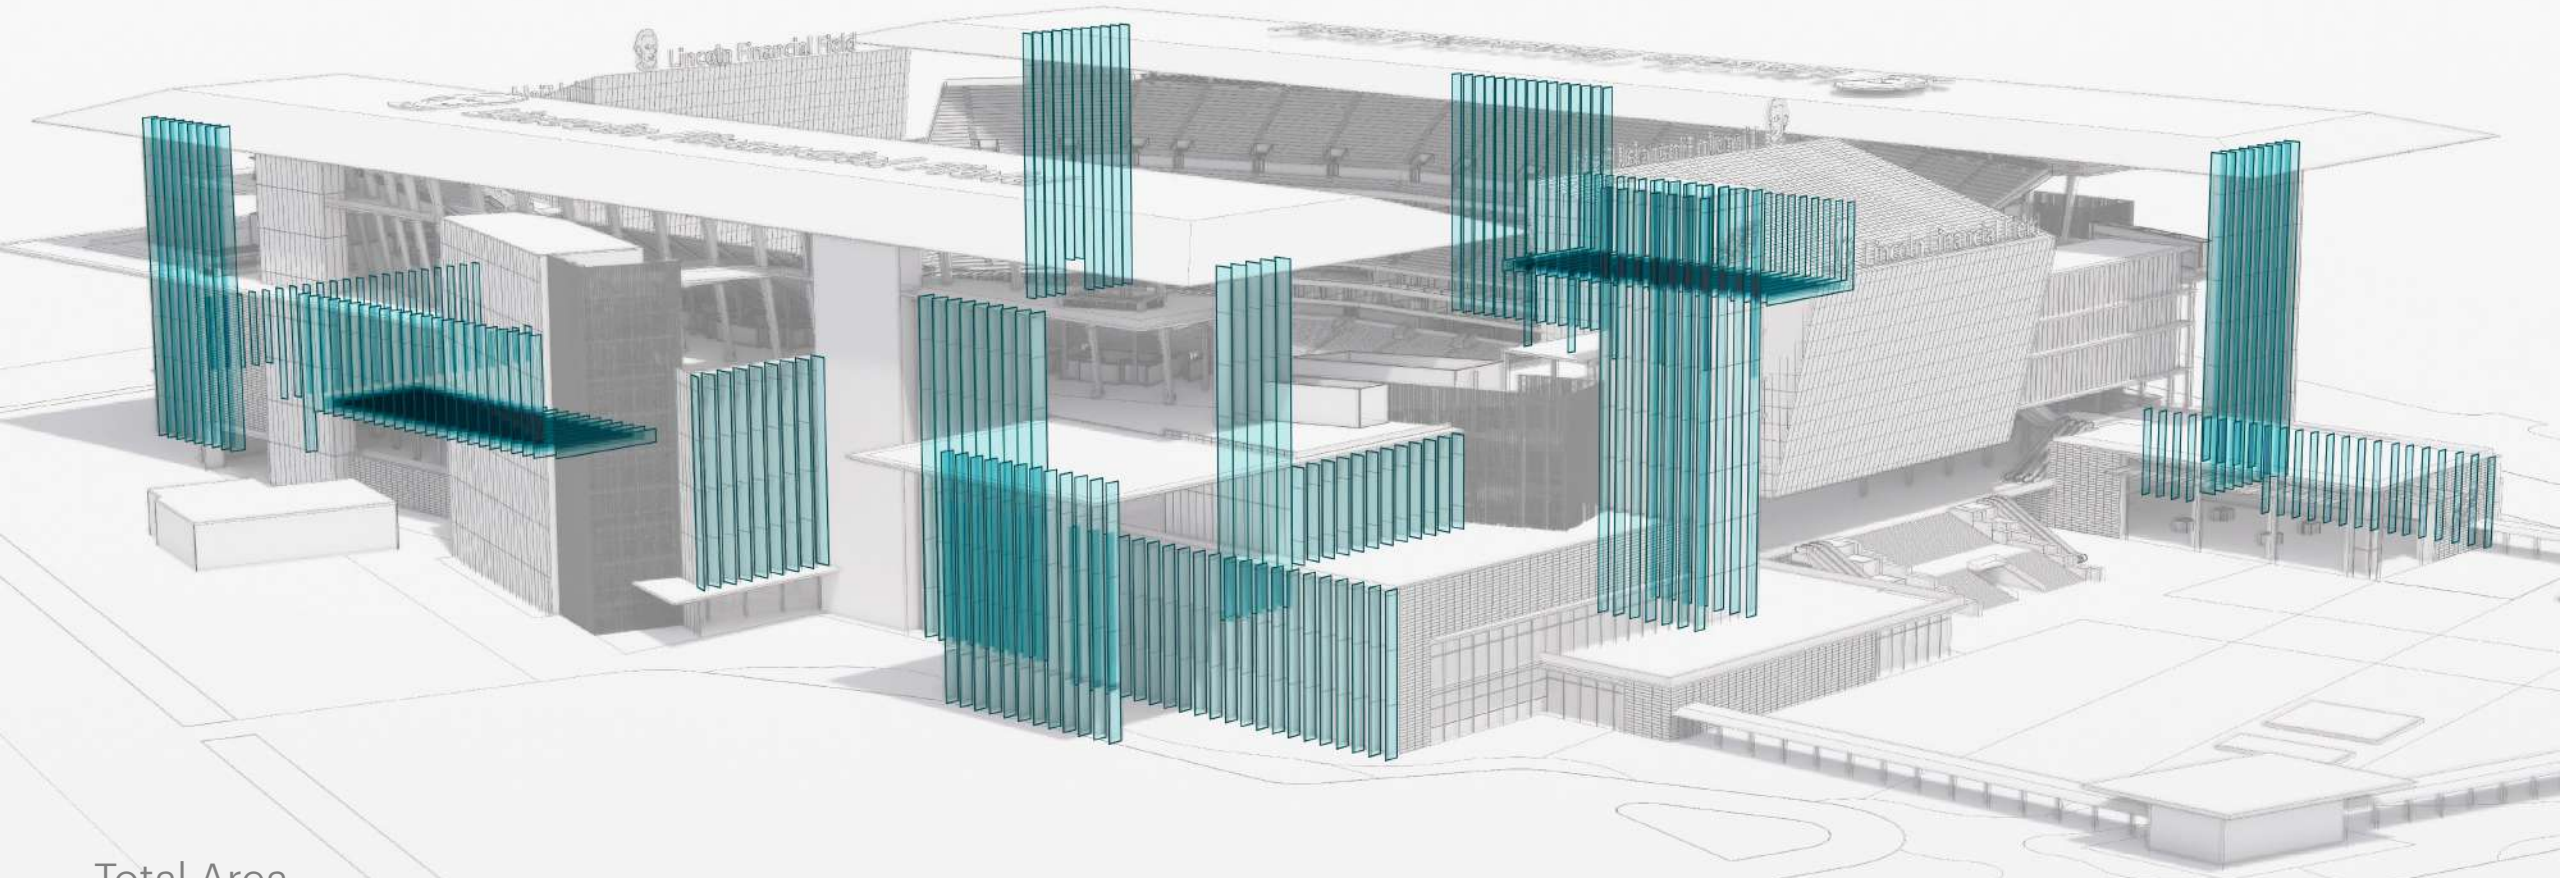

Total Area

152,280 SF


GLAZING

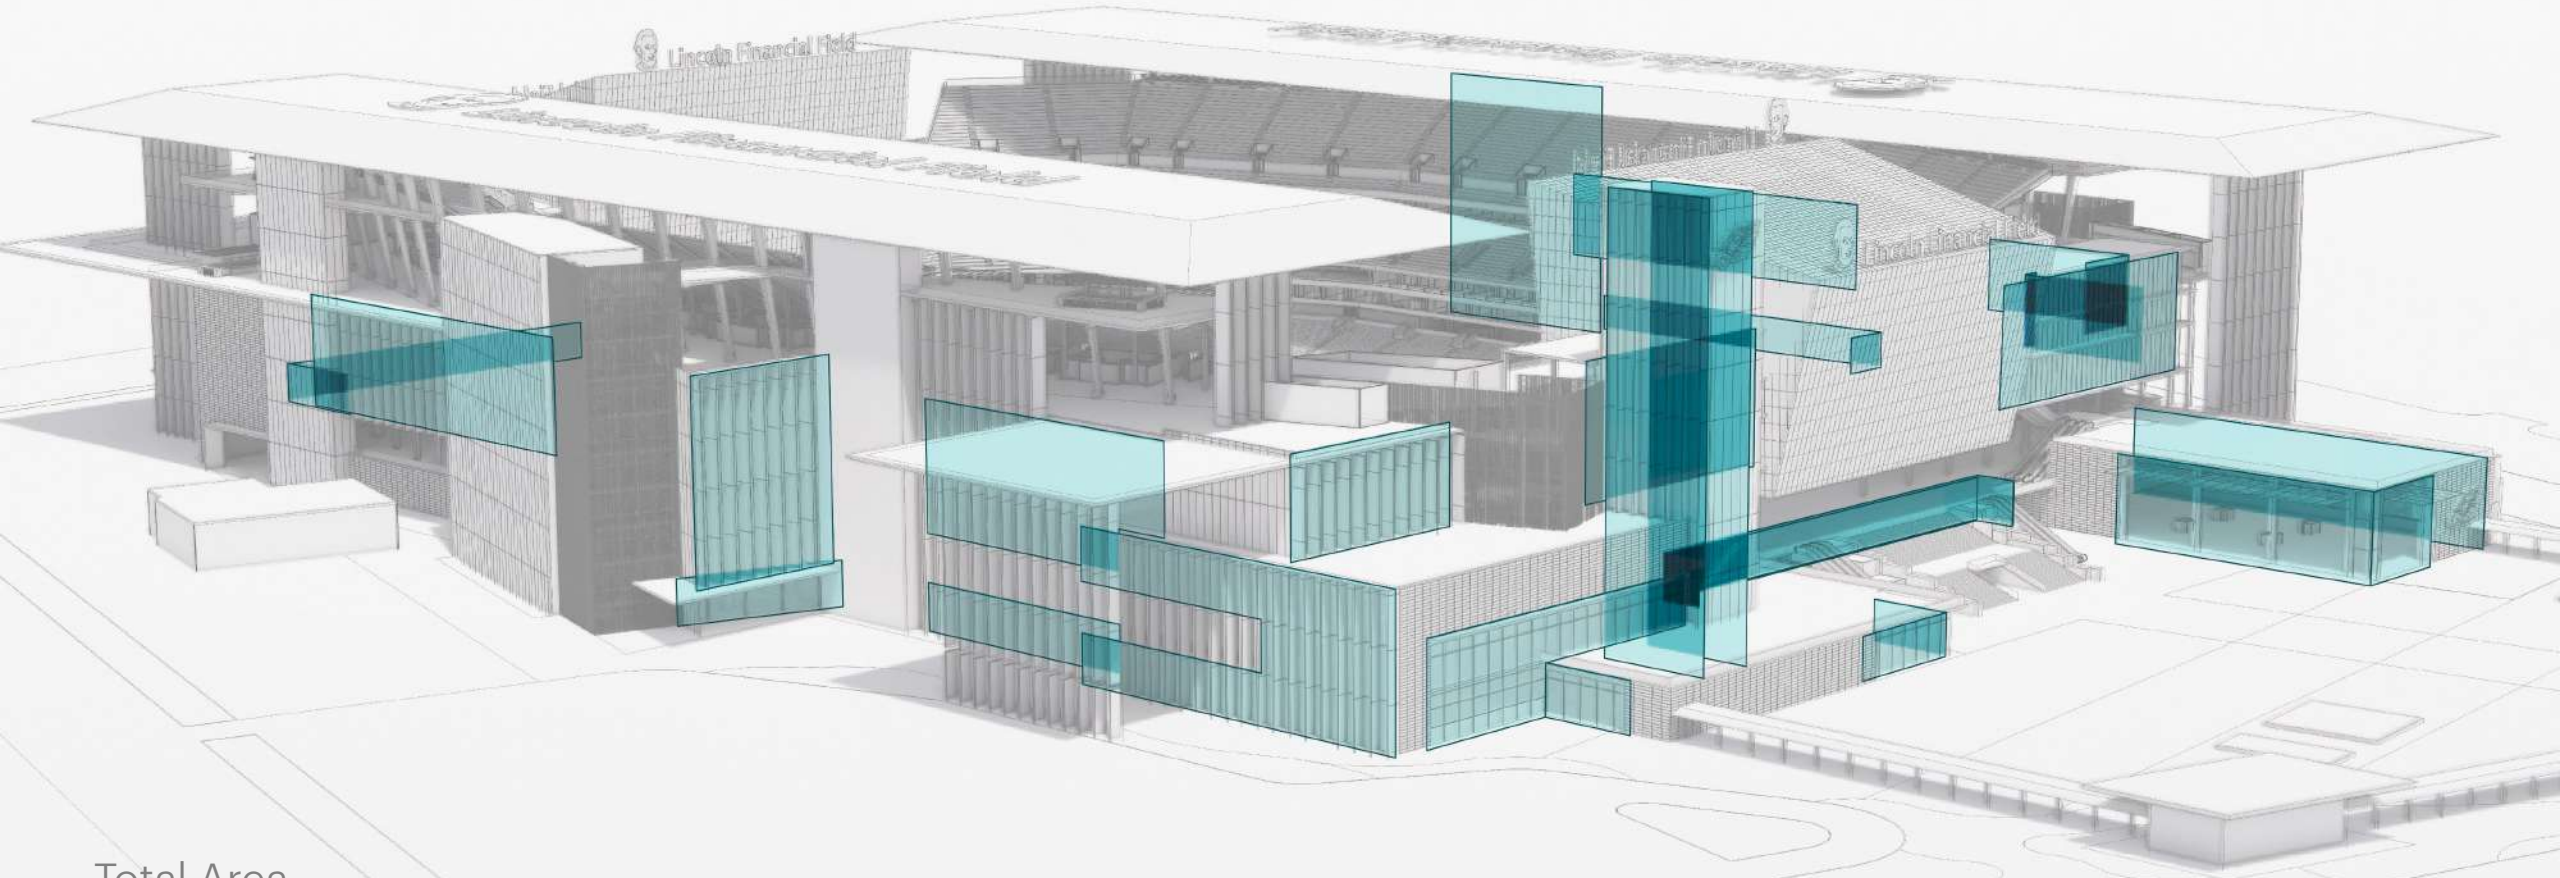

Total Area

148,900 SF


METAL PANEL

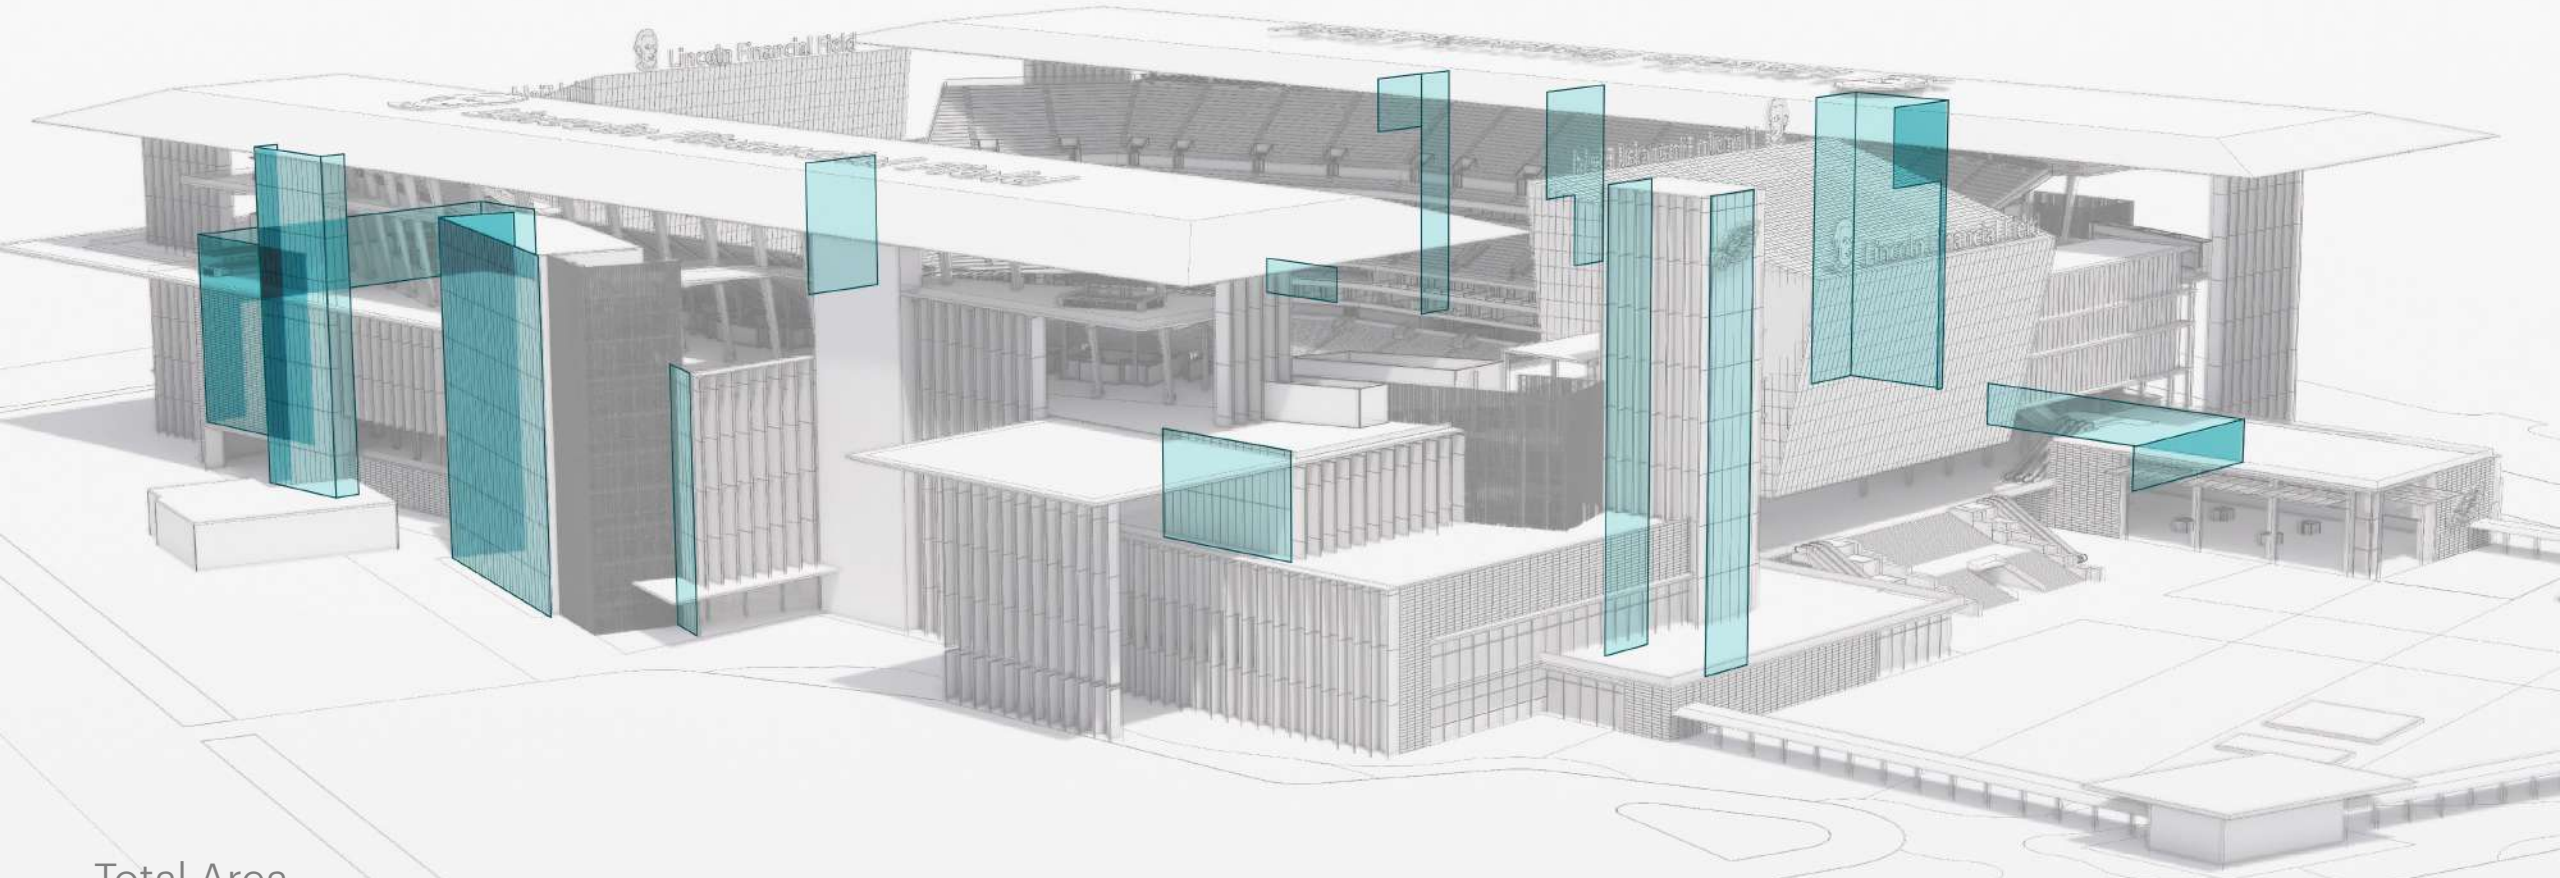

Total Area

102,696 SF

MESH / GRATE

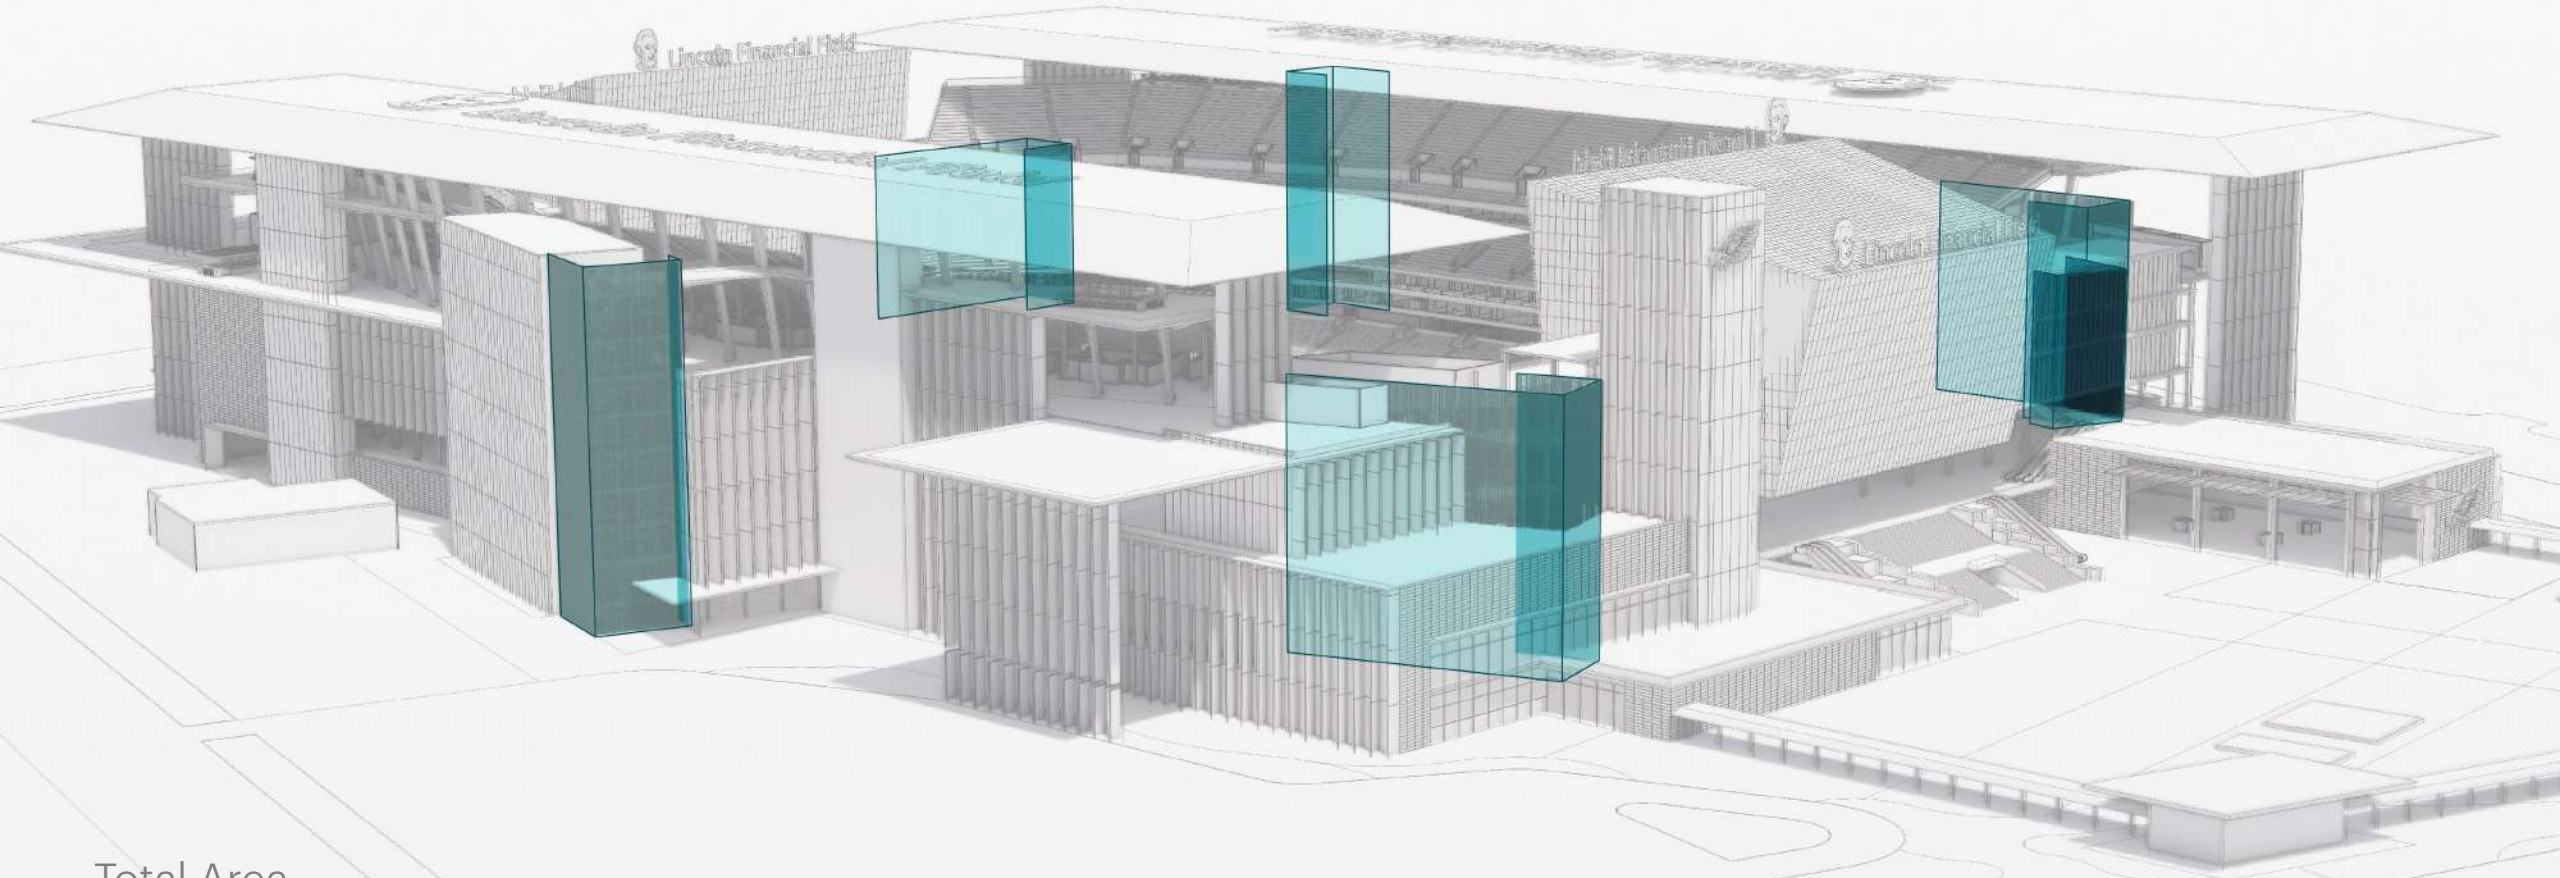

Total Area


88,243 SF

FACADE MATERIALS

FACADE TOTAL
531,620.48 sf

	MATERIAL	AREA (SF)	% OF FACADE
	Masonry	39,499.58	7.4%
	Fins	152,280.84	28.6%
	Glazing	148,901.06	28.0%
	Metal panel	102,696	19.3%
	Mesh / grate	88,243	16.1%
	TOTAL	531,620.48	100%


REFLECTIVE ROOF

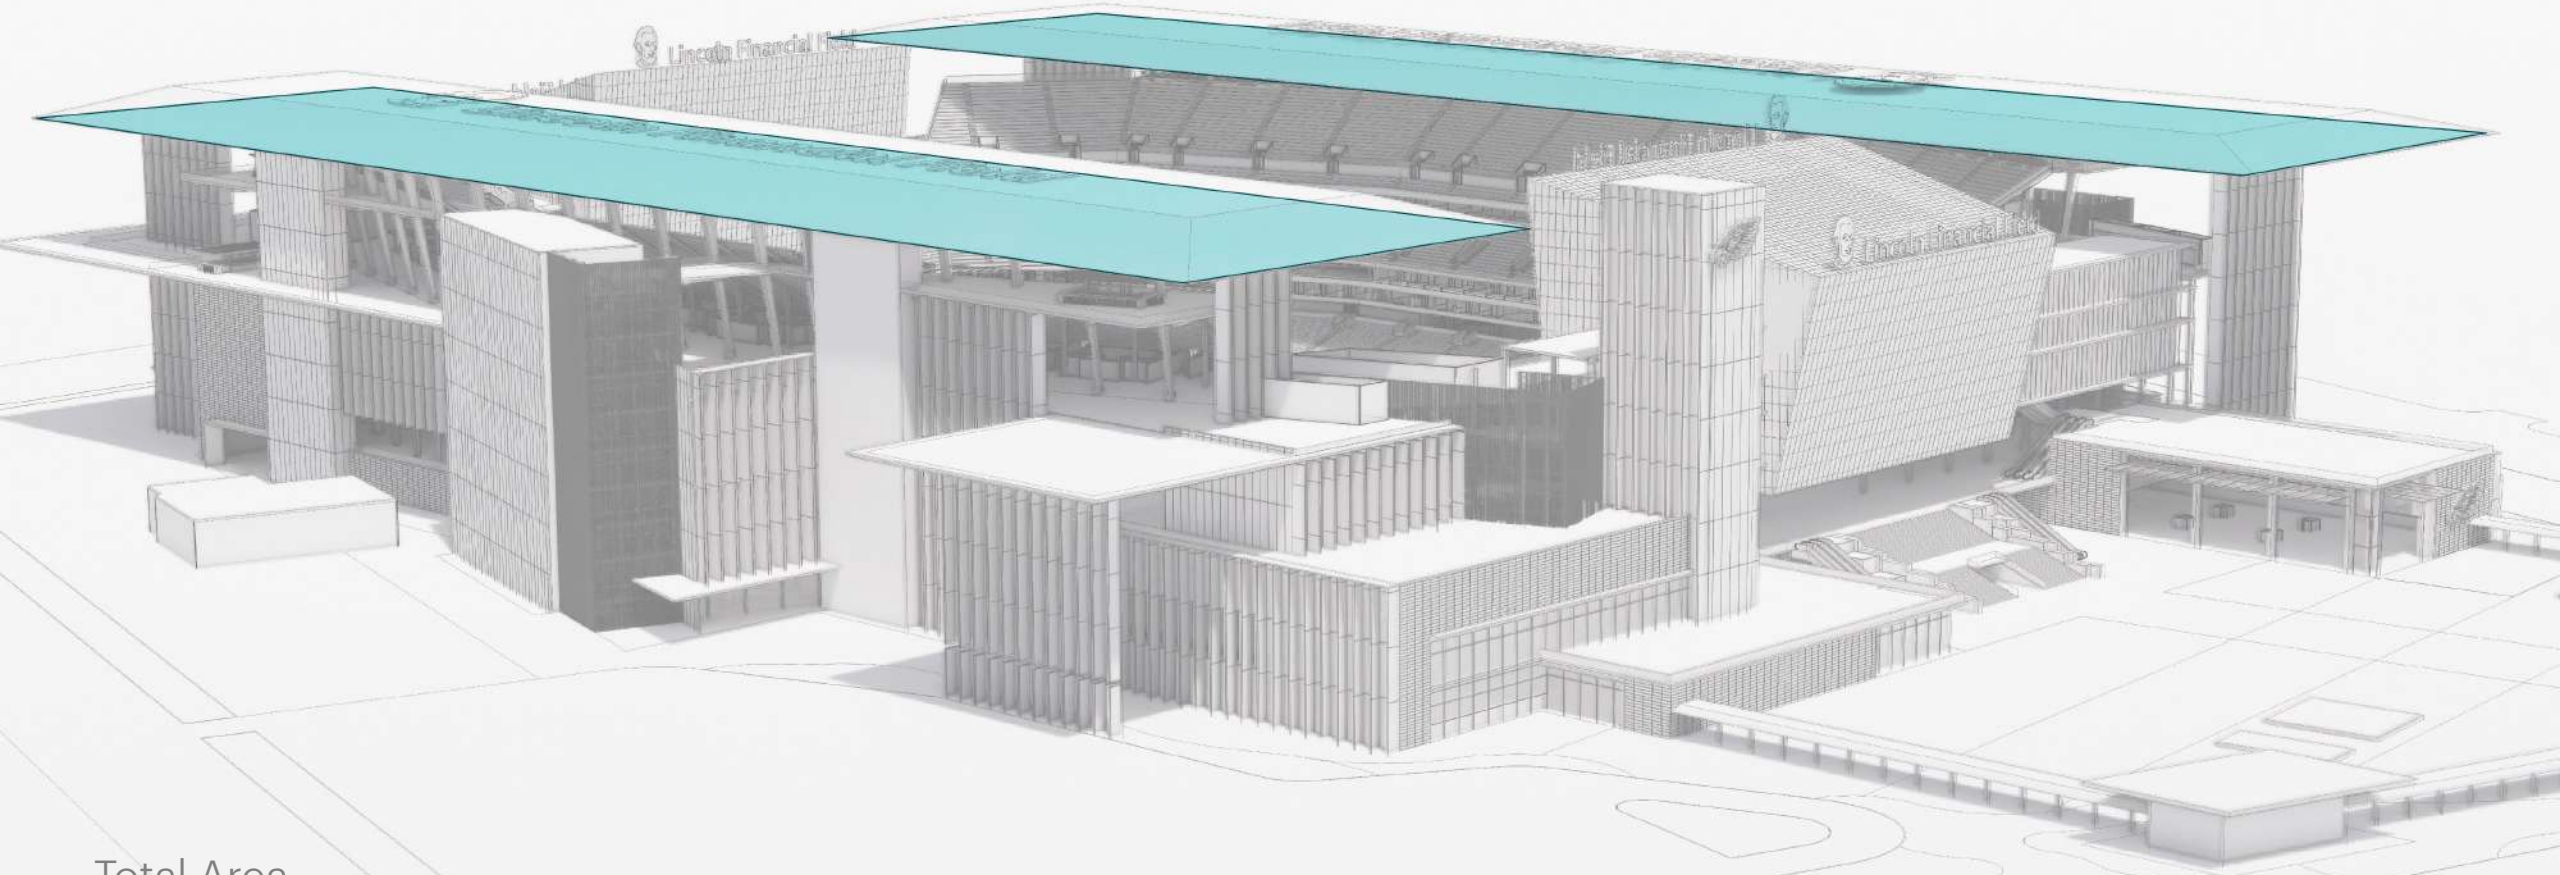

Total Area

365,438 SF

SOFFIT

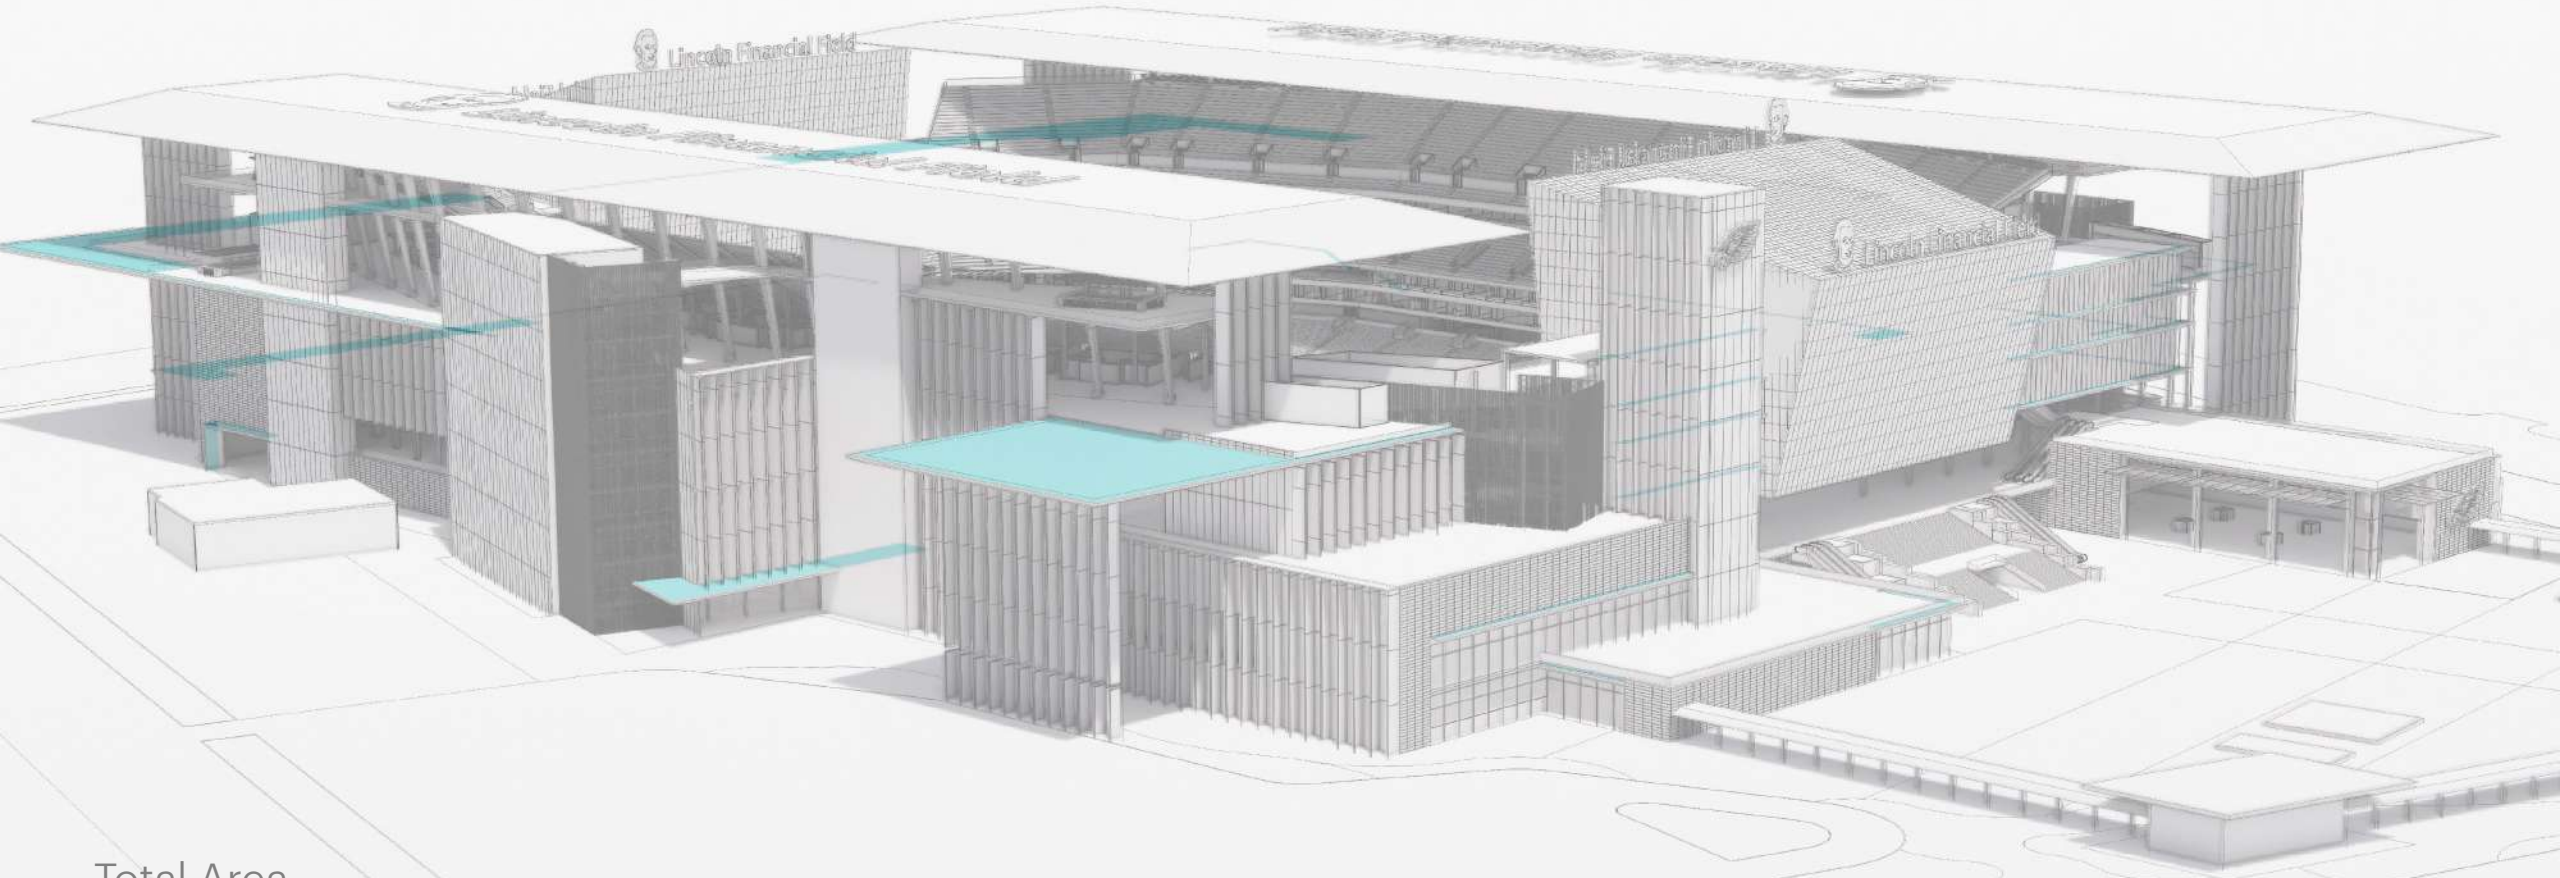

Total Area

79,220 SF

ROOF MATERIALS

ROOF TOTAL
716,408 sf

	MATERIAL	AREA (SF)	
	Reflective soffit	365,438.54	82.2%
	Soffit	79,220.39	17.8%
	Solar panels · on top of structural space frame	TBD	— 9,198 panels – 5.3 MWp
	TOTAL	444,658.93	100%


MATERIAL ASSEMBLIES

BOD:
Cascade Architectural Boardwalk system (Framed & Tensioned)

Powder coated aluminum mesh

Painted Back up Steel as required for support

Tension system to keep mesh rigid

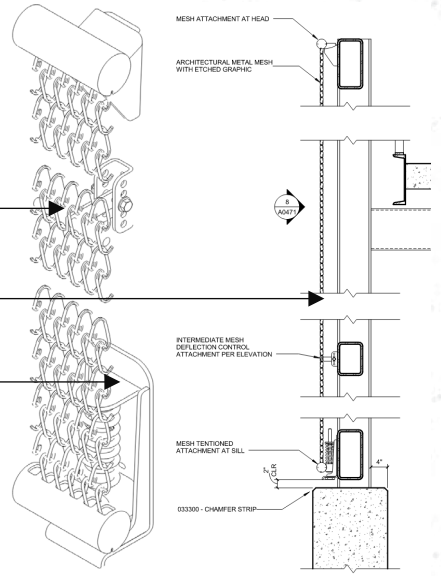


METAL MESH:
ALUMINUM METAL MESH SCREEN

BOD:
Endicott Dark Iron Spot

"Utility" brick unit
3 5/8" x 11 5/8"

Stack bond pattern

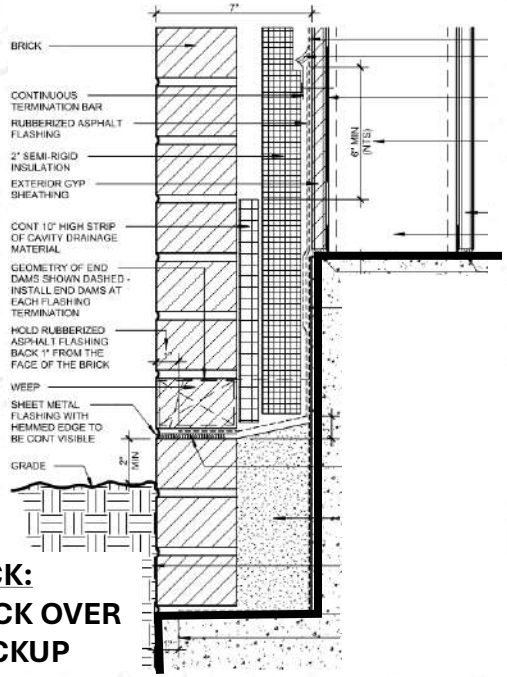


MASONRY BRICK:
IRON SPOT BRICK OVER INSULATED BACKUP

BOD:
Northclad AL Series Over insulated metal stud backup wall

.125" Thick Sheet

PVDF 2 Coat Kynar Custom color

Extruded mounting system

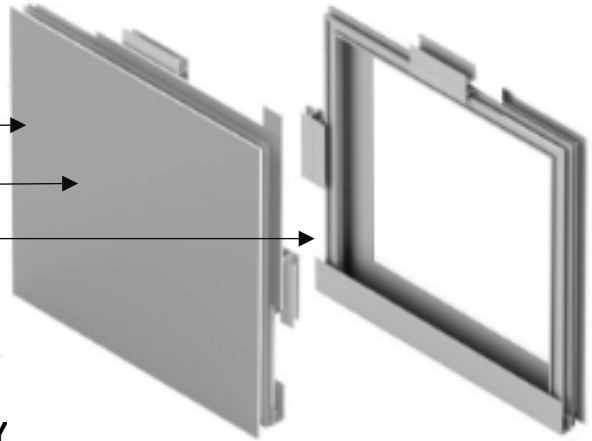


METAL PANEL:
ALUMINUM PLATE FLOATING ASSEMBLY

MATERIAL ASSEMBLIES

BOD:
YKK YUW 750 XT
Thermally broken

Aluminum fin extrusions

Back up Steel as required for support, finish to match CW

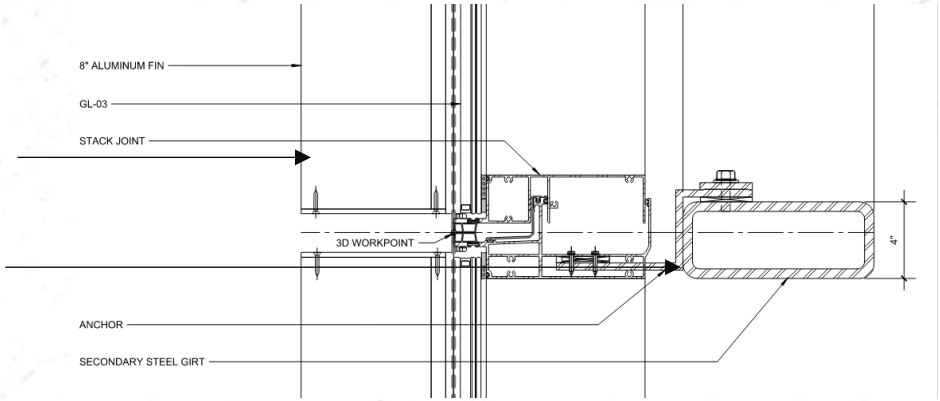


CURTAIN WALL:
UNITIZED CURTAIN WALL SSG

BOD:
Grey PVC roof membrane

Aluminum metal soffit panel, reference renderings.

316 Stainless steel soffit plate, where mirror finish is required

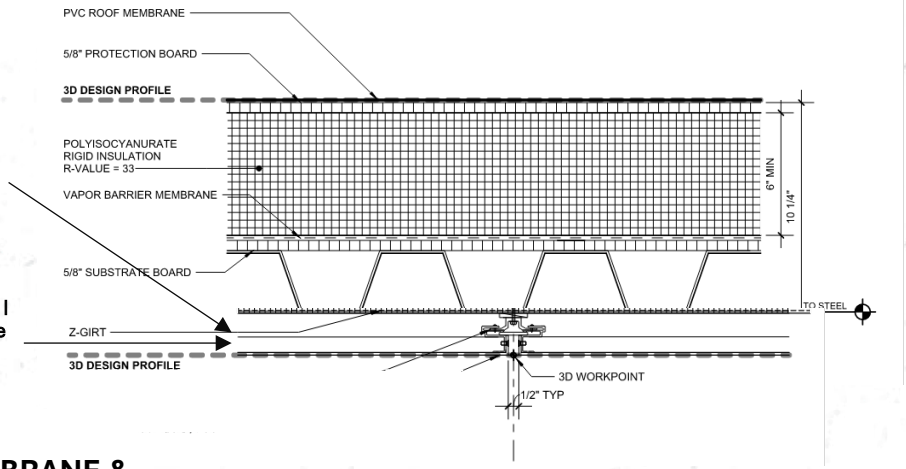


OPAQUE ROOF:
PVC ROOF MEMBRANE & SOFFIT

MATERIAL ASSEMBLIES




EXTERIOR FINS:
ACM WRAPPED STRUCTURAL COLUMN

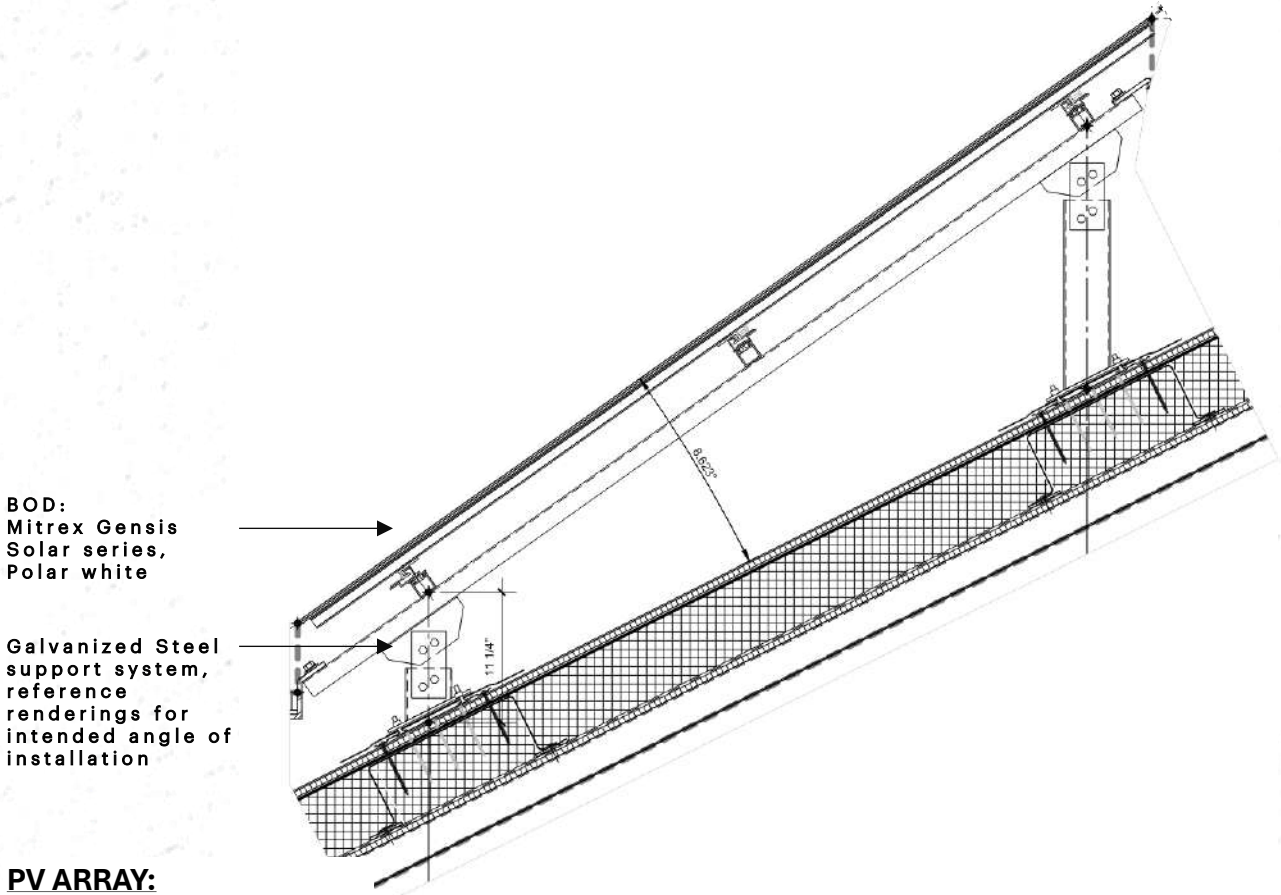


PV ARRAY:
GALVANIZED STEEL SUB FRAME AND CHANNELS

PLAZA VIEW

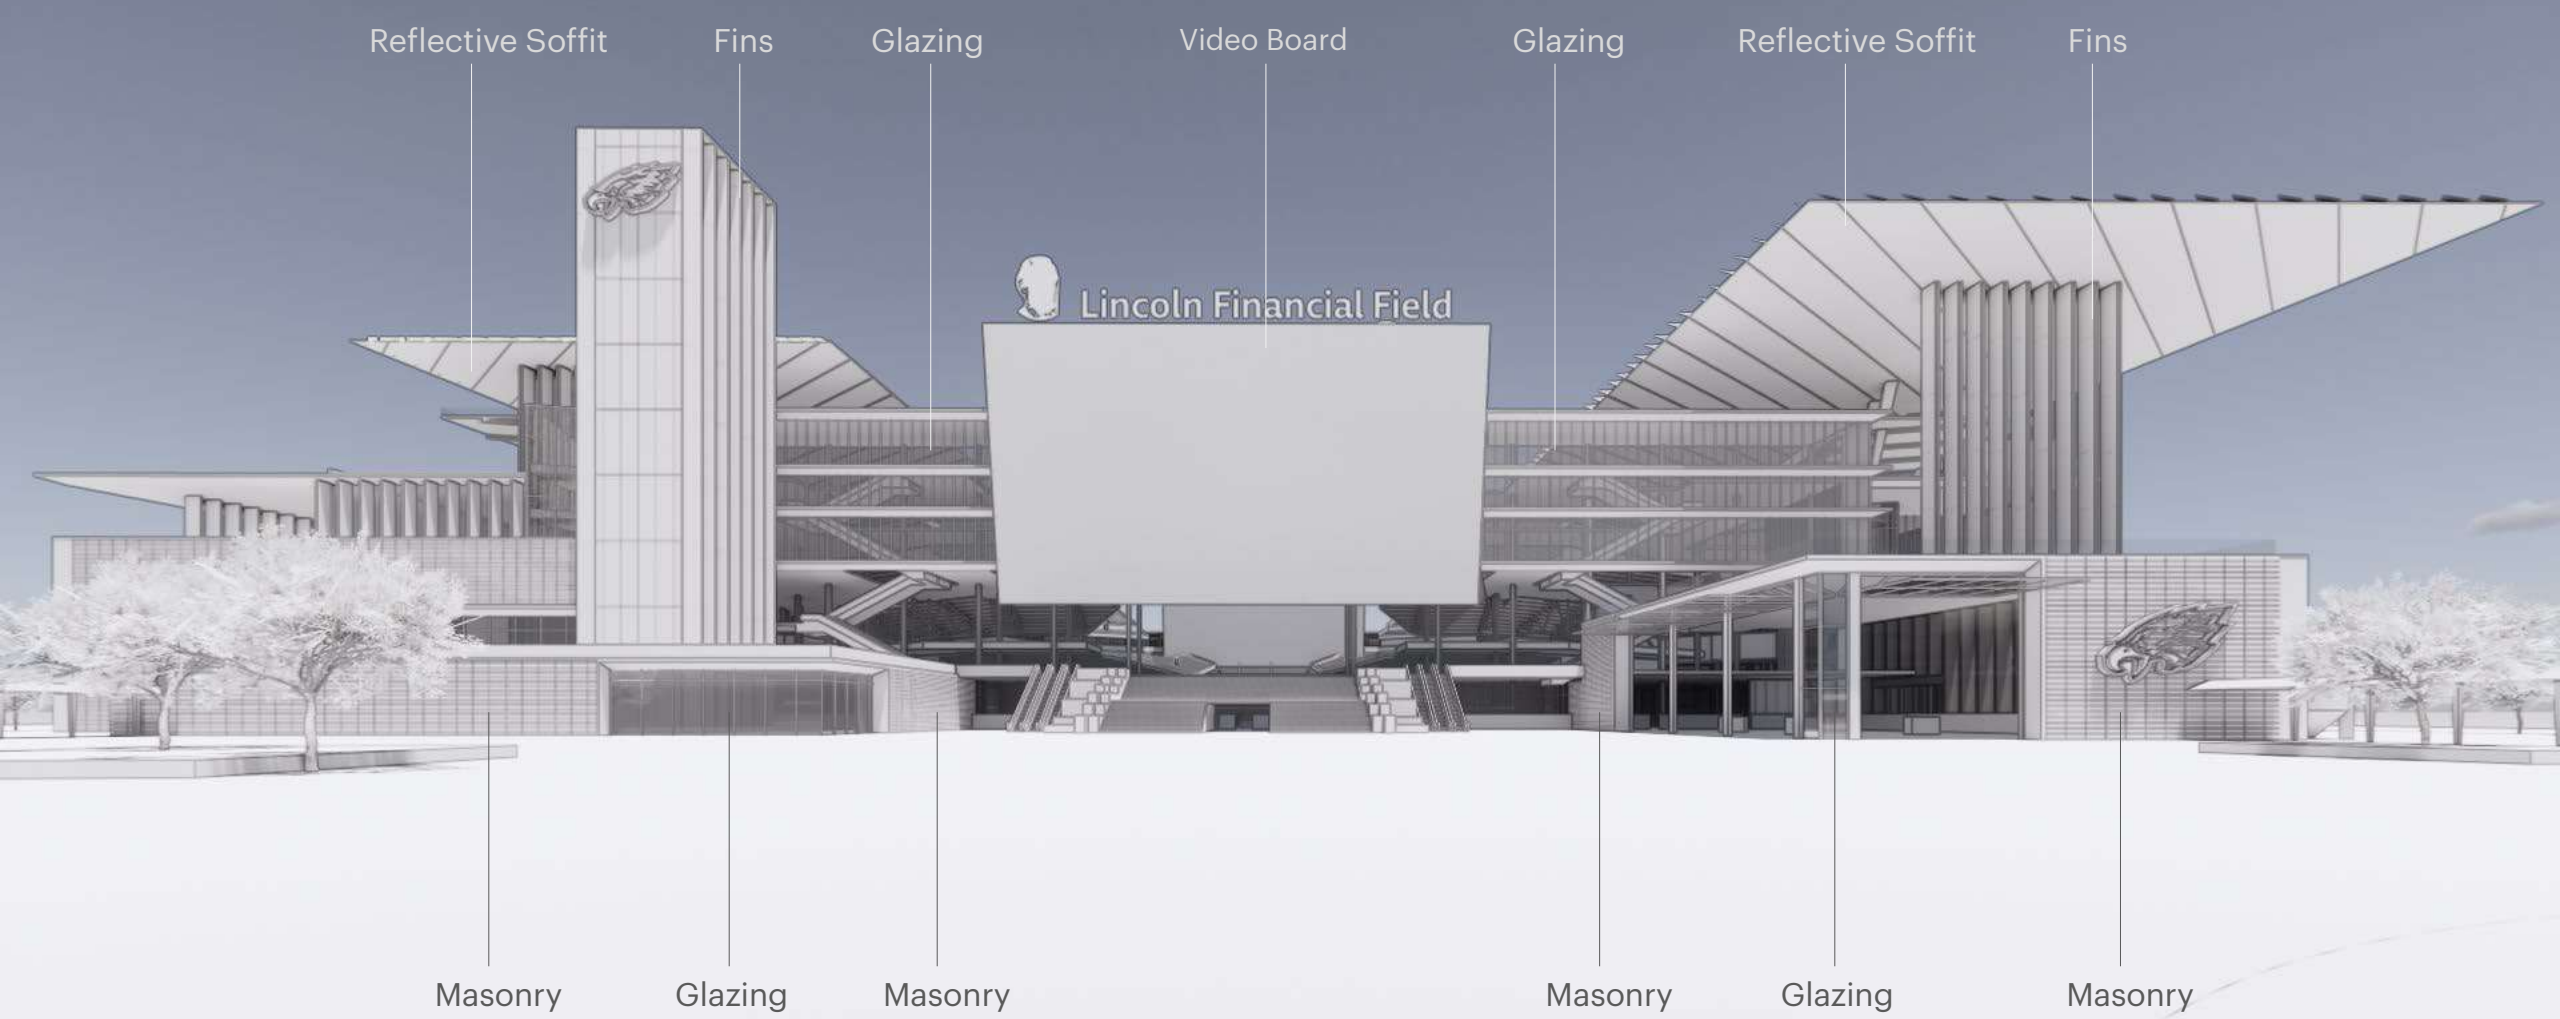
Reflective Soffit
Fins
Glazing
Video Board
Glazing
Reflective Soffit
Fins
Lincoln Financial Field
Masonry
Glazing
Masonry
Masonry
Glazing
Masonry


VIP ENTRY EAST

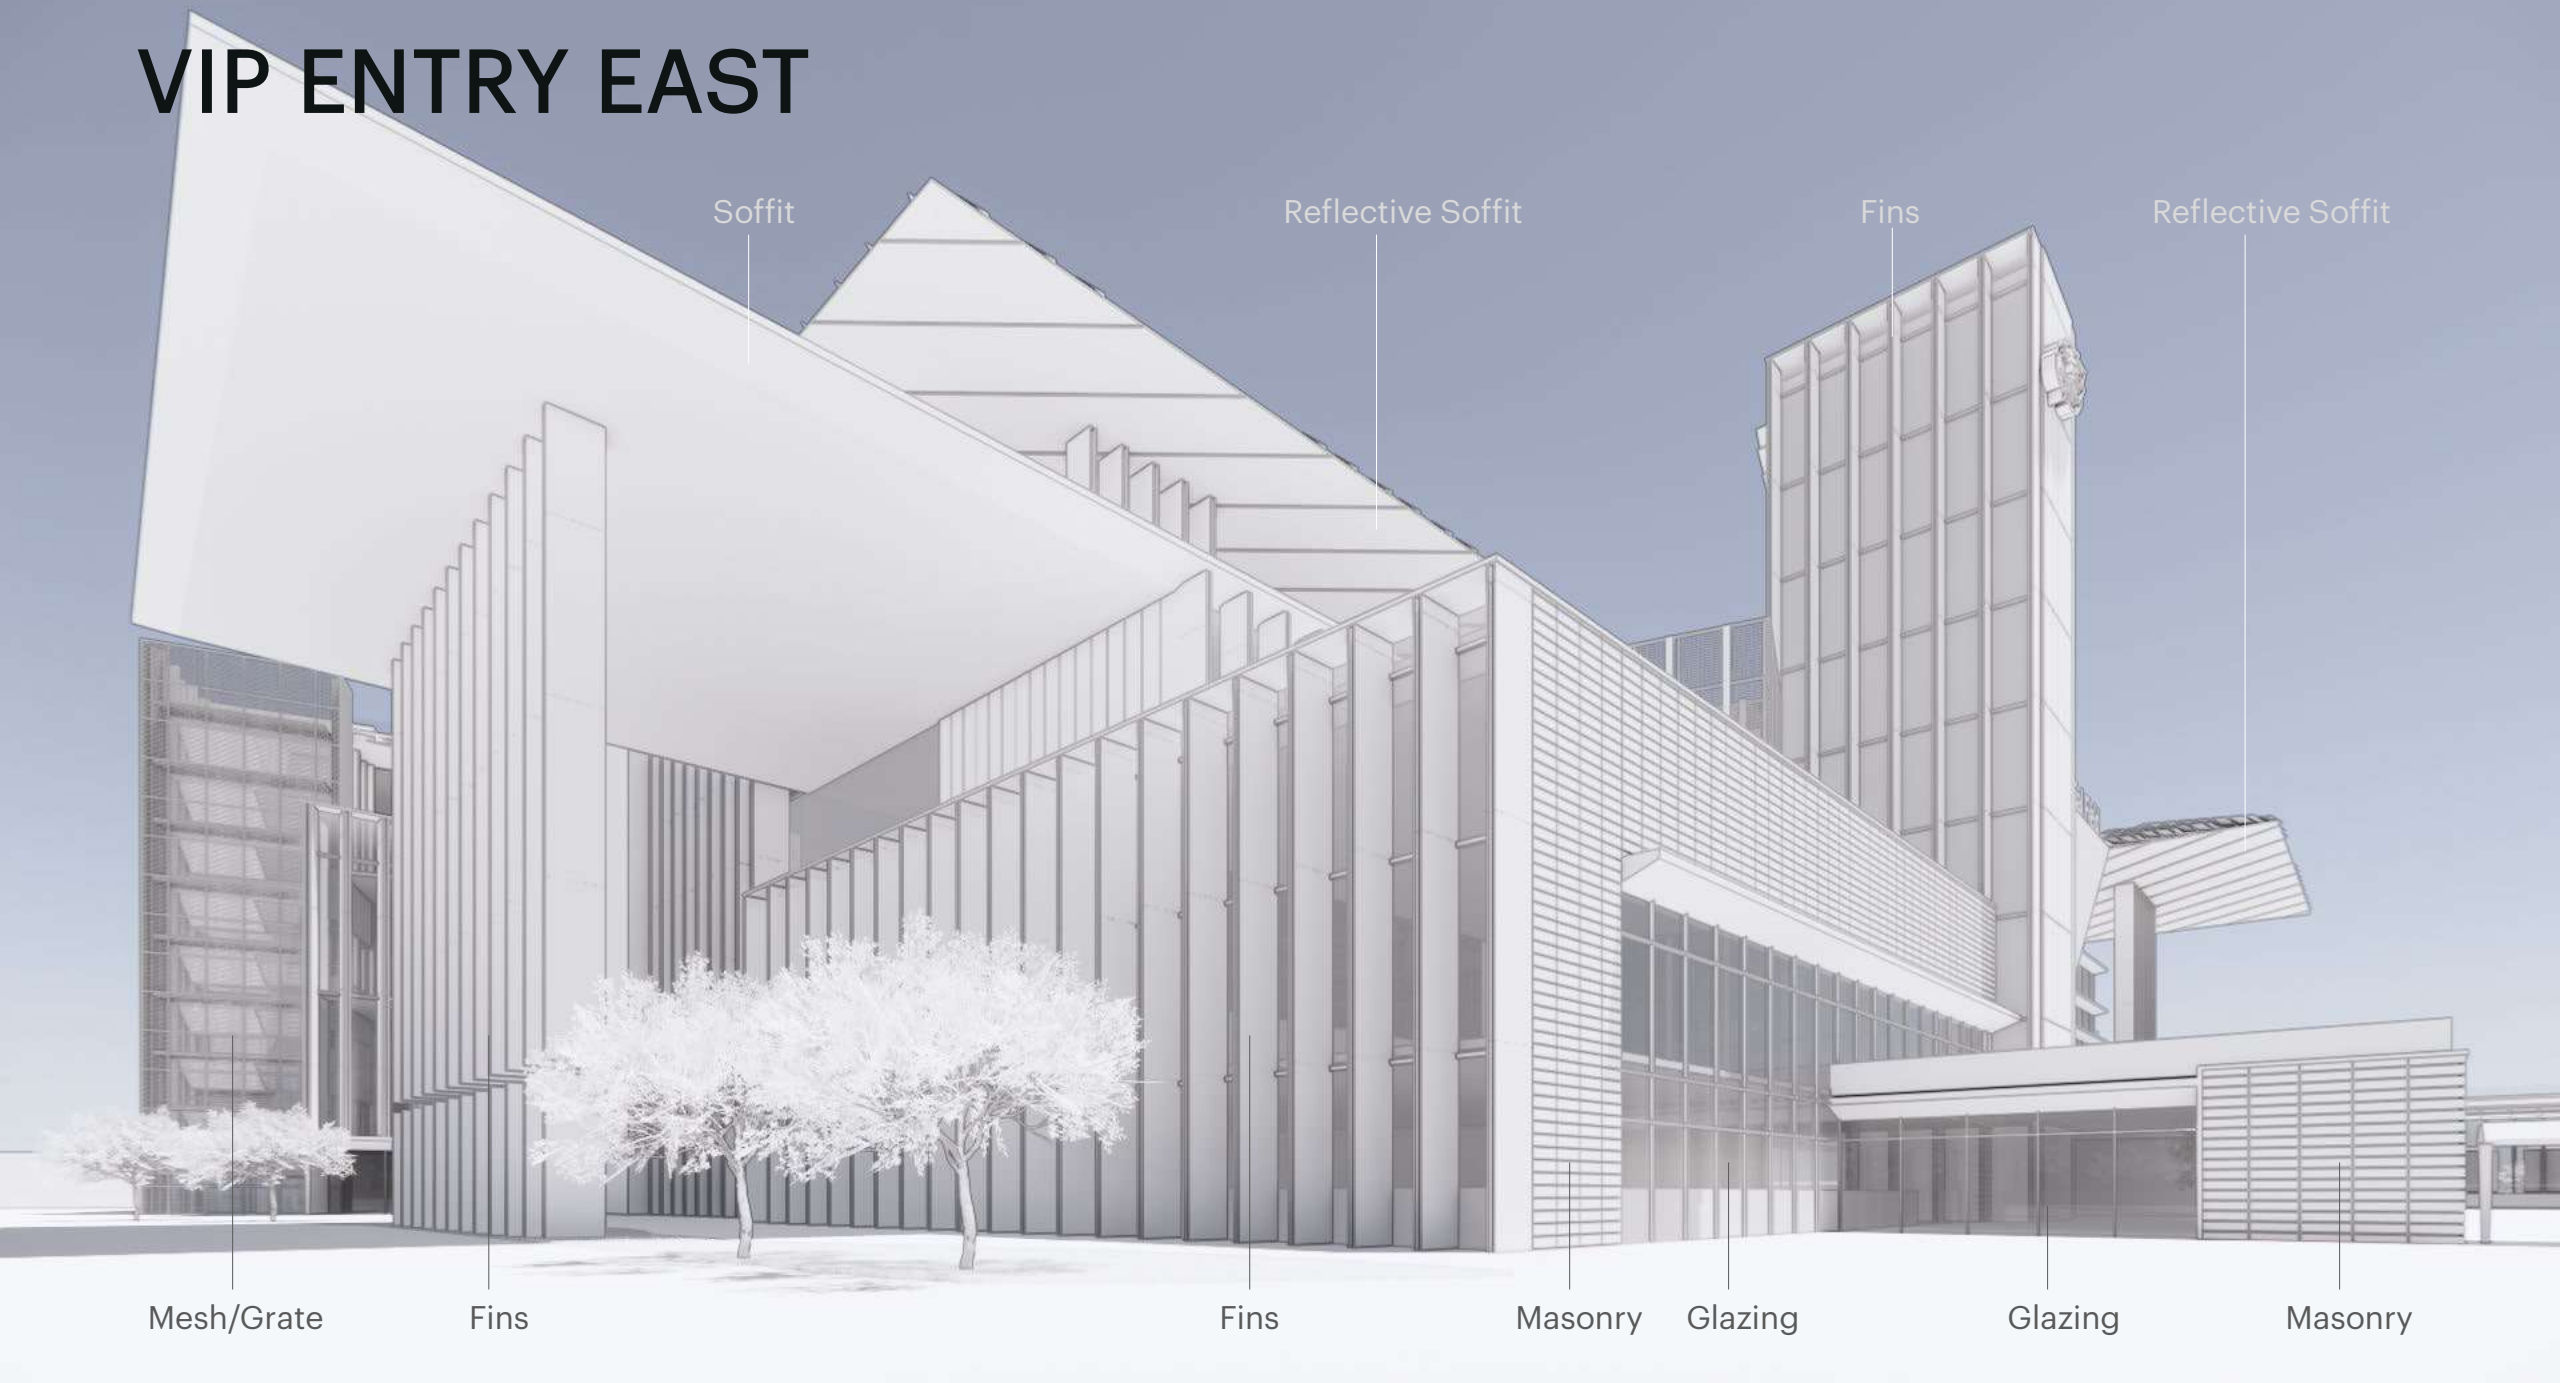


ALTERNATE GA



GA WEST ENTRY

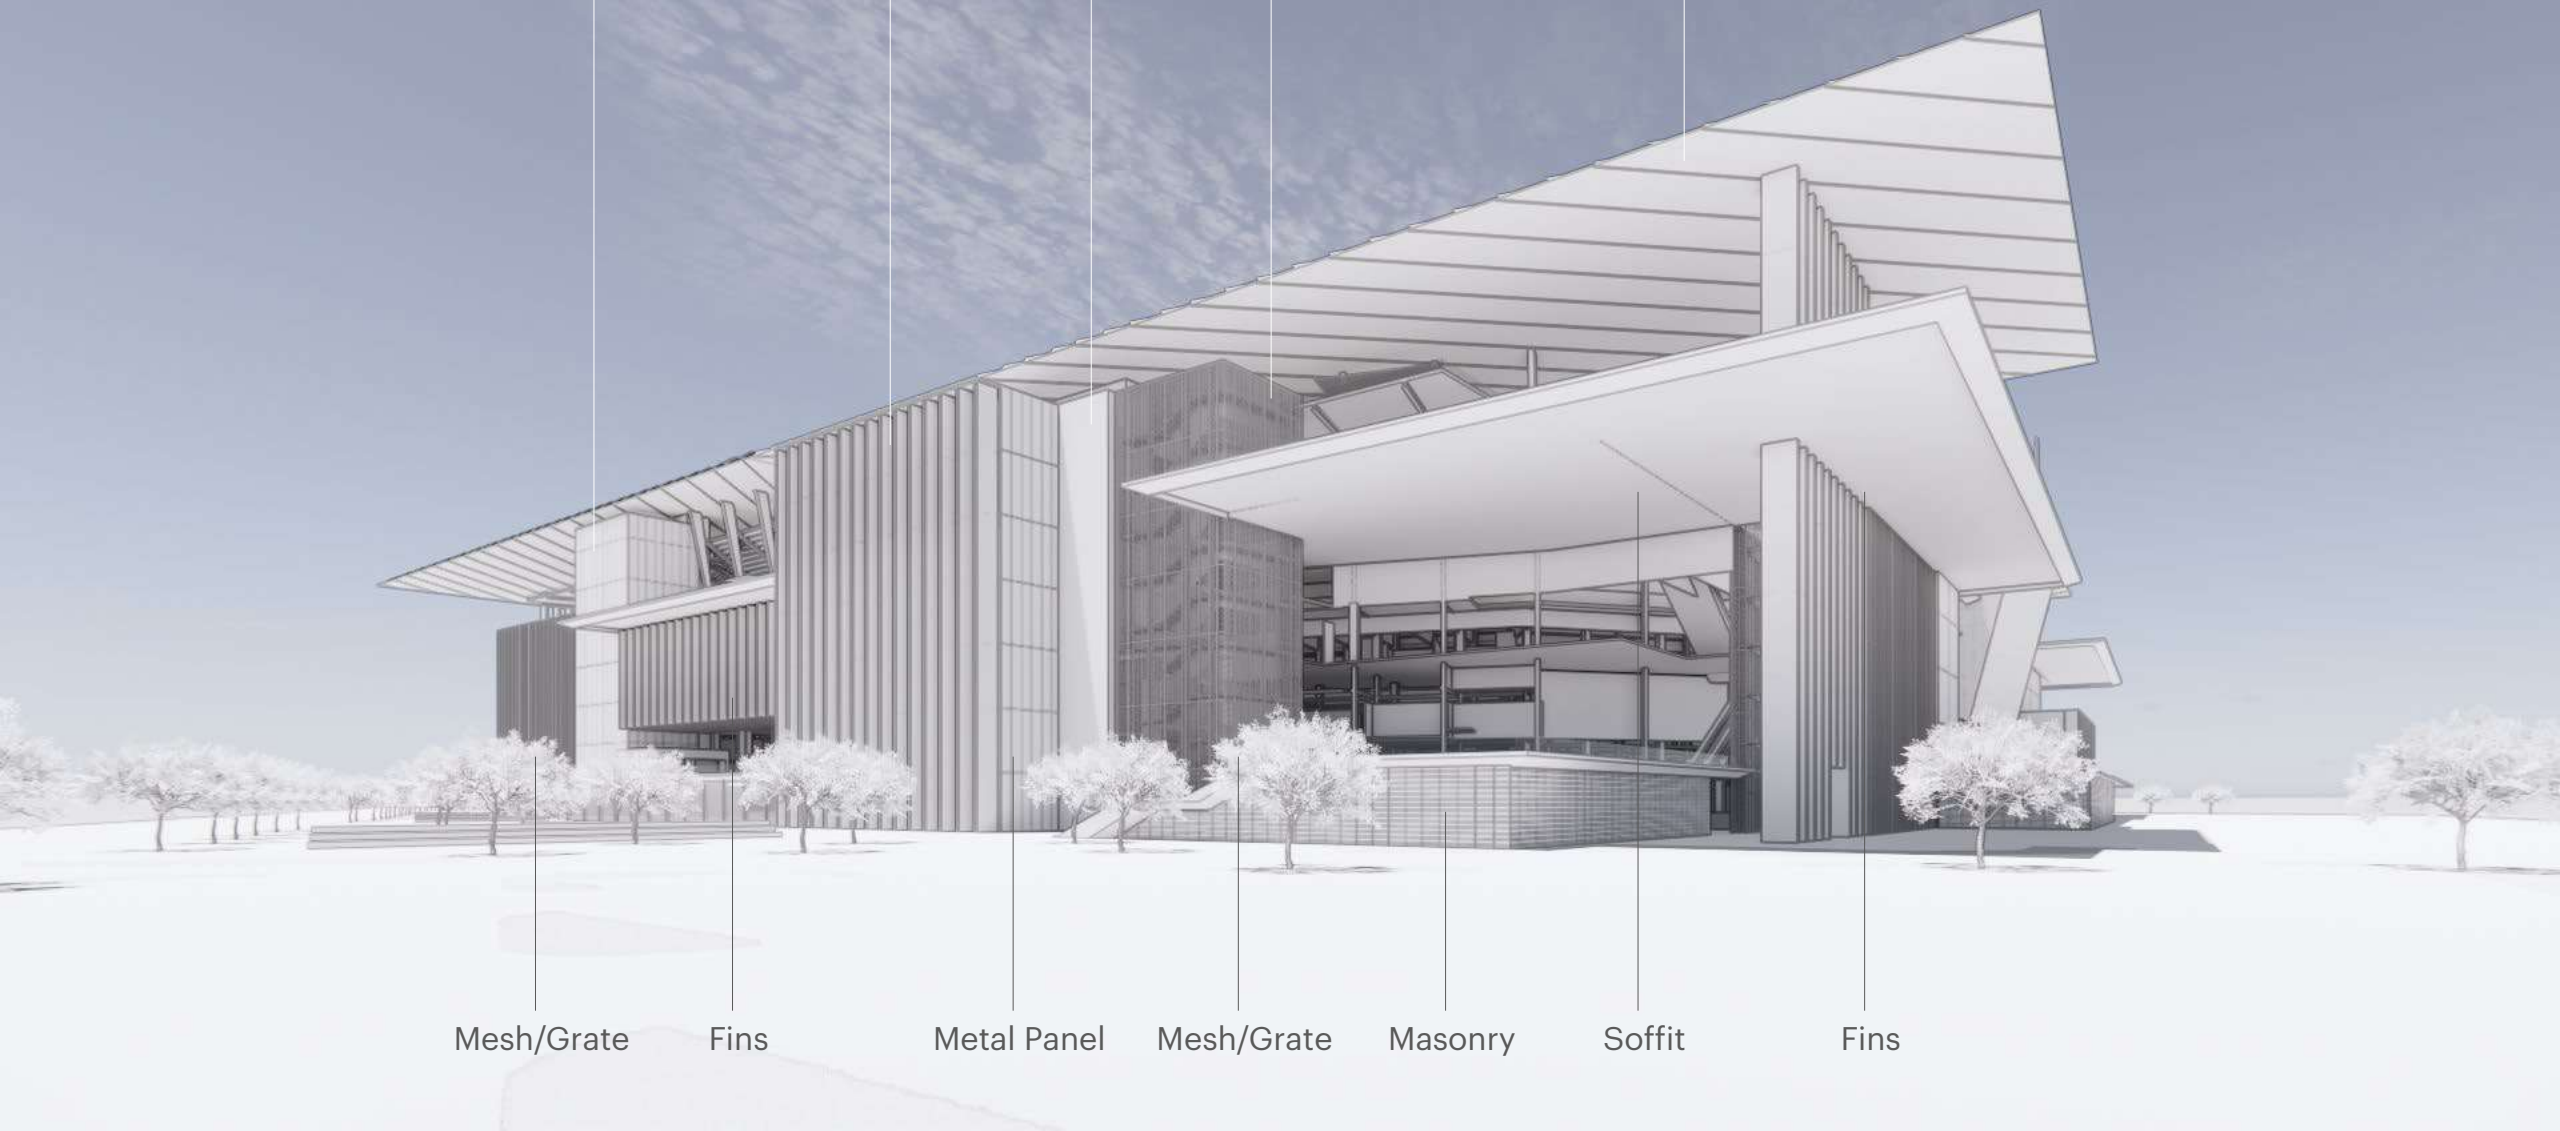


BUILDING ELEVATION - NORTH

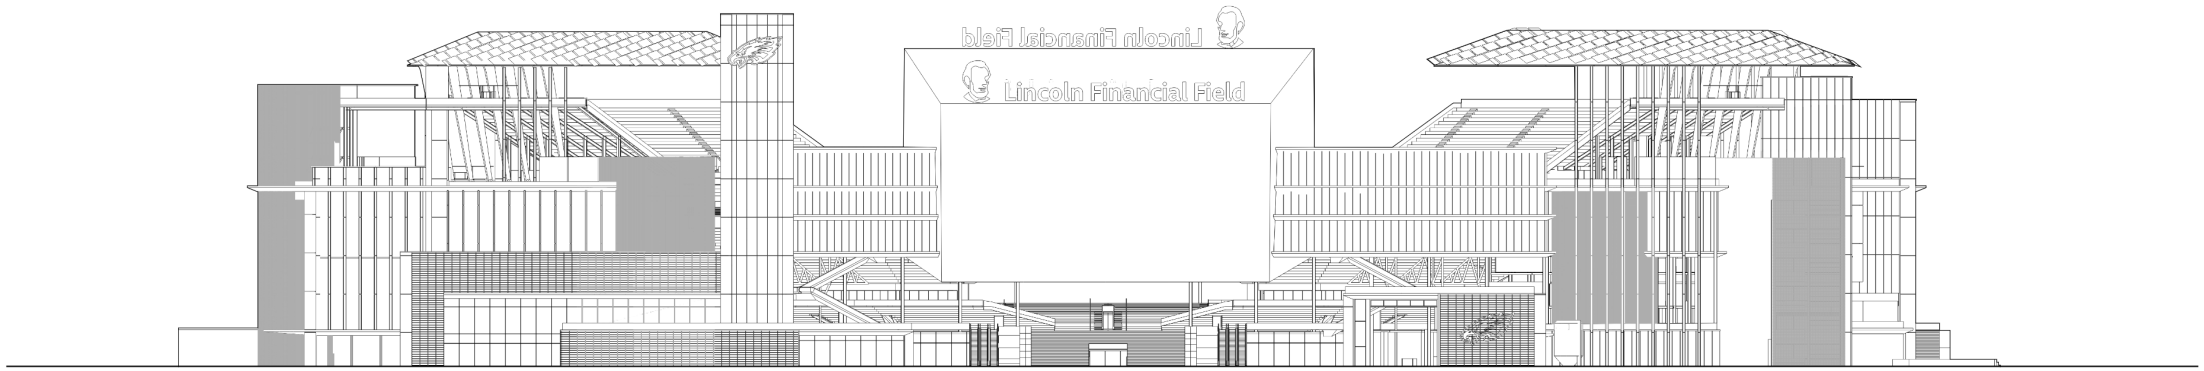


50′ 100′ 150′ 200′

BUILDING ELEVATION - EAST

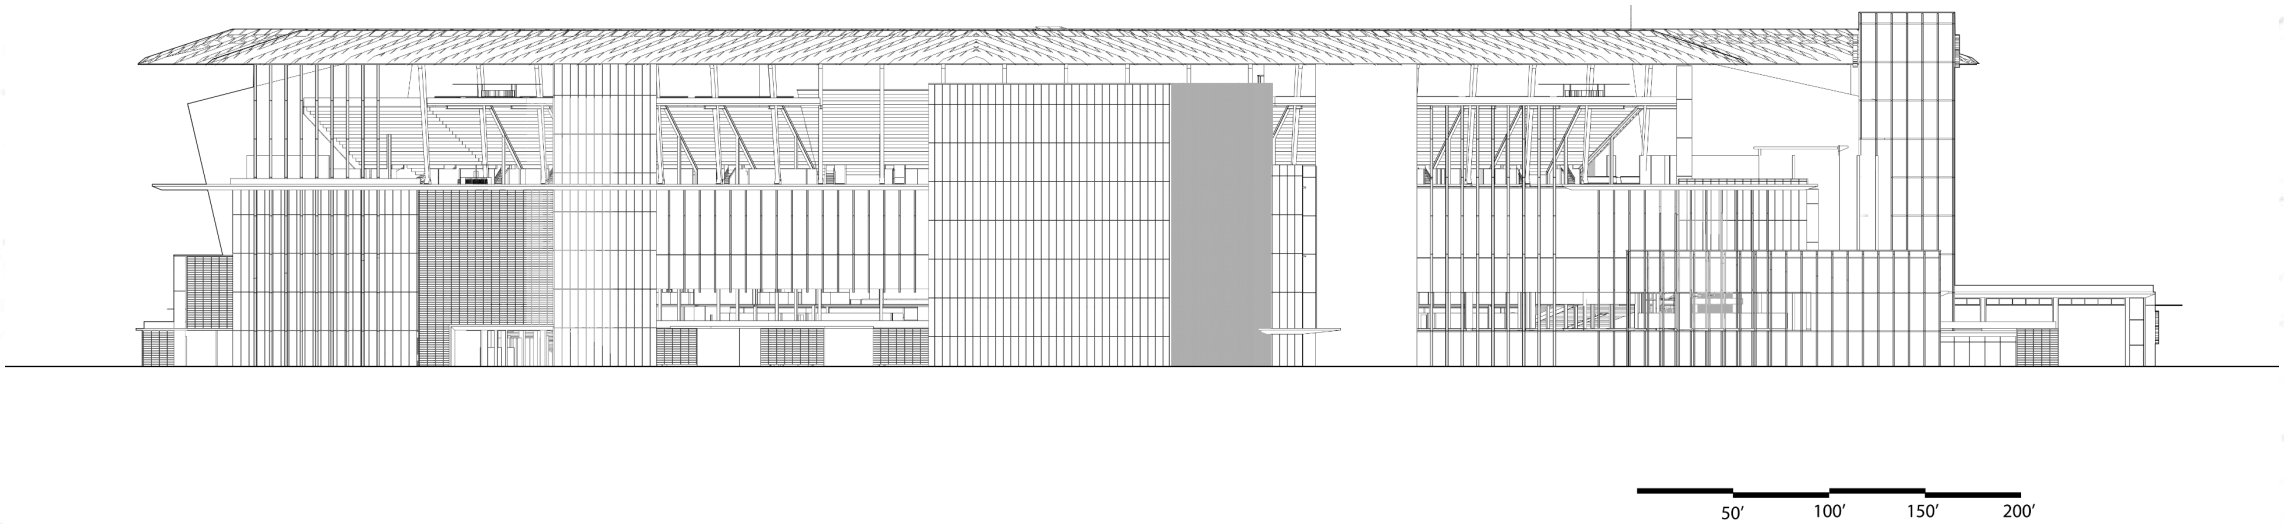


BUILDING ELEVATION - SOUTH

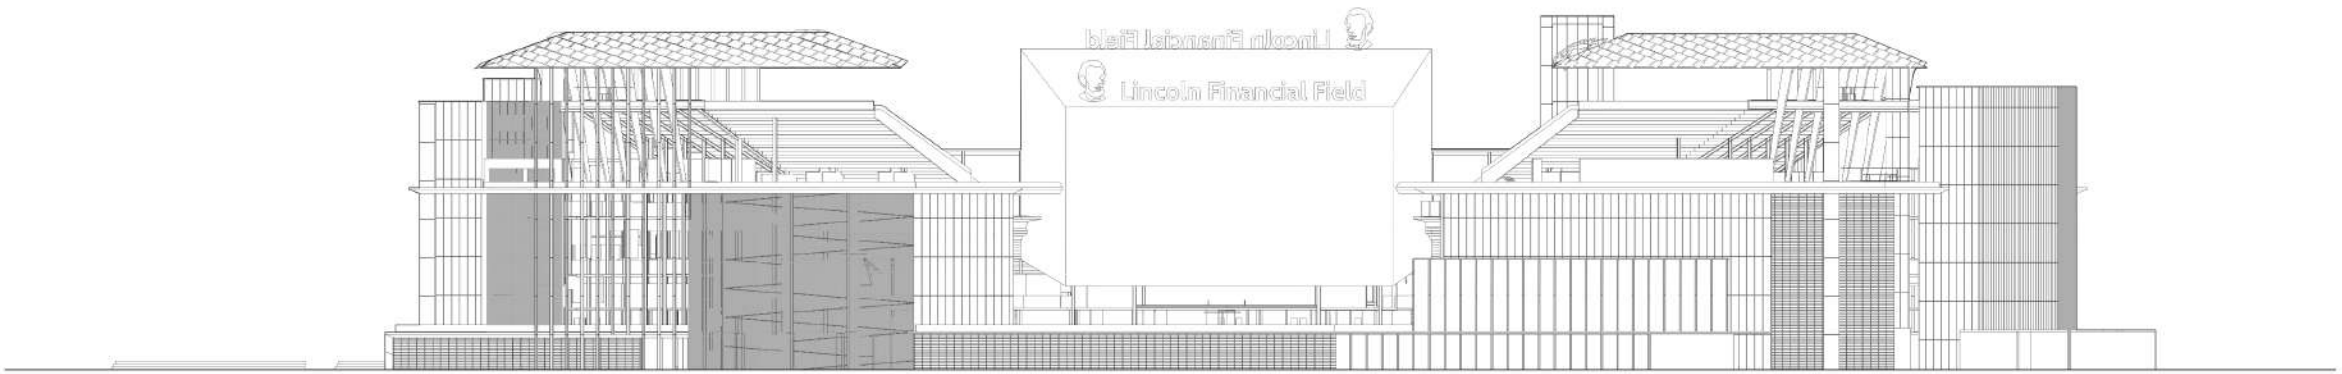


50′ 100′ 150′ 200′


BUILDING ELEVATION - WEST

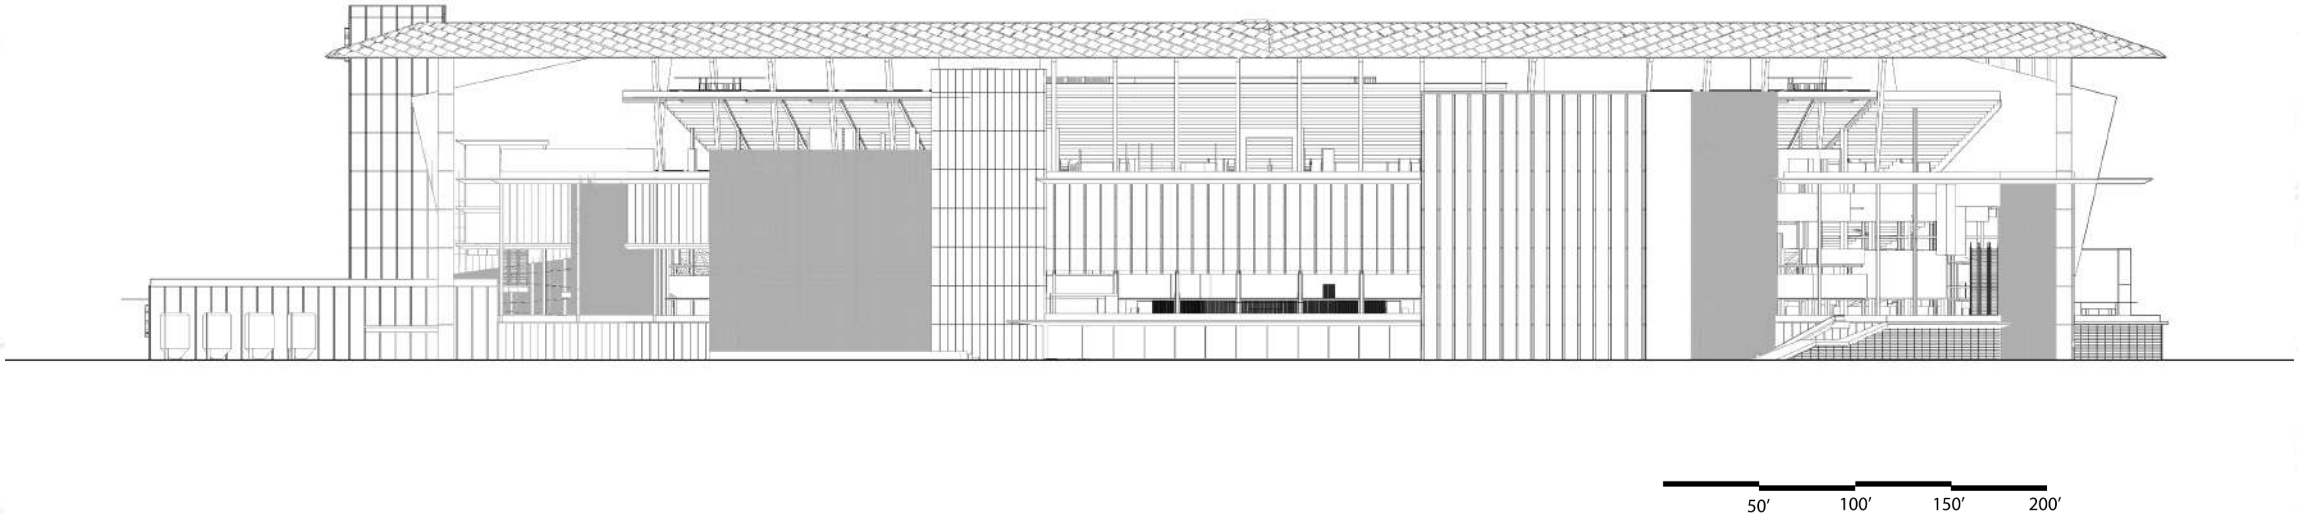

LONG SECTION

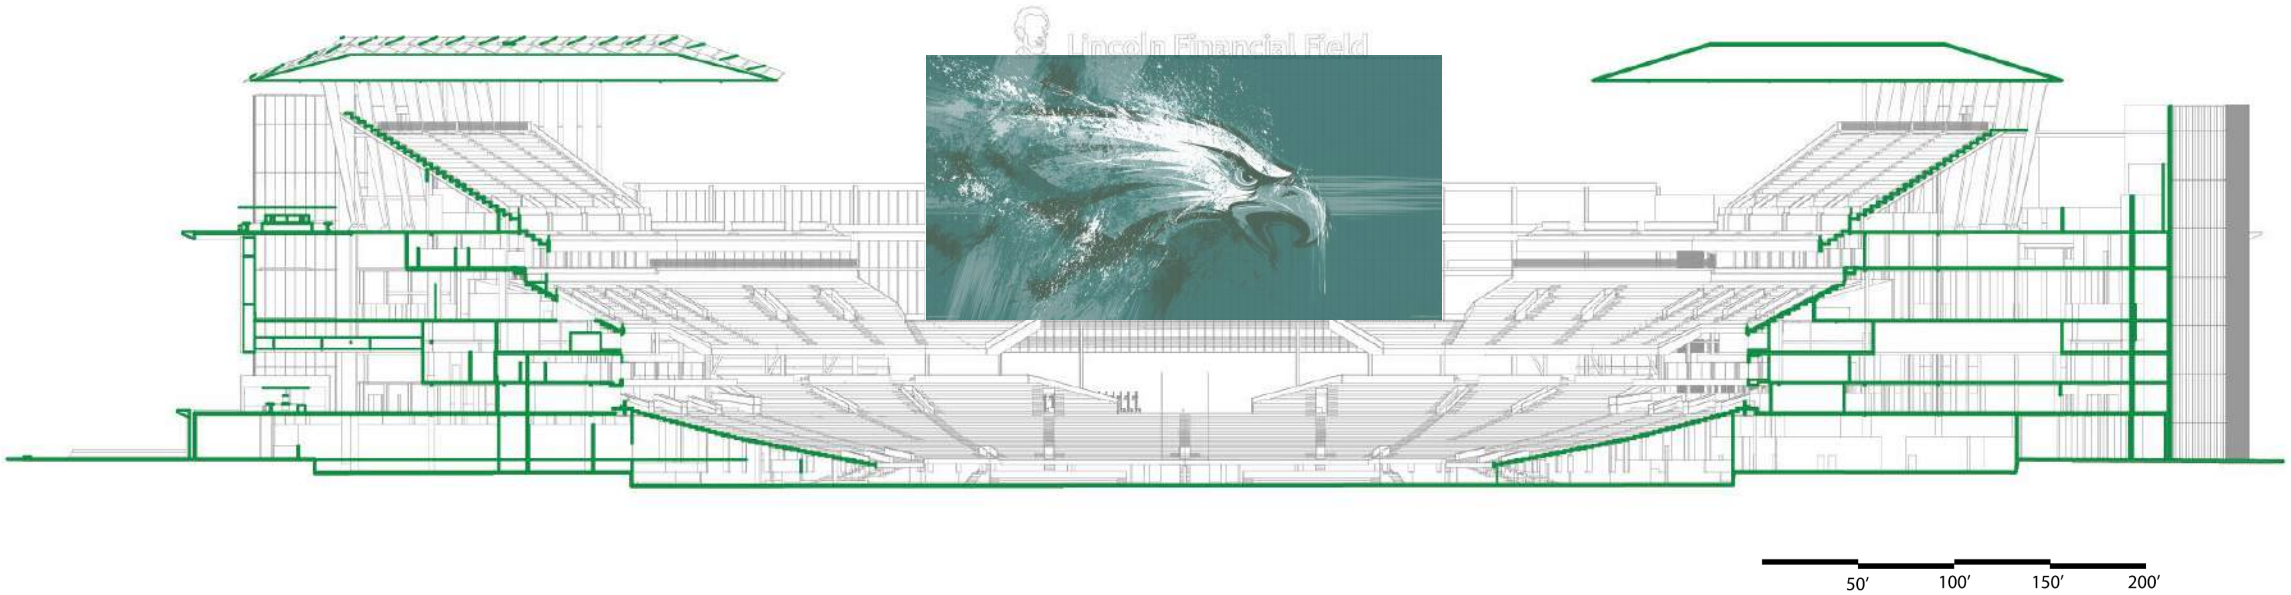

CROSS SECTION

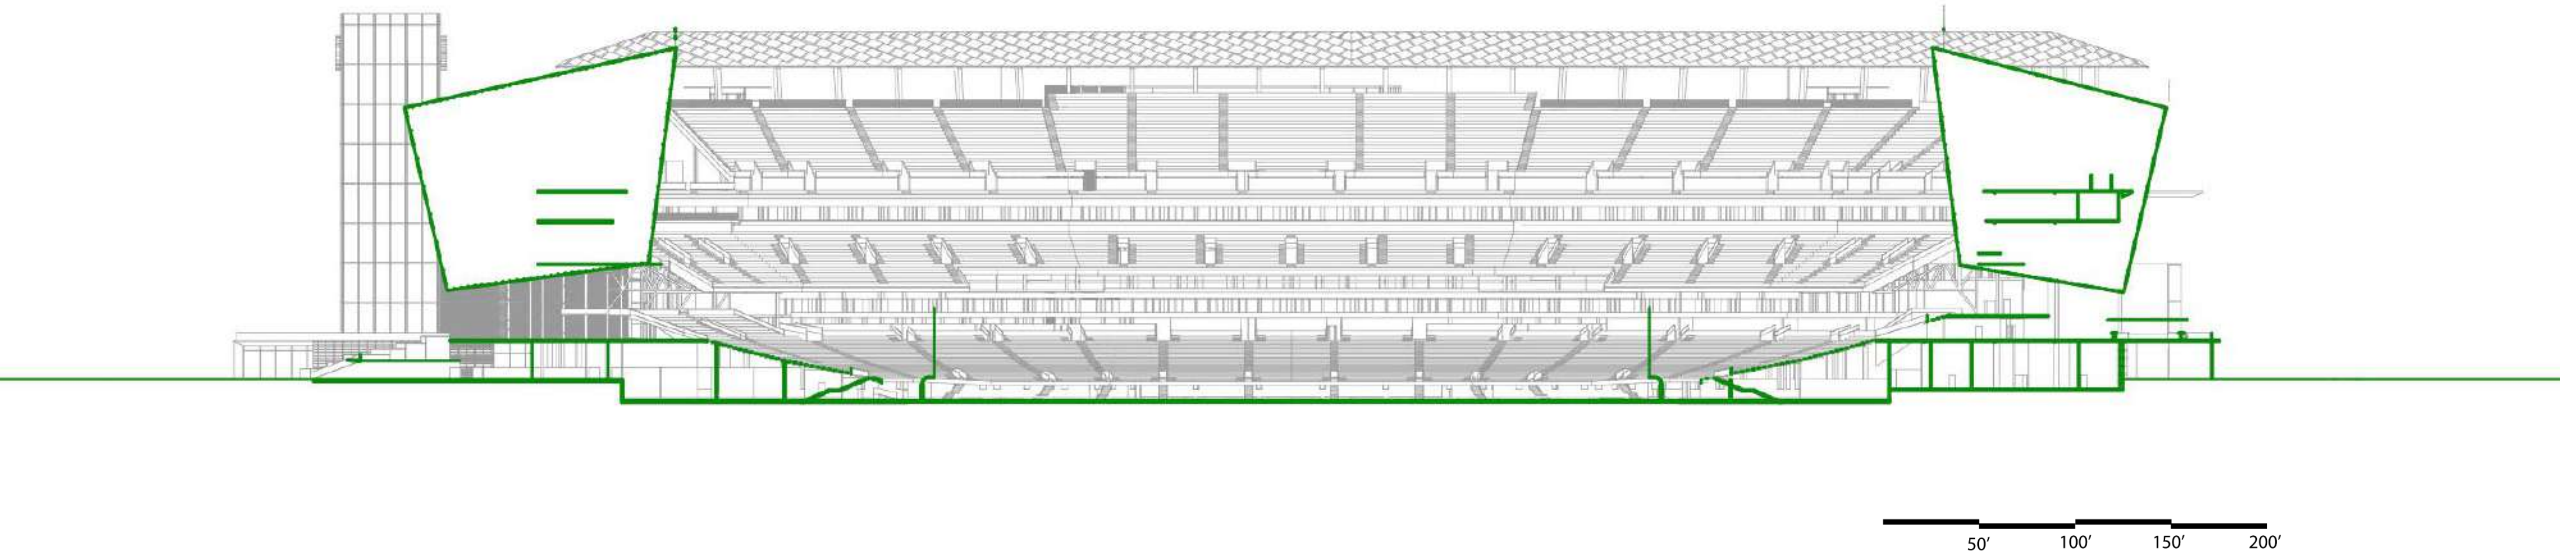


SEATING BOWL

Existing Manifest


100	LOWER BOWL	28,325
C	CLUB	8,716
M	MEZZANINE	2,087
200	UPPER BOWL	26,237
	SUBTOTAL	***65,365***
	FIELD SEATS	273
	SUITES	174 | 4,172
	MINI-SUITES	5 | 60
	TOTAL	***69,870***
	SRO TERRACES	777
	TOTAL with SRO	***70,647***



30′ 60′ 90′

Demolition

	AREA SF
• Field	4,772
• Lower Bowl	1,994
• Lower Suites	9,009
• Pres Suites	
• Club Level	10,507
• Upper Suites	11,057
• Upper Bowl	33,962
• Terrace Decks	3,637
TOTAL	74,937

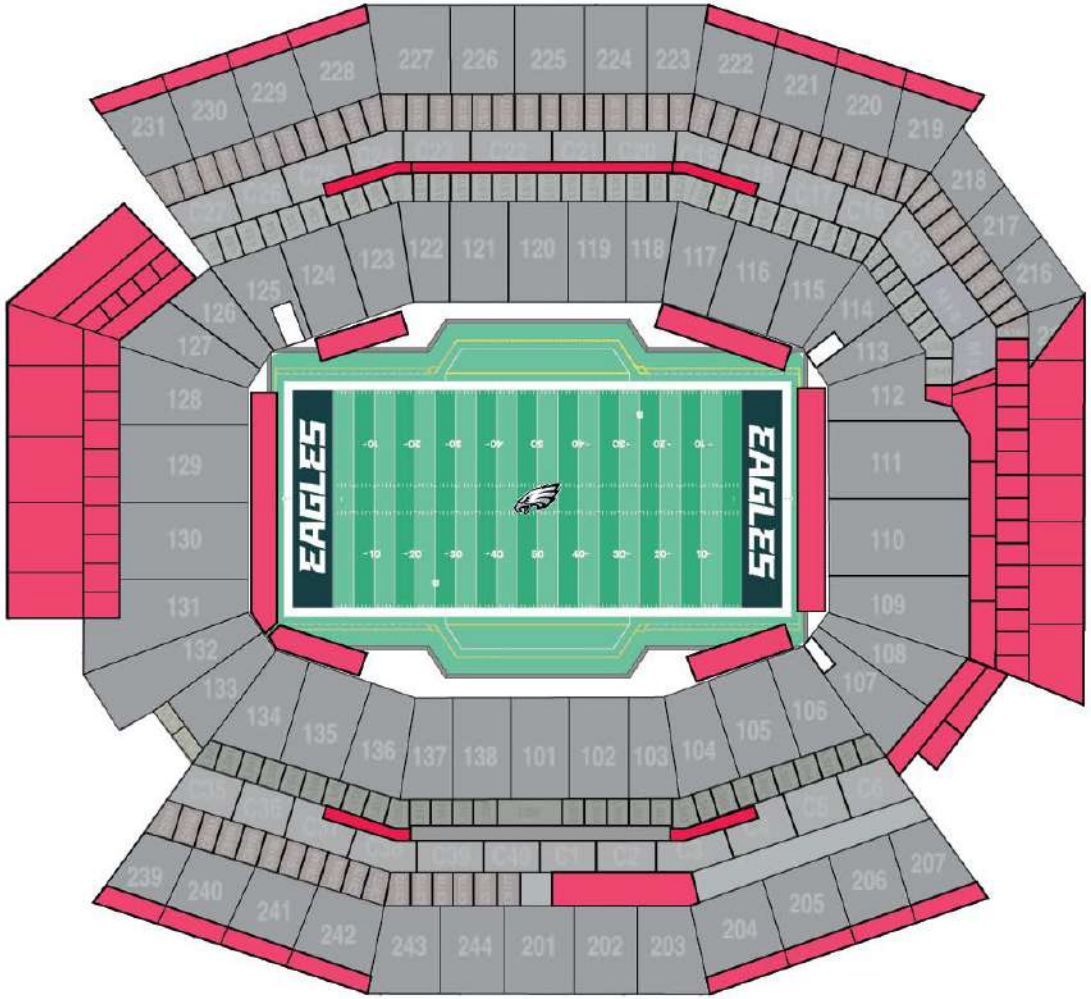


30′ 60′ 90′

Demolition


10 YEAR SCENARIO

	AREA SF
• Field	4,772
• Lower Bowl	1,994
• Lower Suites	9,009
• Pres Suites	
• Club Level	10,507
• Upper Suites	11,057
• Upper Bowl	33,962
• Terrace Decks	3,637
TOTAL	74,937

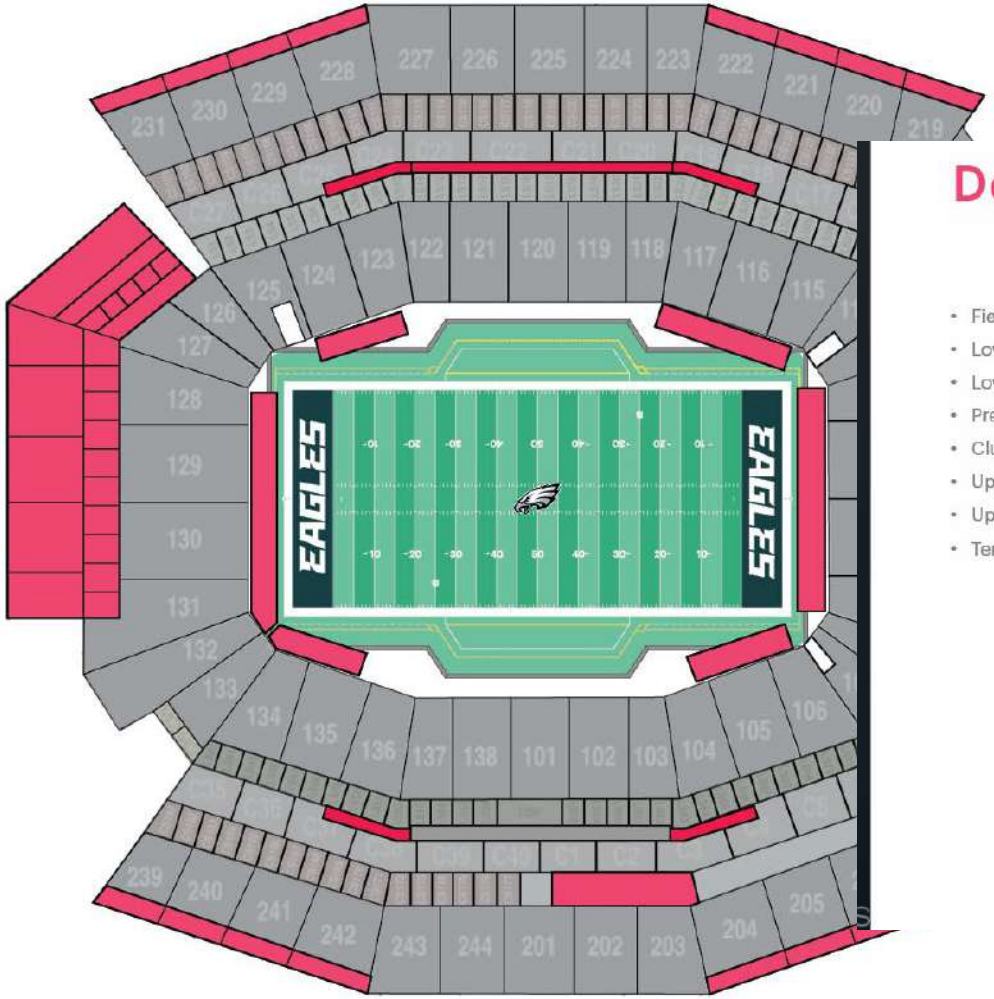

Demolition

	AREA SF
• Field	4,772
• Lower Bowl	1,994
• Lower Suites	9,009
• Pres Suites	
• Club Level	10,507
• Upper Suites	11,057
• Upper Bowl	33,962
• Terrace Decks	3,637
TOTAL	74,937

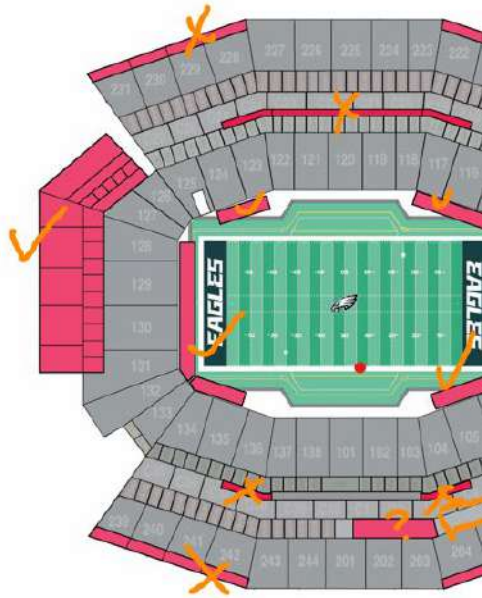


30′ 60′ 90′

New Construction / Vom / Overbuild

	AREA SF	AREA SF	AREA SF
• Field	18,522		
• Lower Bowl	20,266	2,275	68,658
• Lower Suites	6,071		
• Pres Suites	8,056		
• Club Level	17,252	5,555	
• Upper Suites	5,730		
• Upper Bowl	10,418		
• Terrace Decks	10,500		
TOTAL	96,815	7,830	68,658

update

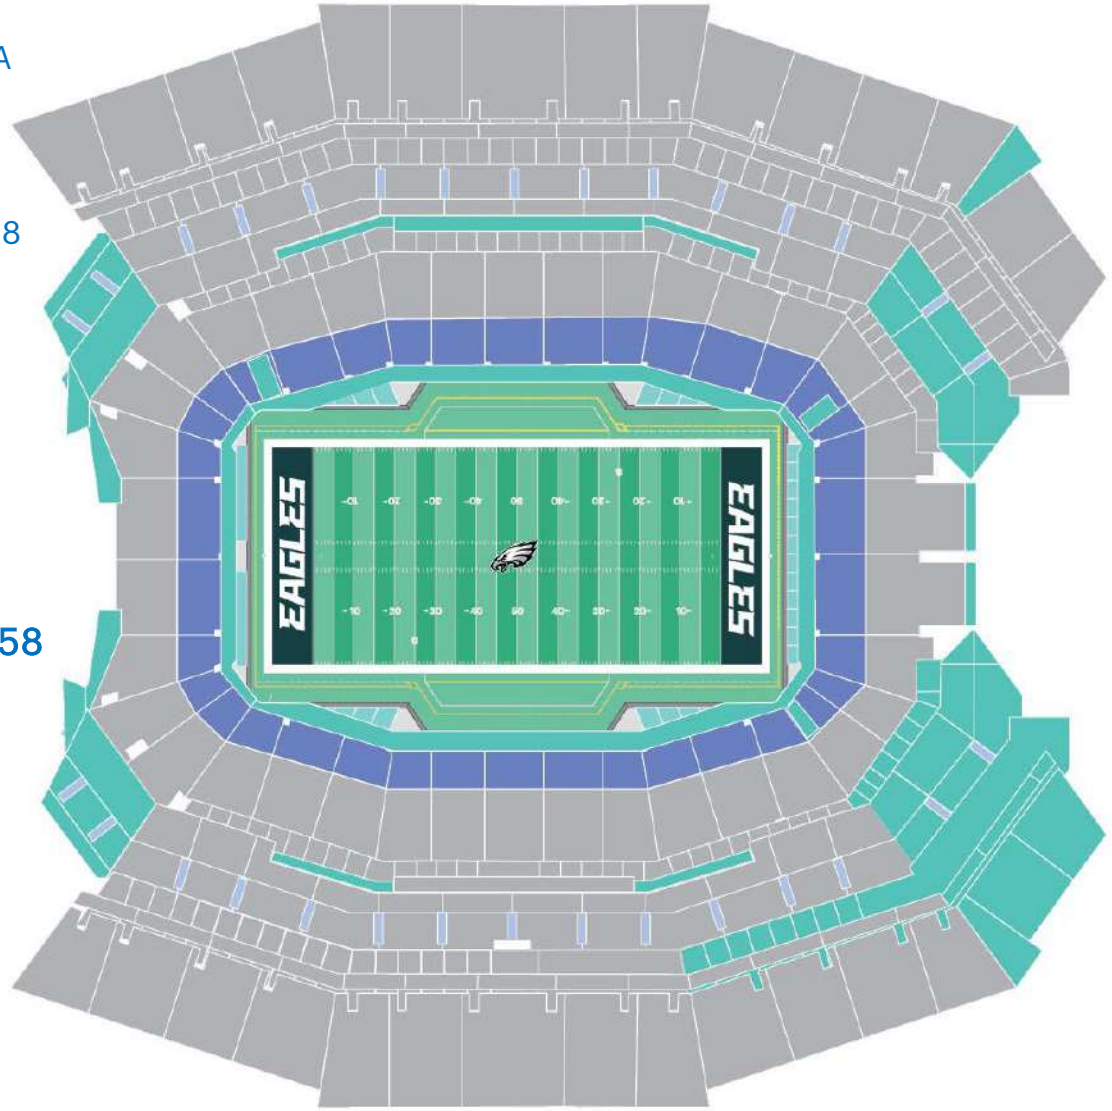


30′ 60′ 90′

New Construction / Vom / Overbuild

10 YEAR SCENARIO

	AREA SF	AREA SF	AREA SF
• Field	18,522		
• Lower Bowl	20,266	2,275	68,658
• Lower Suites	6,071		
• Pres Suites	8,056		
• Club Level	17,252	5,555	
• Upper Suites	5,730		
• Upper Bowl	10,418		
• Terrace Decks	10,500		
TOTAL	96,815	7,830	68,658

update

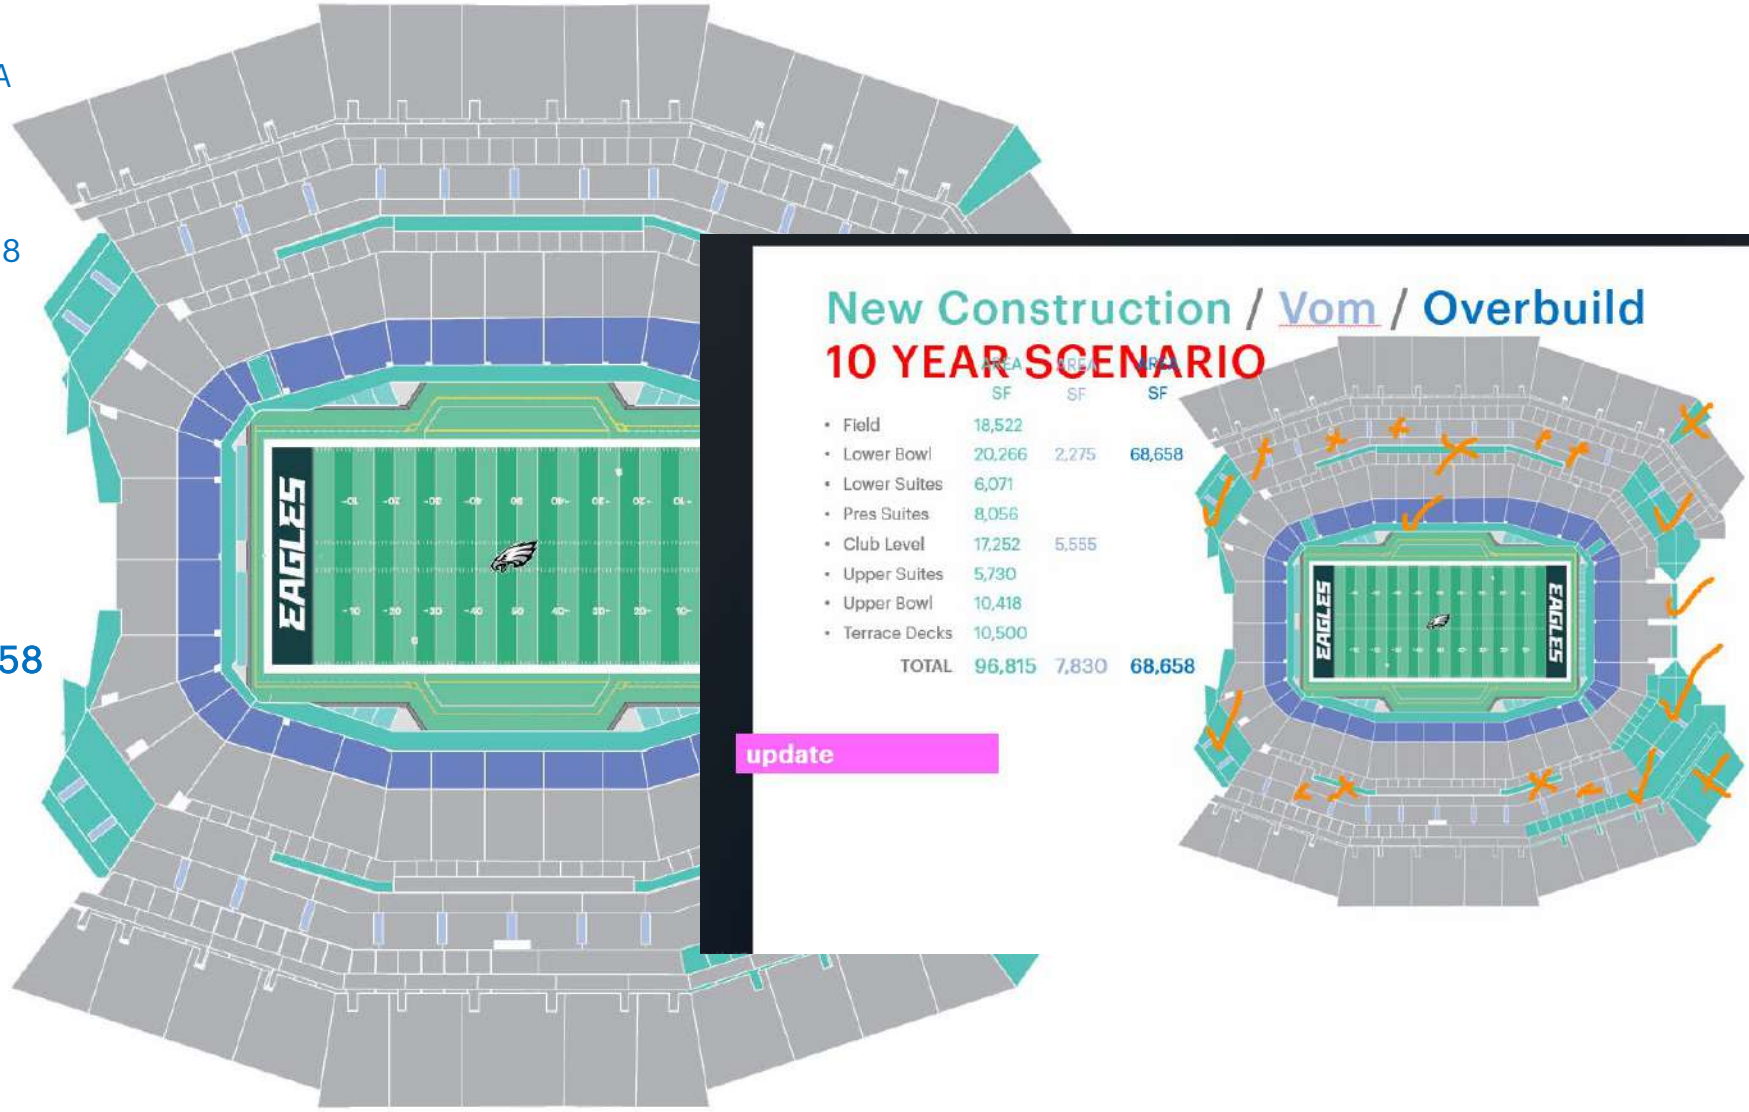

New Manifest

update

100	LOWER BOWL	32,095
C	CLUB	12,941
200	UPPER BOWL	20,696
	SUBTOTAL	*65,732*
	FIELD SEATS	310
	SUITES	205 | 4,832
	TOTAL	*70,874*
	SRO TERRACES	5,787
	TOTAL with SRO	*76,660*



30′ 60′ 90′

update

Original



Proposed



Seating Bowl Design

PRODUCT LADDER

	PRODUCT	CLUB	SUITE	TIER	TOTAL	TOTAL
				A	-	0.0%
250	PRESIDENTIAL CLUB	360	14			
000	TUNNEL CLUBS	-				
300	UPPER SUITES		77	B	612	0.9%
150	LOWER SUITES		80			
	MINI SUITES		4			
000	TOUCHDOWN CLUB	214	157			
200	REDZONE CLUB	316	510	C	590	0.8%
200	FANDUEL CLUB	-	564			
400	CLUB LEVEL	8,785		D	10,884	16%
450	MEZZANINE	2,099				
	GA+	1,920		GA+	1,920	2%
100	GA	28,325				
200	GA	26,237		GA	54,619	80.3%

8 CLUBS

175 SUITES

19% PREMIUM

Seating Bowl Design

NEW PRODUCT LADDER

TYPE	LVL	PRODUCT	CLUB	SUITE	TIER	SF	TOTAL SEATING	PERCENTAGE	FINISH LEVEL
OWNERS CLUB	300	**OWNERS CLUB**	**270**		A	4,662	520	0.6%	5A
VVIP SIDELINE CLUB	100	**THE GUILD**	**250**			35,663			5A
SIDELINE CLUB X2	100	**THE FOUNDRY**	**4,250**		B	35,305	6,042	8.3%	5B
TUNNEL CLUB	100	**NINETEEN33**	**192**			5,668			5B
PRESIDENTIAL	400	**THE AVENUE CLUB**		**746**		32,890			6
VIDEO CLUB		**THE PERCH**	**4,016**			81,890			5B
FIELD SUITES	100	**THE HOMEFIELD COLLECTION**		**640**		10,801			6
NORTH END ZONE CLUB	100	**THE GREEN DOOR**	**310**		C	18,568	3,259	4.5%	5B
LOWER SUITES	300	**THE ROWHOUSE SUITES**		**1,982**		55,852			6
CLUB IN CLUB LEVEL	500	**VICTORY HOUSE**	**967**			7,542			5A
SIDELINE CONCOURSE CLUB	200	**NINTH STREET SOCIAL**	**260**		D	5,668	13,890	19%	5C
LOGE	200	**THE LANDING**		**633**		3,327			5C
CLUB LEVEL	500	**THE BLOCK**	**11,303**			195,957			5B
UPPER SUITES	600	**THE ROWHOUSE SUITES**		**1,654**		49,242			6
CABANAS	200	**THE STOOP**		**40**		3,327			6
UPPER TERRACE	800	**THE GARDEN SOCIETY**			GA+	78,123	-	-%	2
BEER HALL	Plaza	**NEIGHBORHOOD SOCIAL**			GA	17,760	49,453	67.6%	5C
	700	**UPPER CONCOURSE**	**20,696**			266,926			2
	200	**MAIN CONCOURSE**	**28,274**			381,703			2

11 CLUBS

205 SUITES

32.4% PREMIUM

HKS INTERIOR FINISHES

FINISH LEVEL – 01 [General Seating]	
LOCATIONS	General Seating
FLOORING	Sealed Concrete
WALLS	N/A
WALL BASE	N/A
DOORS/FRAMES	N/A
CEILING	N/A
CASEWORK	N/A
COUNTERS	N/A
NOTES	Includes bowl railings

FINISH LEVEL – 02 [Concourse Areas]	
LOCATIONS	Concourse Areas: Concourse, Public Restrooms, Concessions, Spectator Services
FLOORING	Sealed Concrete at Public Concourse and Public Restrooms Epoxy at Concessions, bars and kitchens Vinyl Composite Tile at Spectator Services
WALLS	Painted Gyp, Painted CMU Block Walls FRP in kitchens and bars Ceramic / Porcelain Accent Tile at Bars, Concessions, Restrooms
WALL BASE	Vinyl Base Integral Epoxy Base at Concessions
DOORS/FRAMES	Painted Hollow Metal Doors and Frames
CEILING	Exposed Structure Gypsum Soffits and Acoustical Ceiling Tile at Concessions and Spectator Services
CASEWORK	Metal at FOH casework BOH included in Food Service Equipment package
COUNTERS	Quartz at FOH Countertops BOH incldued in Food Service Equipment package
NOTES	Concourse Areas: Concourse, Public Restrooms, Concessions, Spectator Services

HKS INTERIOR FINISHES

FINISH LEVEL – 03 [Back of House]	
LOCATIONS	Back-Of-House: Support Spaces
FLOORING	Sealed Concrete Carpet Tile or Vinyl Composite Tile at habitable Support Spaces
WALLS	Painted Gyp, Painted CMU Block Walls
WALL BASE	Vinyl Base
DOORS/FRAMES	Painted Hollow Metal Doors and Frames
CEILING	Exposed Structure Minimal Gypsum Soffits and Acoustical Ceiling Tile
CASEWORK	Plastic Laminate Cabinets
COUNTERS	Plastic Laminate Countertops
NOTES	Back-Of-House: Support Spaces

FINISH LEVEL – 04 [Team Spaces]	
LOCATIONS	Team Spaces: Locker Rooms, Training, Team Lounge/Meeting Spaces/ Team Showers
FLOORING	Carpet tile, rubber tile, porcelain tile Porcelain Tile at Wet Areas (Showers, Restrooms)
WALLS	Painted Gyp Ceramic Tile at Wet Areas
WALL BASE	Wood Base
DOORS/FRAMES	Wood Door w/ Painted Hollow-Metal Frame
CEILING	Gypsum and/or ACT Soffits + Clouds
CASEWORK	Wood Veneer Cabinets and lockers
COUNTERS	Solid Surface / Quartz Countertops
NOTES	Team Spaces: Locker Rooms, Training, Team Lounge/Meeting Spaces/ Team Showers

HKS INTERIOR FINISHES


FINISH LEVEL – 05 [Premium - Club Spaces, Club Restrooms, Premium Corridor]			
LOCATIONS	C Premium – Low (50% of Premium Space)	B Premium – Medium (40% of Premium Space)	A Premium – High (10% of Premium Space)
FLOORING	Polished Concrete Carpet Tile as accent to define areas within spaces	Porcelain Tile Carpet tile as accent to define areas within spaces	Porcelain Tile
WALLS	Painted Gyp Minimal Wood Panel Accents at Communal Premium Spaces (< 5%) Porcelain Tile at Wet Areas (Restrooms, Bars)	Painted Gyp Ceramic Tile at Wet Areas and Accent Walls Wood Panel Accents (< 15%)	Painted Gyp Wood Panel Accents at Communal Premium Spaces (< 30%) Porcelain/ Ceramic Tile at Wet Areas (Restrooms, Bars)
WALL BASE	Wood Base Porcelain Tile	Wood Base Porcelain Tile	Wood Base Porcelain Tile
DOORS/FRAMES	Wood Door w/ Painted Hollow-Metal Frame Glass doors at club entries	Wood Door w/ Painted Hollow-Metal Frame Glass doors at club entries	Wood Door w/ Painted Hollow-Metal Frame Glass doors at club entries
CEILING	Exposed to Structure, paint all elements of the ceiling including structure, MEP, etc. < 30% Gypsum or ACT Soffits/Clouds	Gypsum and/or ACT Soffits/Clouds Wood Panel Accents (< 20%)	Gypsum and/or ACT Soffits/Clouds Wood Panel Accents (< 30%)
CASEWORK	Wood Veneer Cabinets	Wood Veneer Cabinets	Wood Veneer Cabinets
COUNTERS	Solid Surface / Quartz Countertops	Natural Stone Countertops	Natural Stone Countertops
NOTES			

HKS INTERIOR FINISHES

FINISH LEVEL – 06 [Suites]	
LOCATIONS	Suites: Suites + Suite Specific Support Spaces
FLOORING	Porcelain Tile
WALLS	50% Painted Gyp. 50% Wallcovering Wood Panel Accents at Communal Premium Spaces (< 25%) Porcelain/ Ceramic Tile at Wet Areas (Restrooms, Bars)
WALL BASE	Wood Base
DOORS/FRAMES	Wood Door w/ Painted Hollow-Metal Frame Glass door at suite entry
CEILING	Gypsum and/or ACT Soffits/Clouds Wood Panel Accents (< 10%)
CASEWORK	Wood Veneer Cabinets
COUNTERS	Natural Stone Countertops
NOTES	


East / West Section 50 Yard Line

1. LOWER THE FIELD 4’
2. ADD FIELD SUITES (10)
3. RESTRIKE AND OVERBUILD 20 ROWS OF LOWER BOWL ADD 4 ROWS
4. REBUILD LOGE
5. DEMO AND RAISE CLUB LEVEL 8’

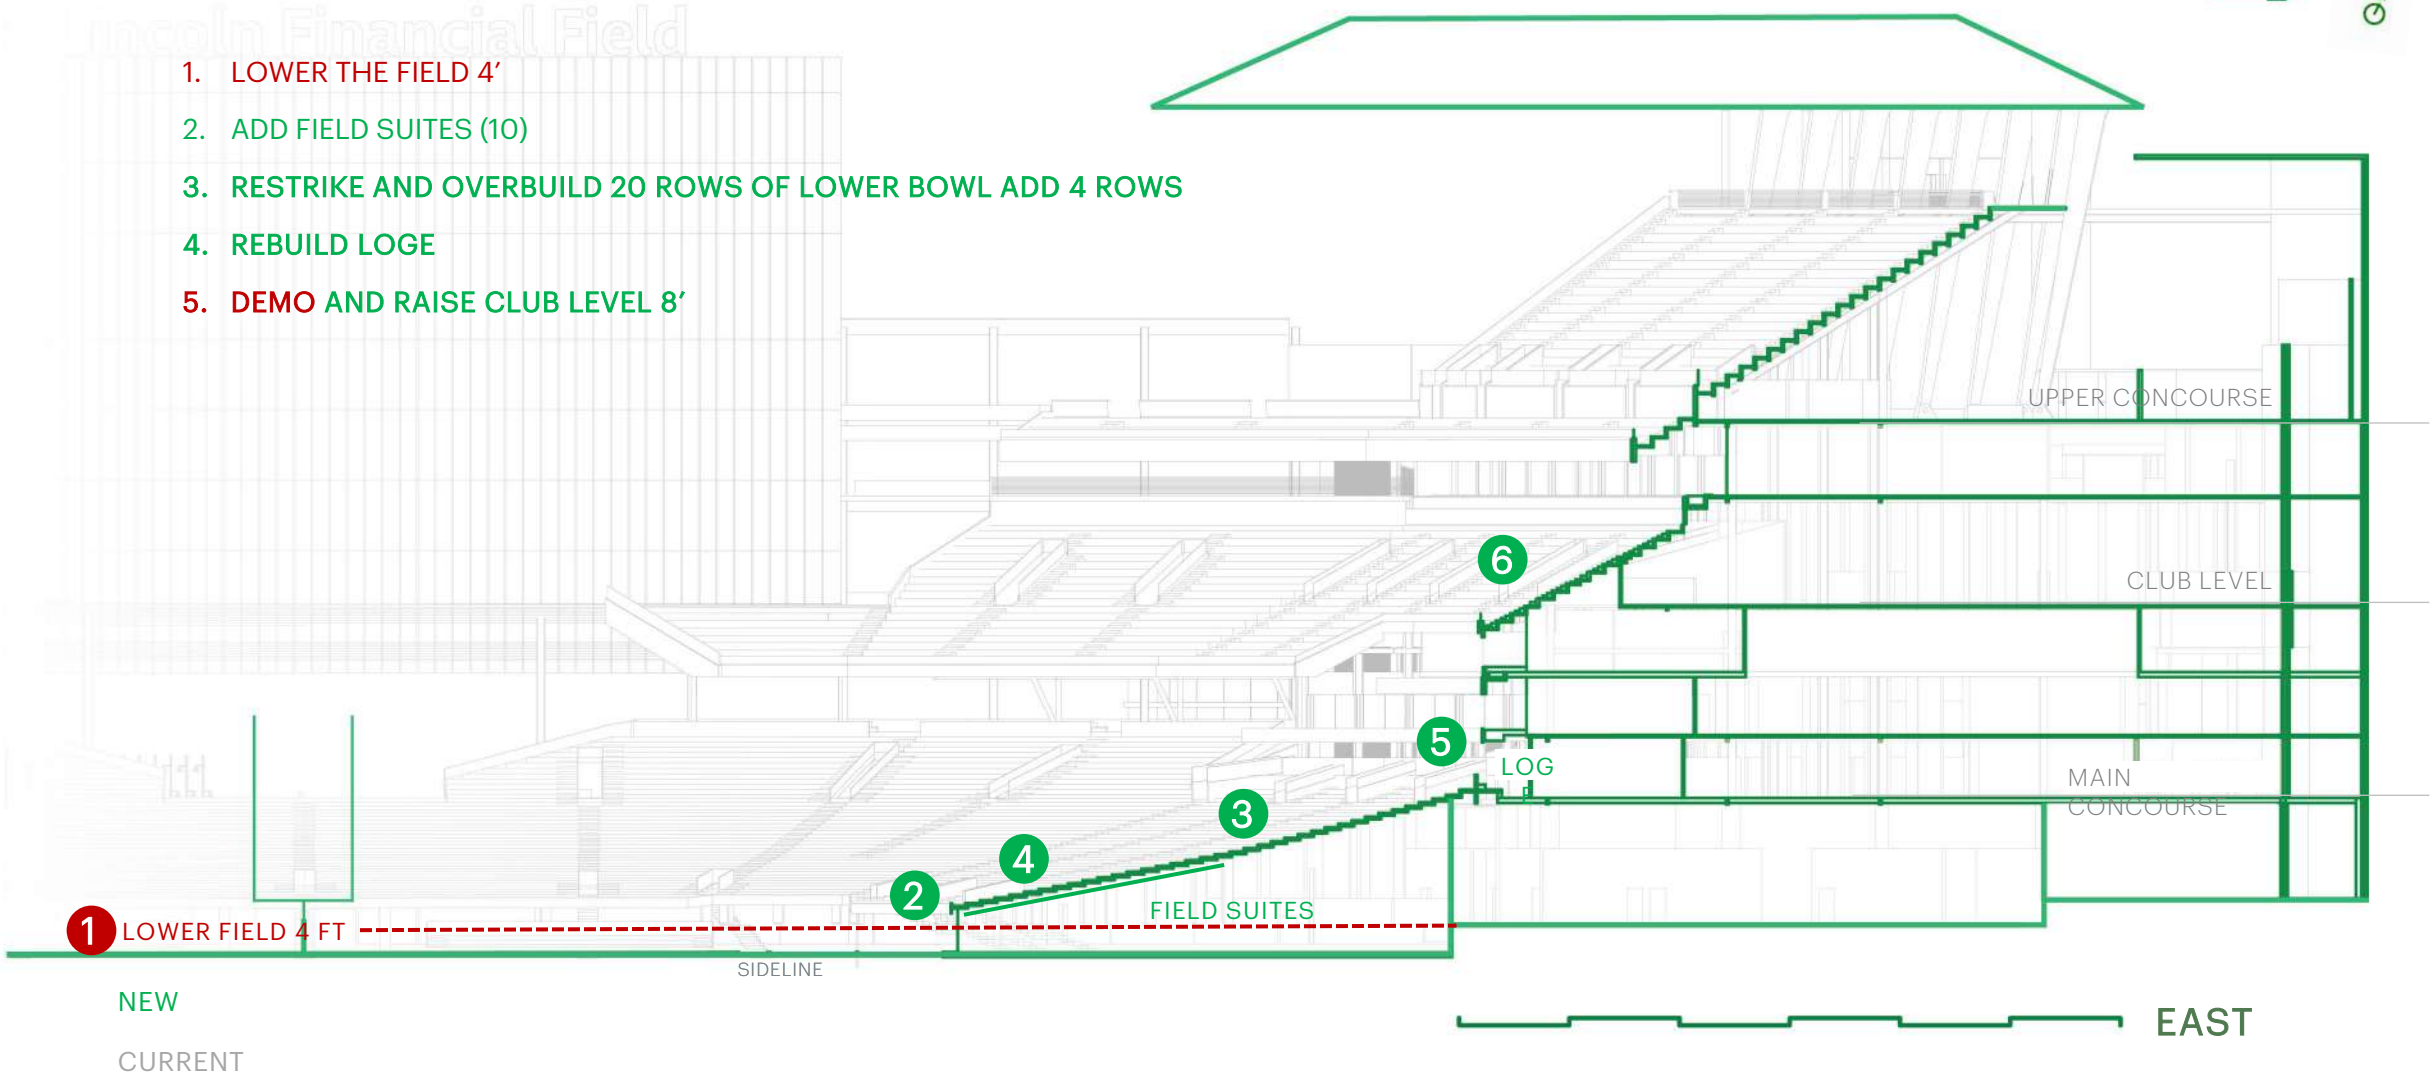


HKS

North Section



1. DEMO EXISTING NORTH BOWL ABOVE MAIN CONCOURSE
2. LOWER THE FIELD 4’
3. OVERBUILD LOWER BOWL 20 ROWS
4. SUPER VOM AT MAIN CONCOURSE
5. OCCUPIABLE VIDEO BOARD (REFER TO VIDEO TECHNOLOGY SECTION)

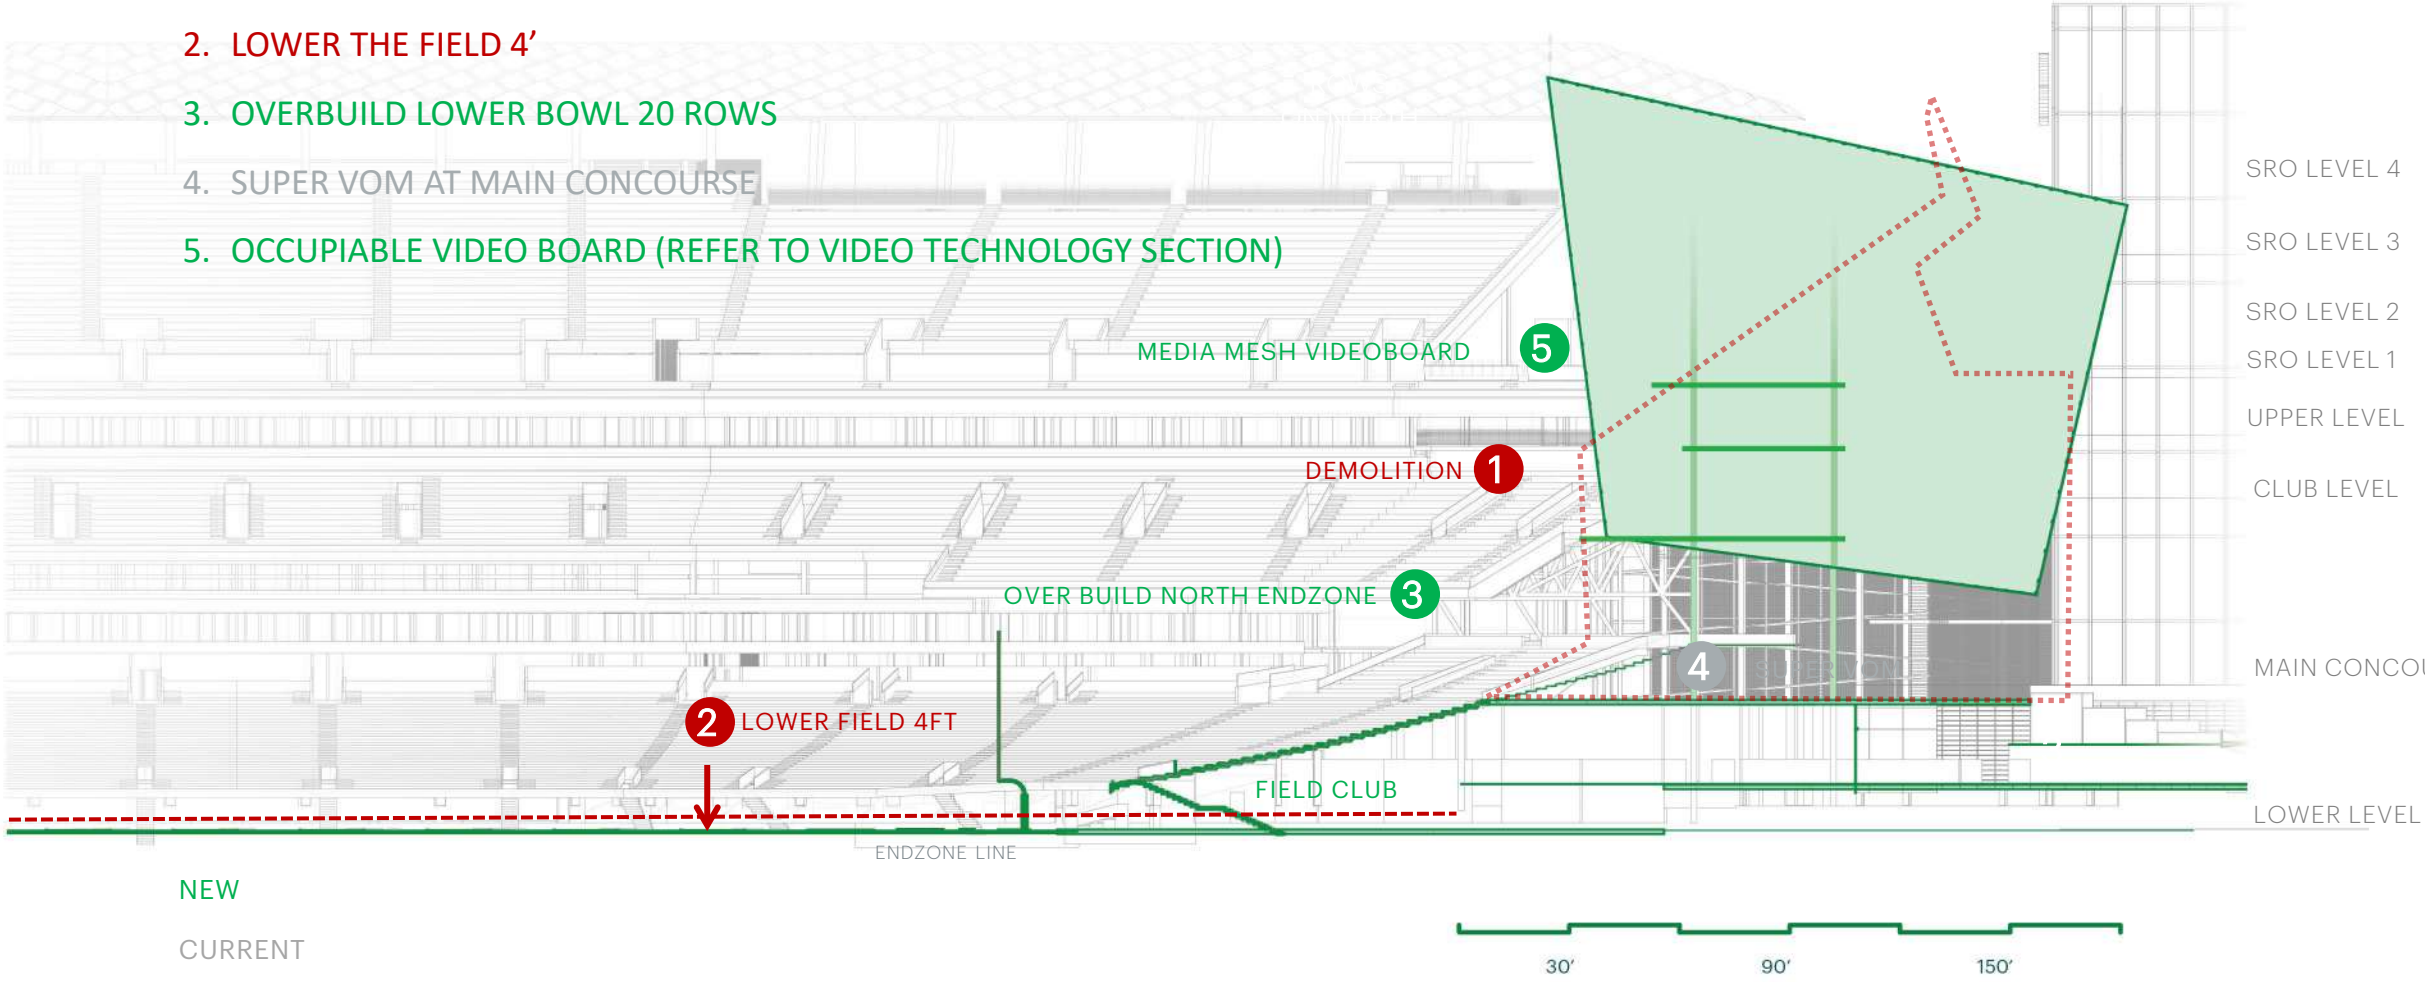


HKS

NORTH STAND


update

EXISTING

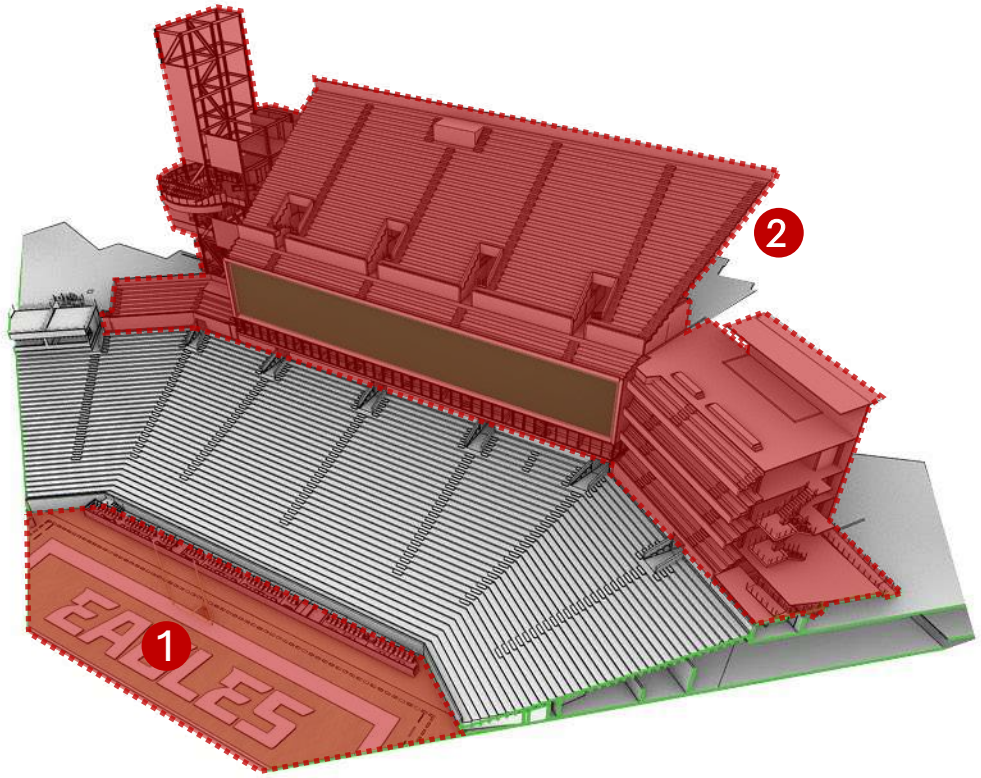

1. LOWER THE FIELD (4’)
2. DEMO EXISITNG NORTH BOWL ABOVE MAIN CONCOURSE


PROPOSED

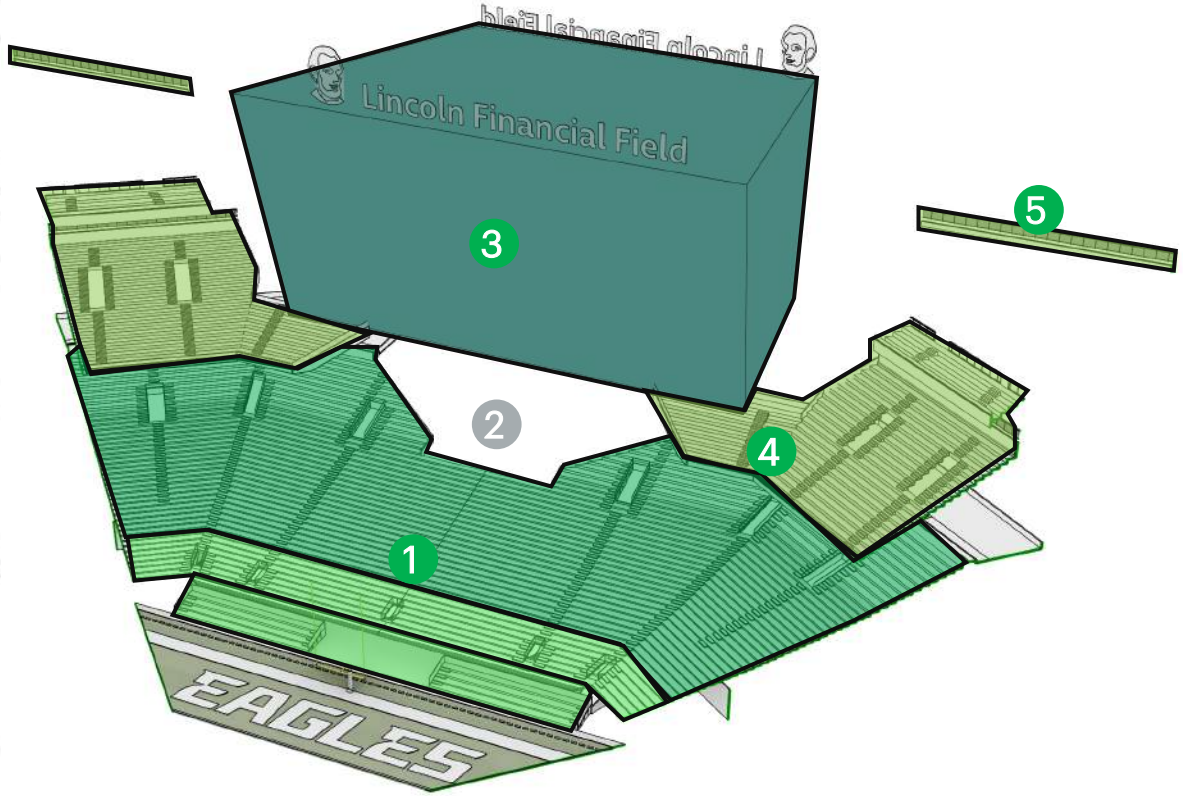

1. OVERBUILD LOWER BOWL 20 ROWS
2. SUPERVOM FOR VISIBILITY FROM CONCOURSE
3. OCCUPIABLE VIDEO BOARD (REFER TO VIDEO TECHNOLOGY)
4. NEW CLUB SWEEP
5. UPPER TERRACE SRO

South Section

1. LOWER THE FIELD 4’
2. DEMO CLUB SEATS (-6 ROWS @ 19,540SF)
3. OVERBUILD LOWER BOWL
4. ADD NEW PREMIUM FIELD SUITES
5. ADD 4 ROWS TO BACK OF LOWER BOWL
6. INCREASE SIZE AND MOVE VIDEO BOARD TO THE BACK OF BOWL (REFER TO VIDEO TECHNOLOGY SECTION)

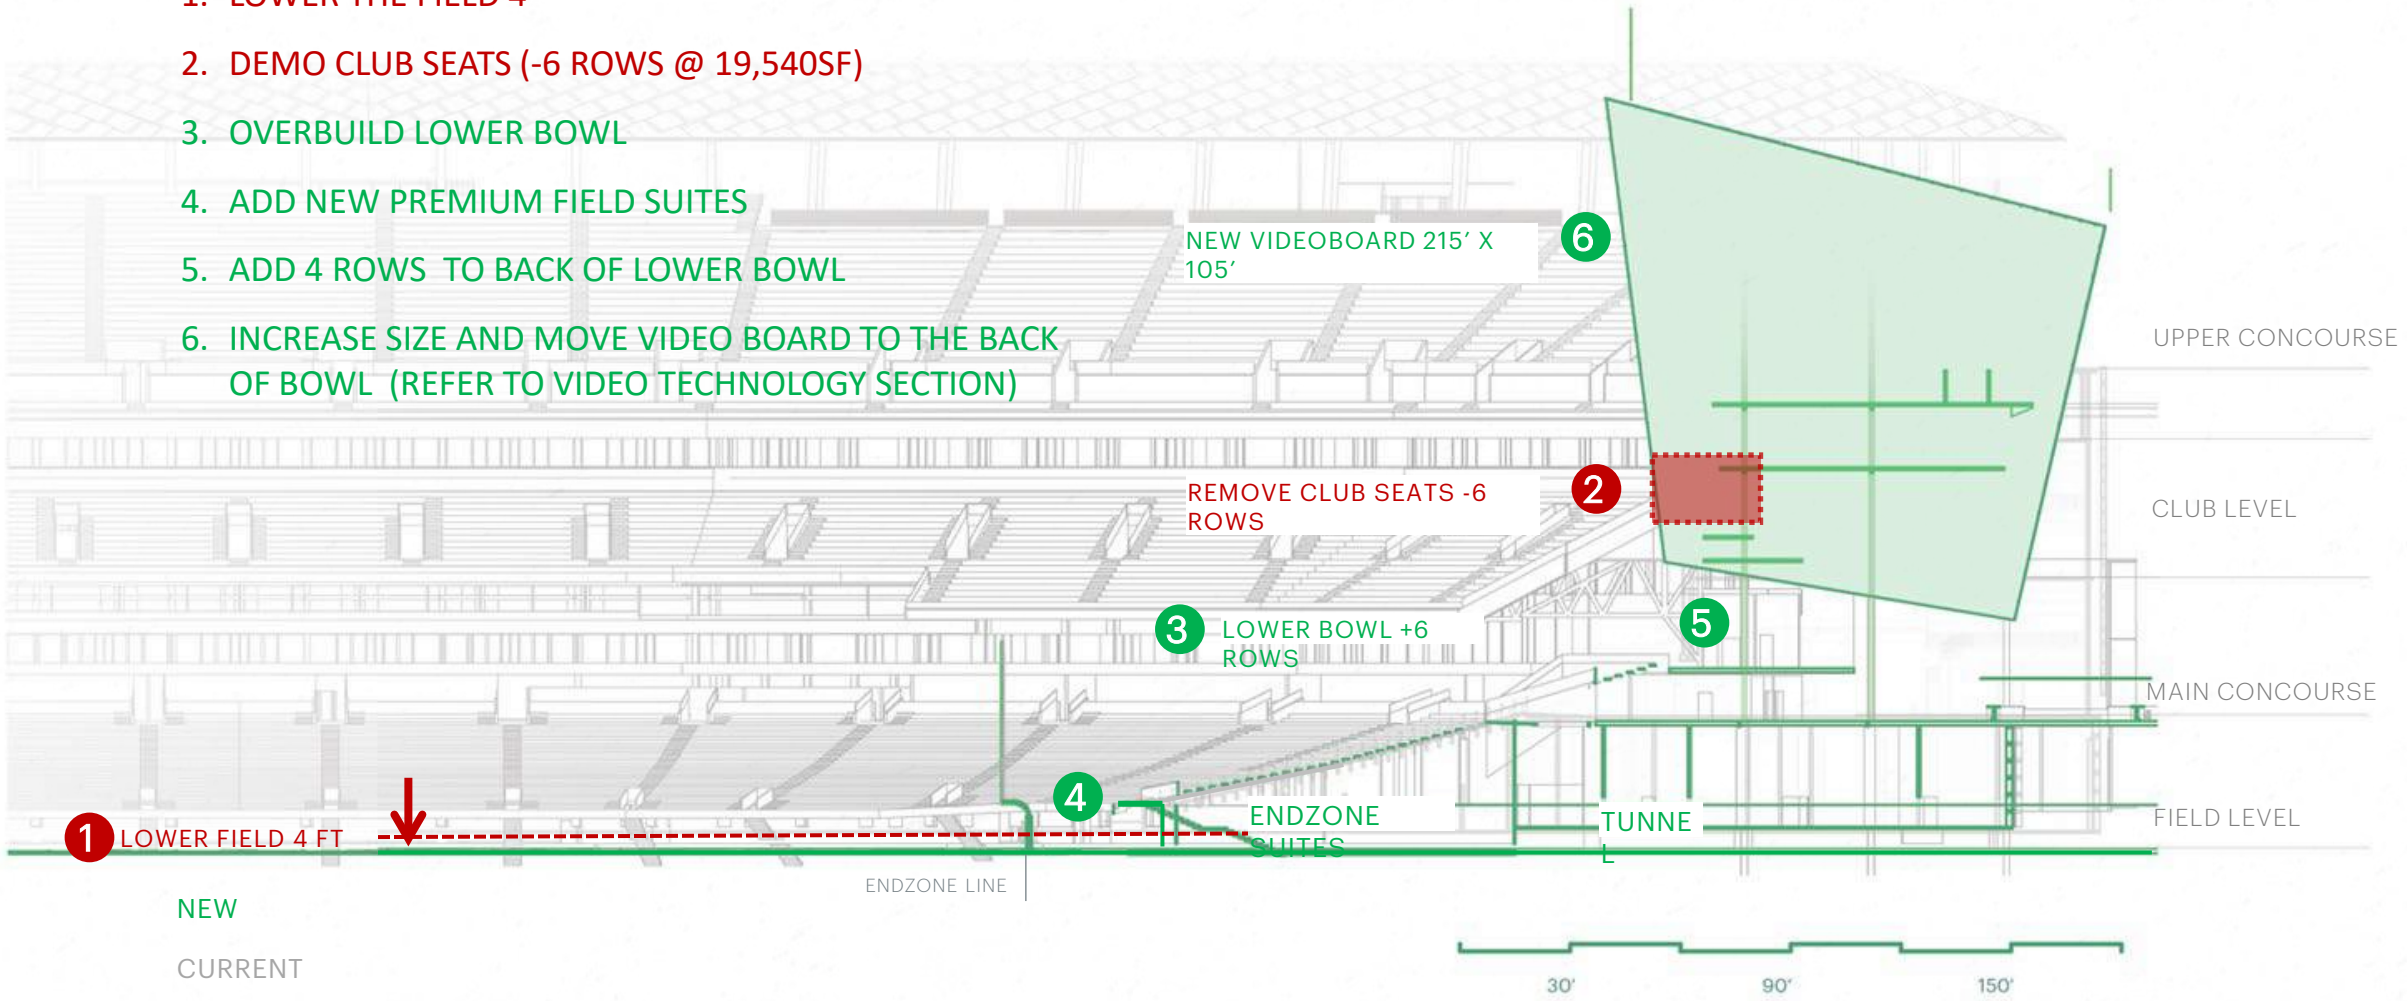


HKS

SOUTH STAND


update

EXISTING

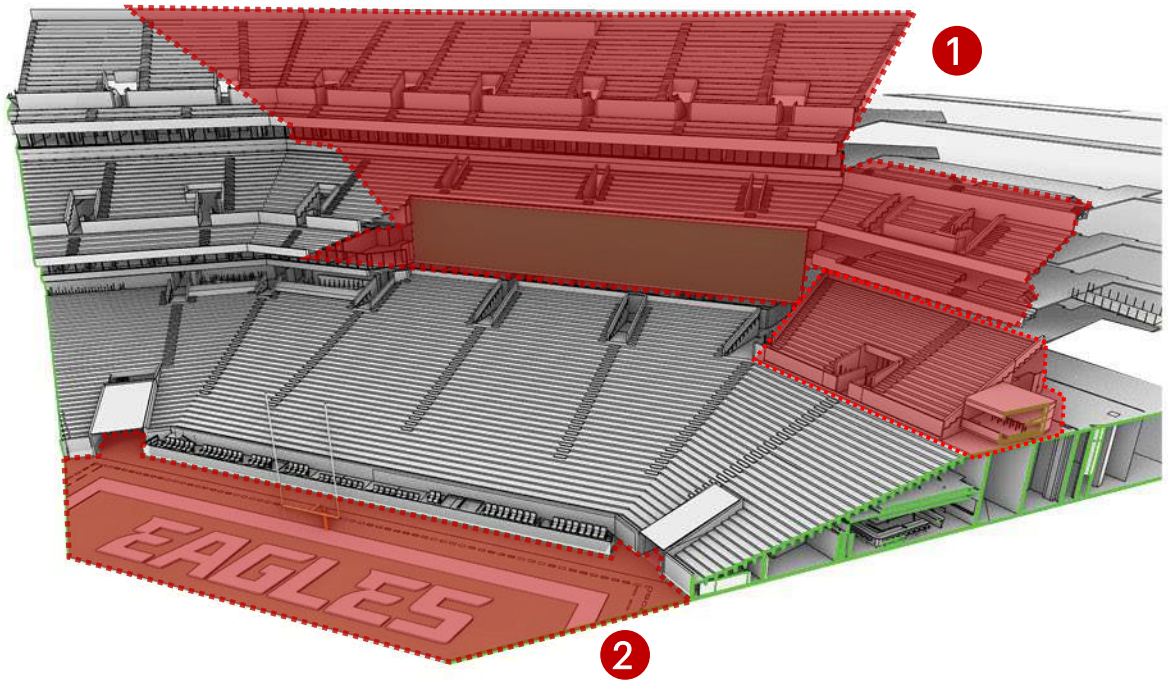


1. DEMOLITION
2. LOWER THE FIELD 4’

PROPOSED

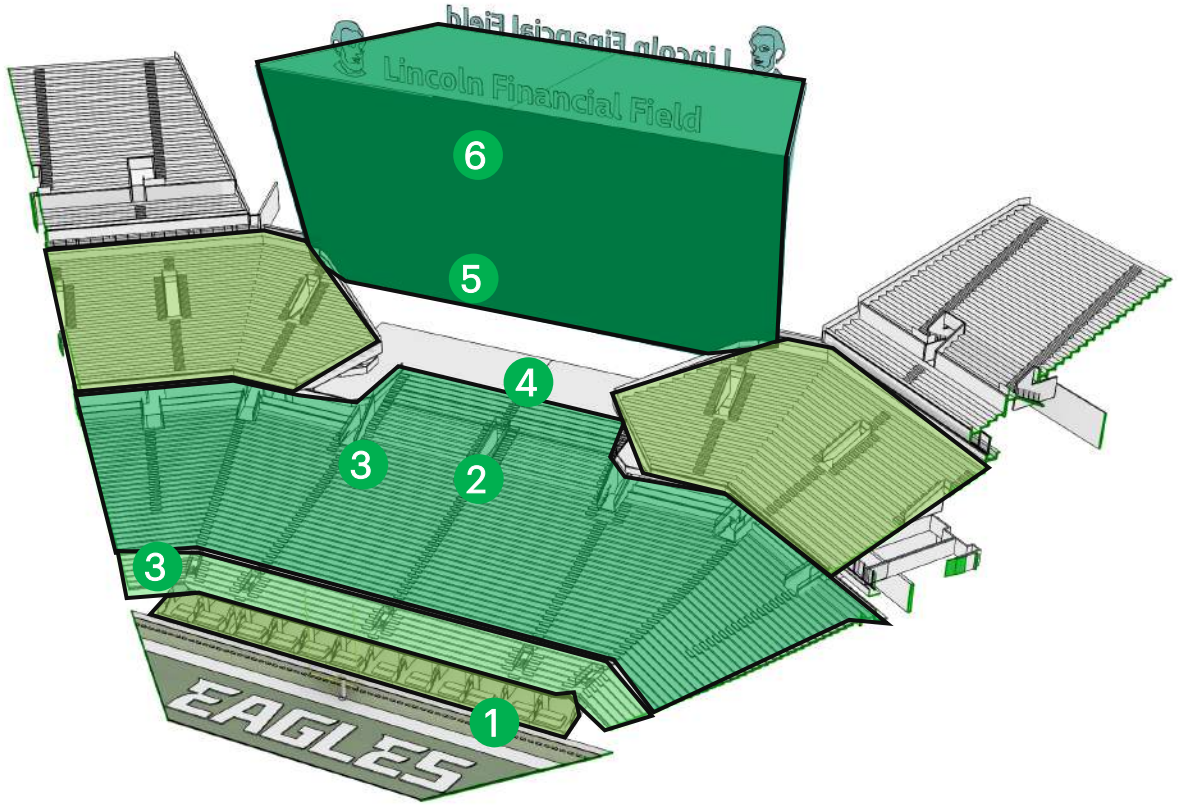


1. LOWER THE FIELD 4’
2. OVERBUILD HALF OF LOWER BOWL (22,600 SF)
3. NEW PREMIUM PRODUCTS ON SOUTH - 9 ENDZONE SUITES + BUNKER SUITES
4. ADDING NEW ROWS ON THE BACK
5. MOVING SCREEN TO THE BACK
6. INCREASING SIZE OF VIDEOBOARD - ASPECT RATIO 16:9 (215’ x 112.5’)

SOUTH ENDZONE VIEW

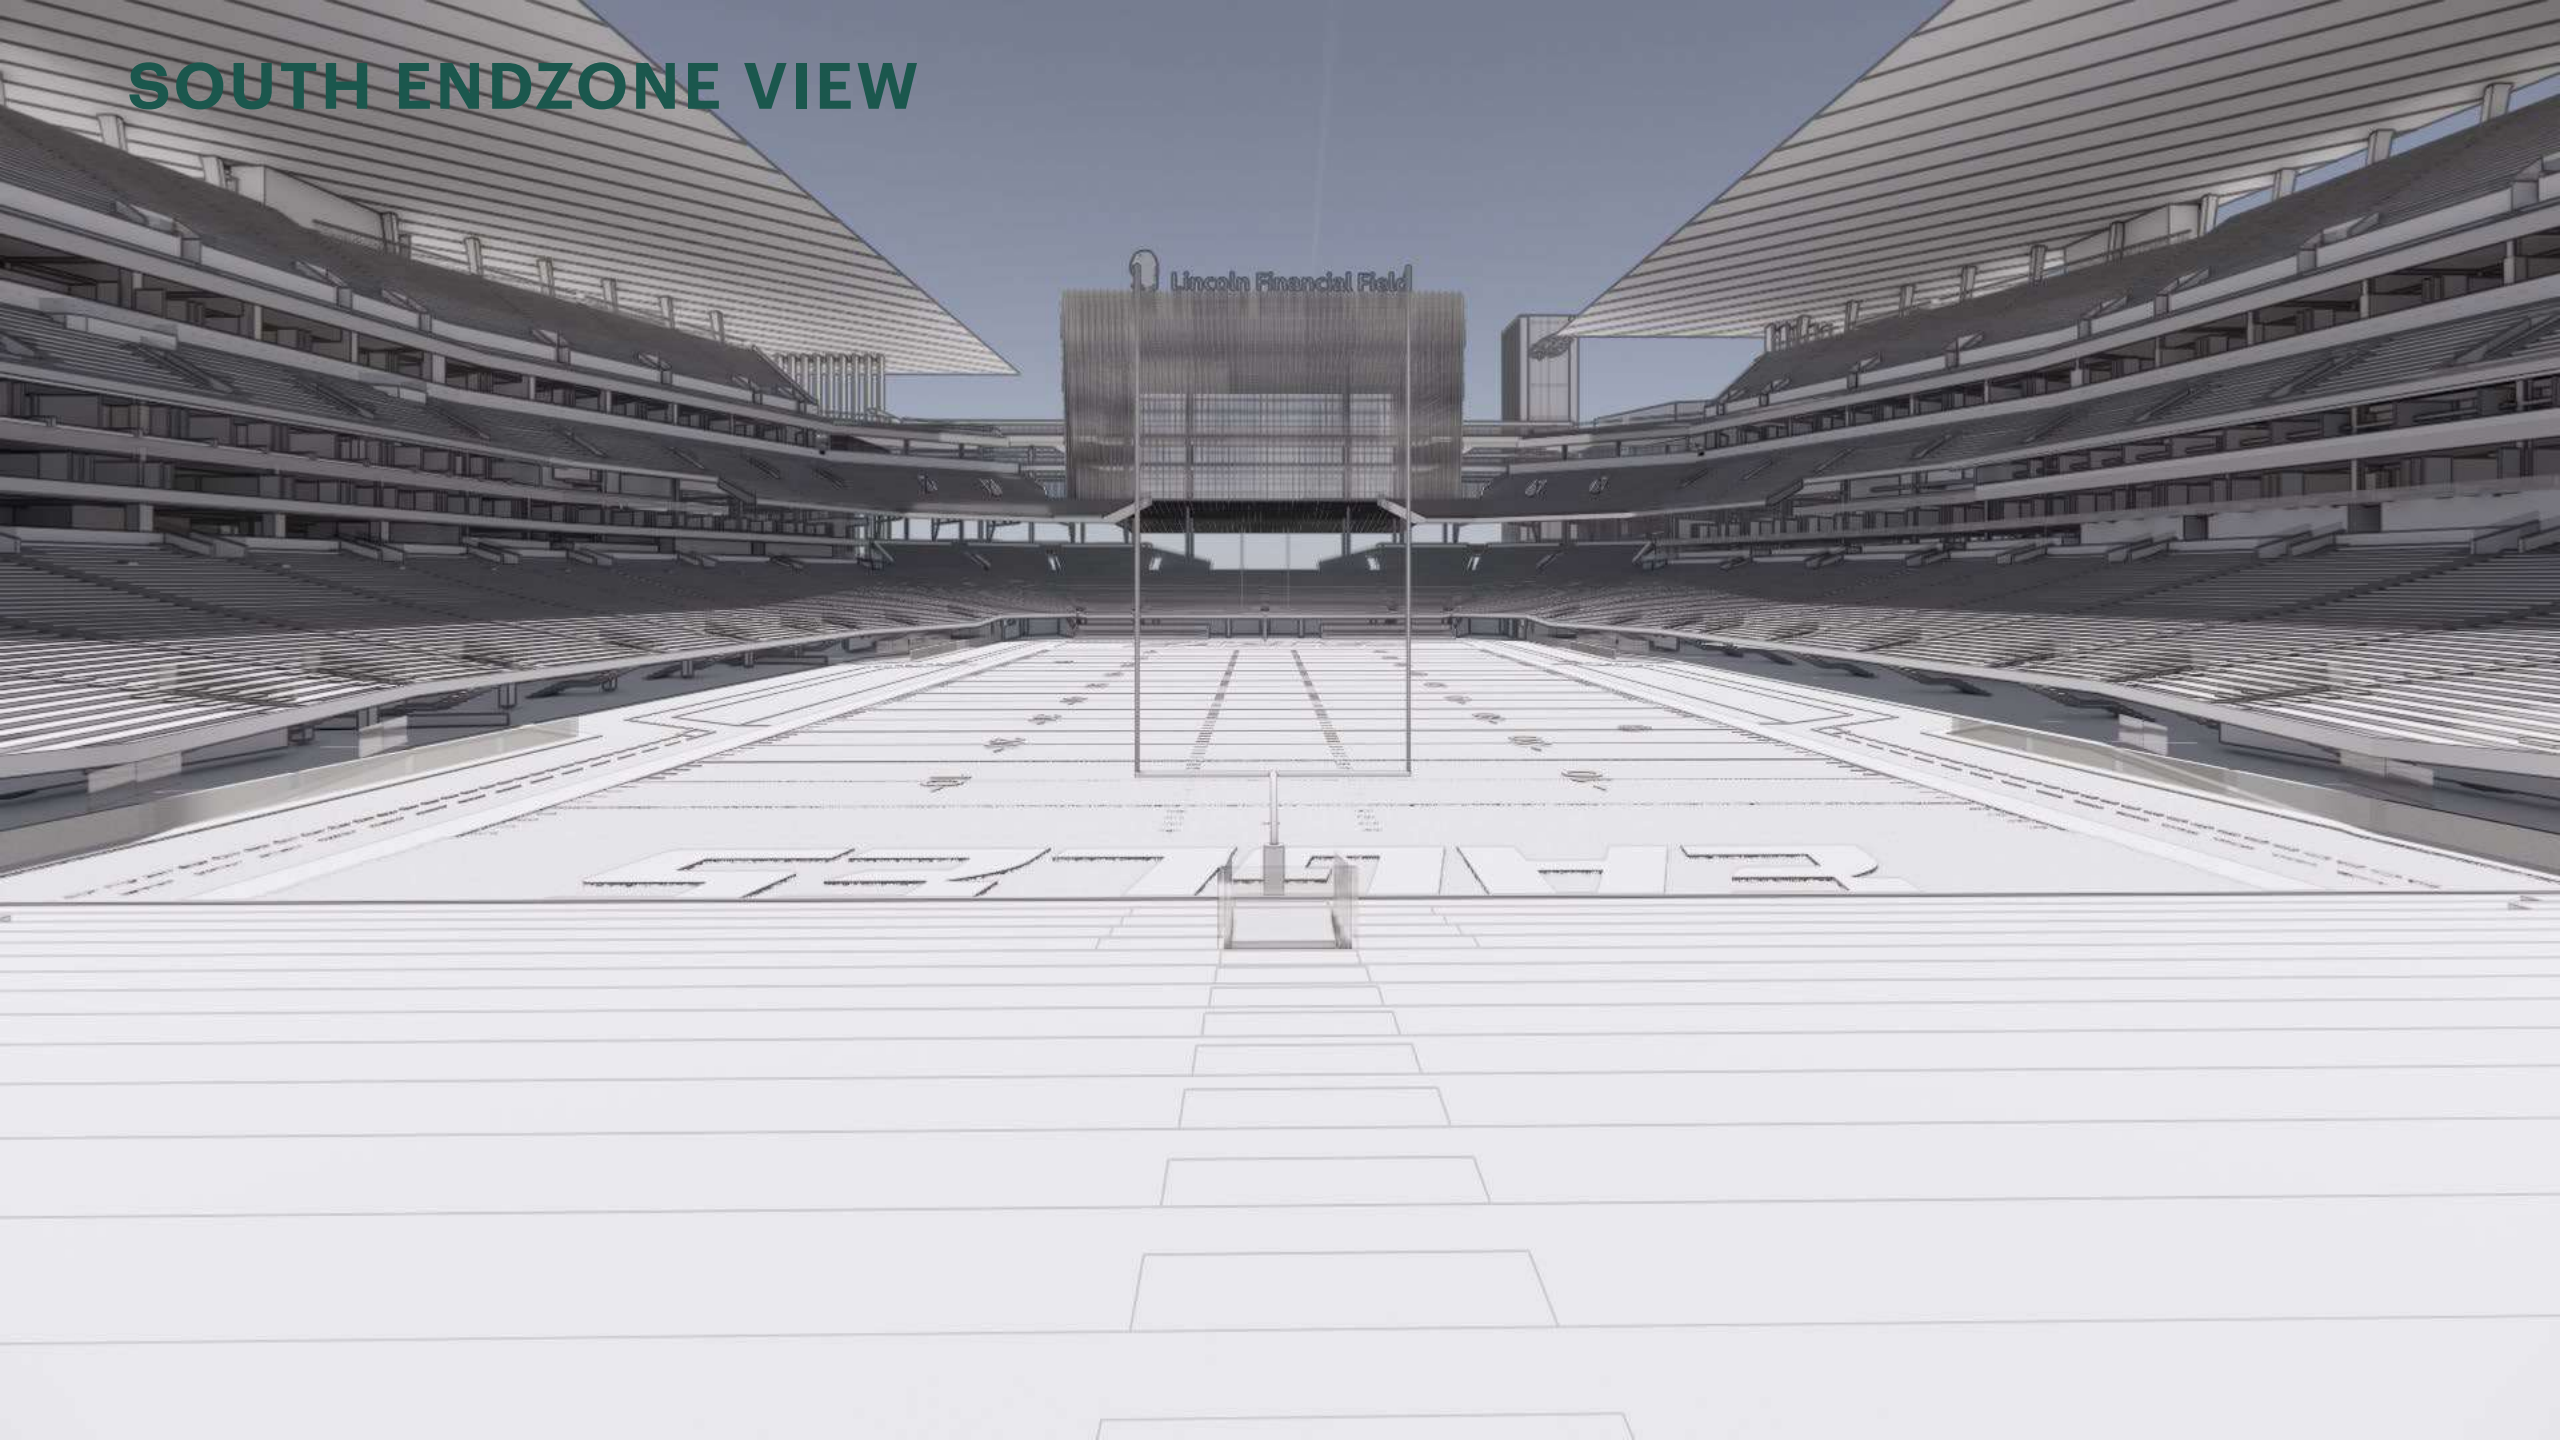


NORTHWEST LOWER BOWL VIEW

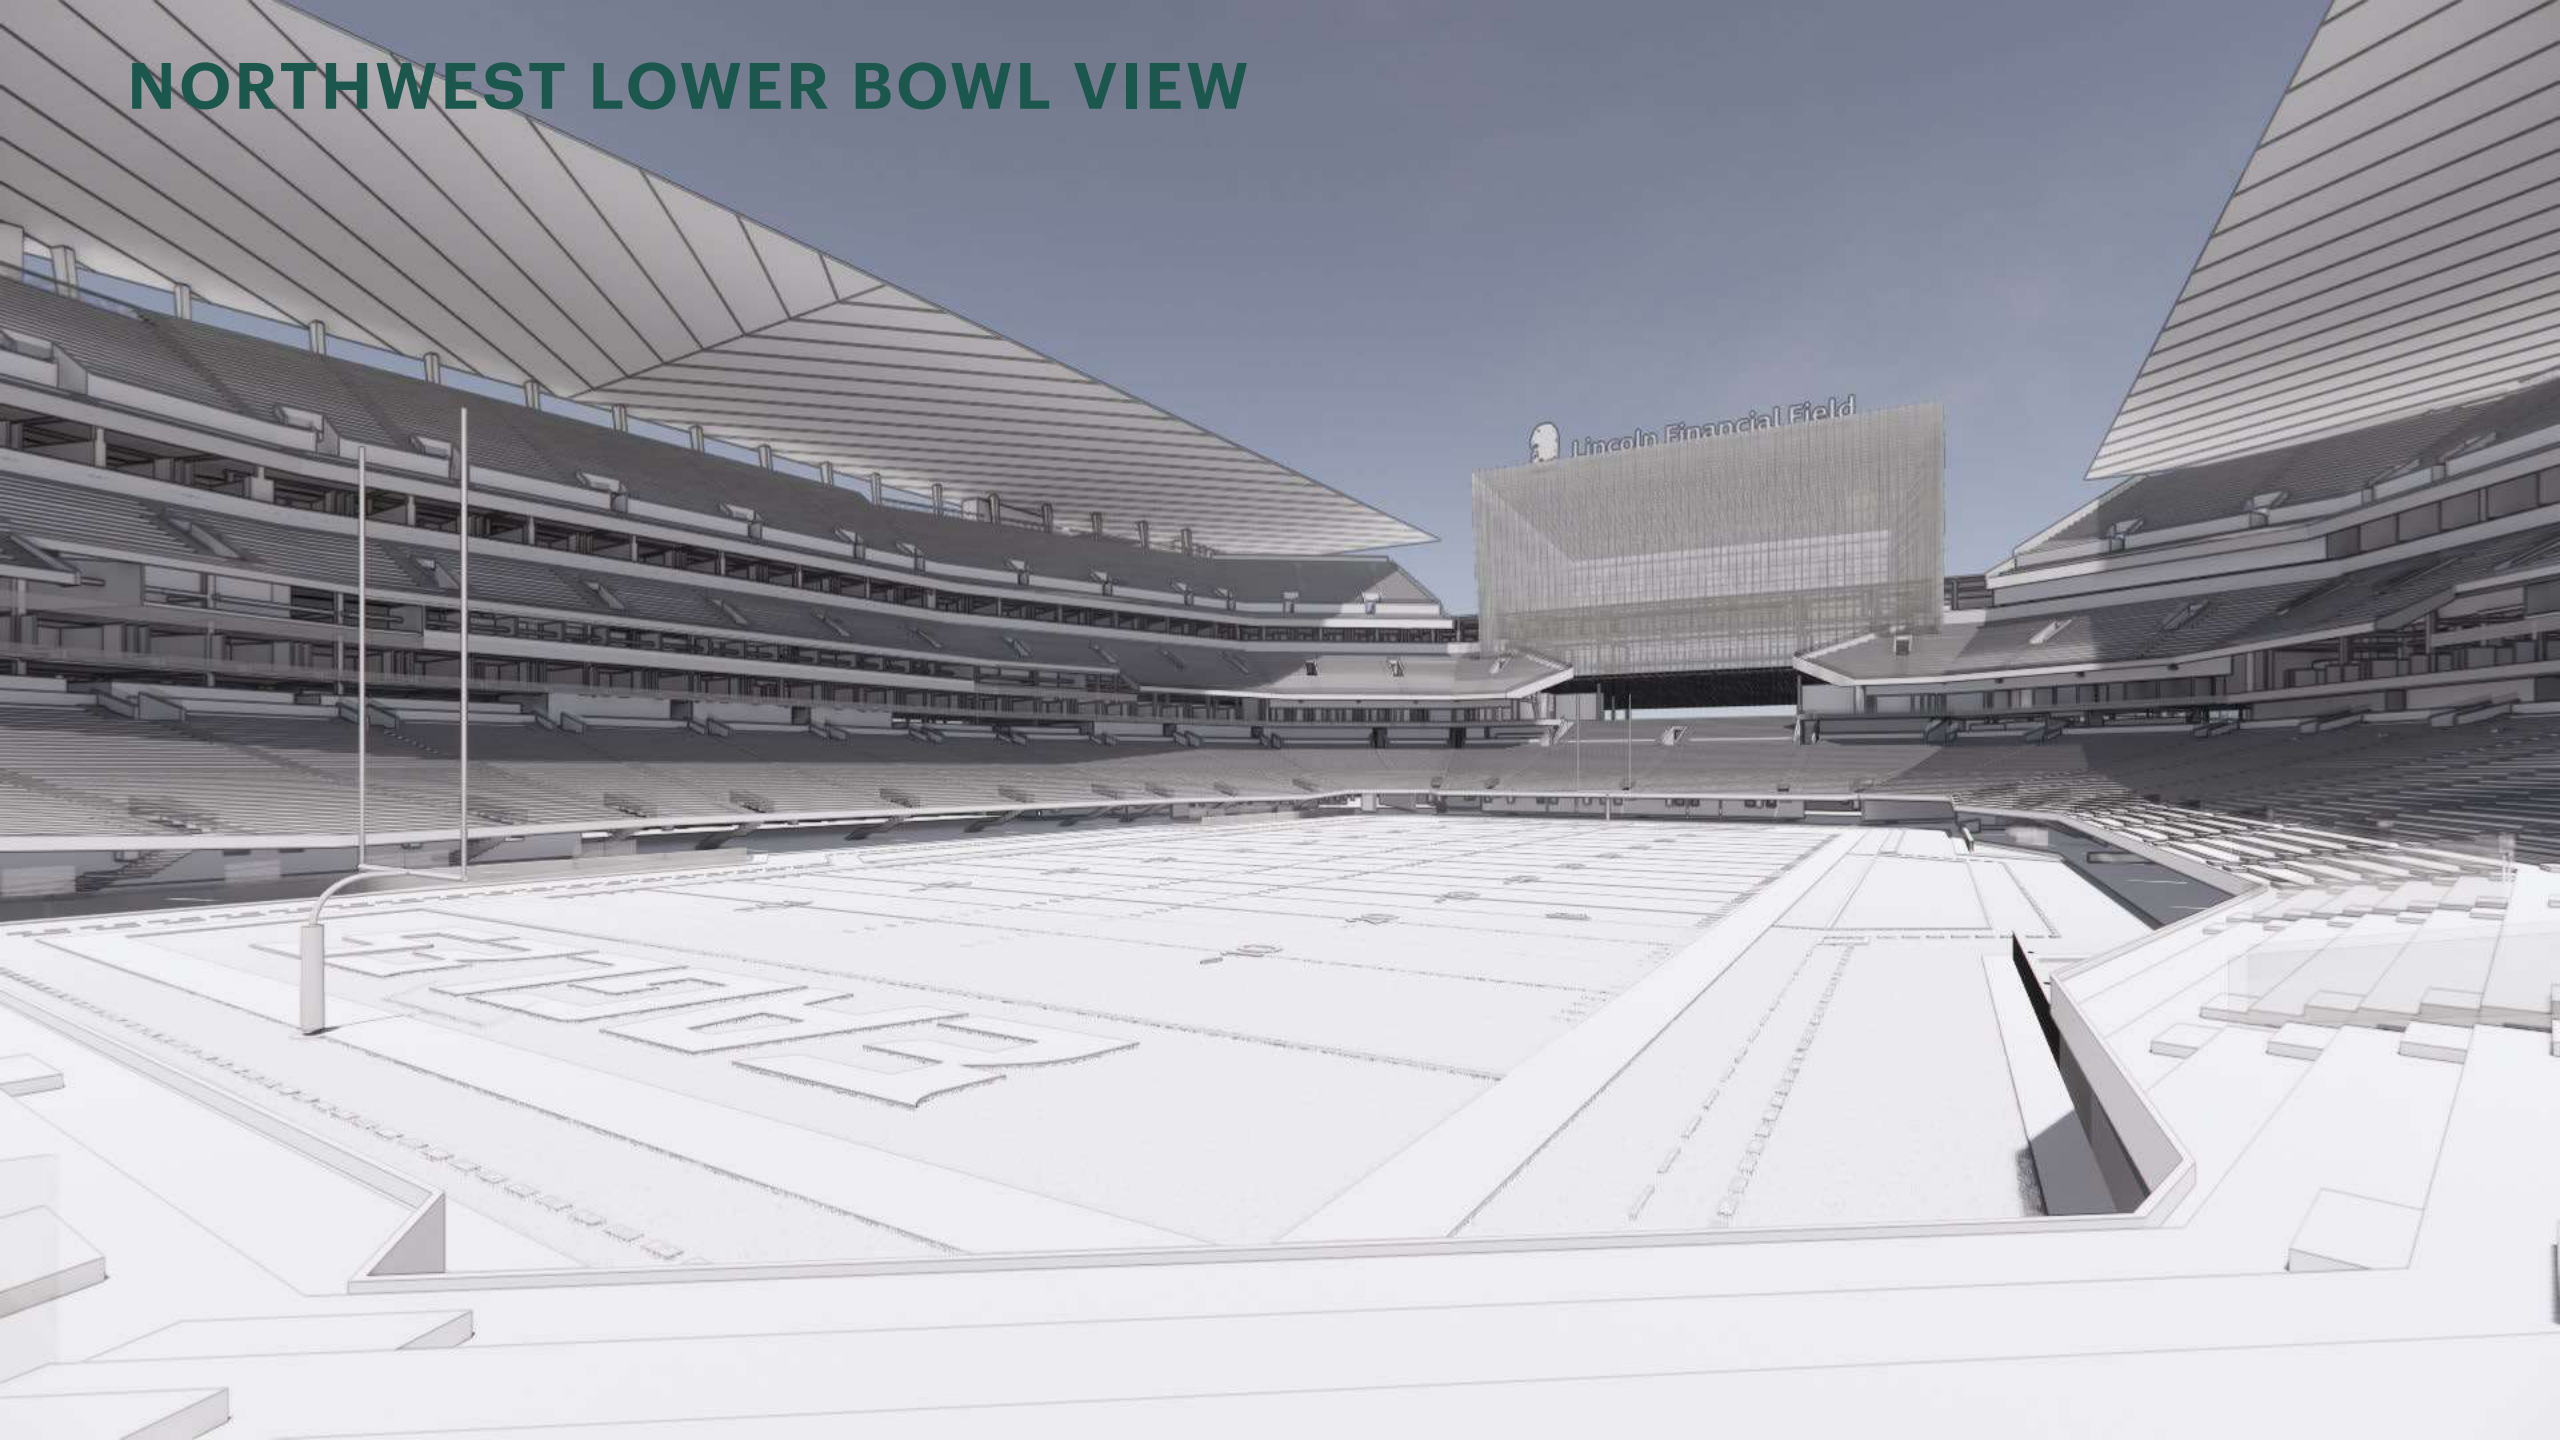


SOUTH WEST LOWER BOWL 50 YD VIEW



SOUTH ENDZONE VIEW

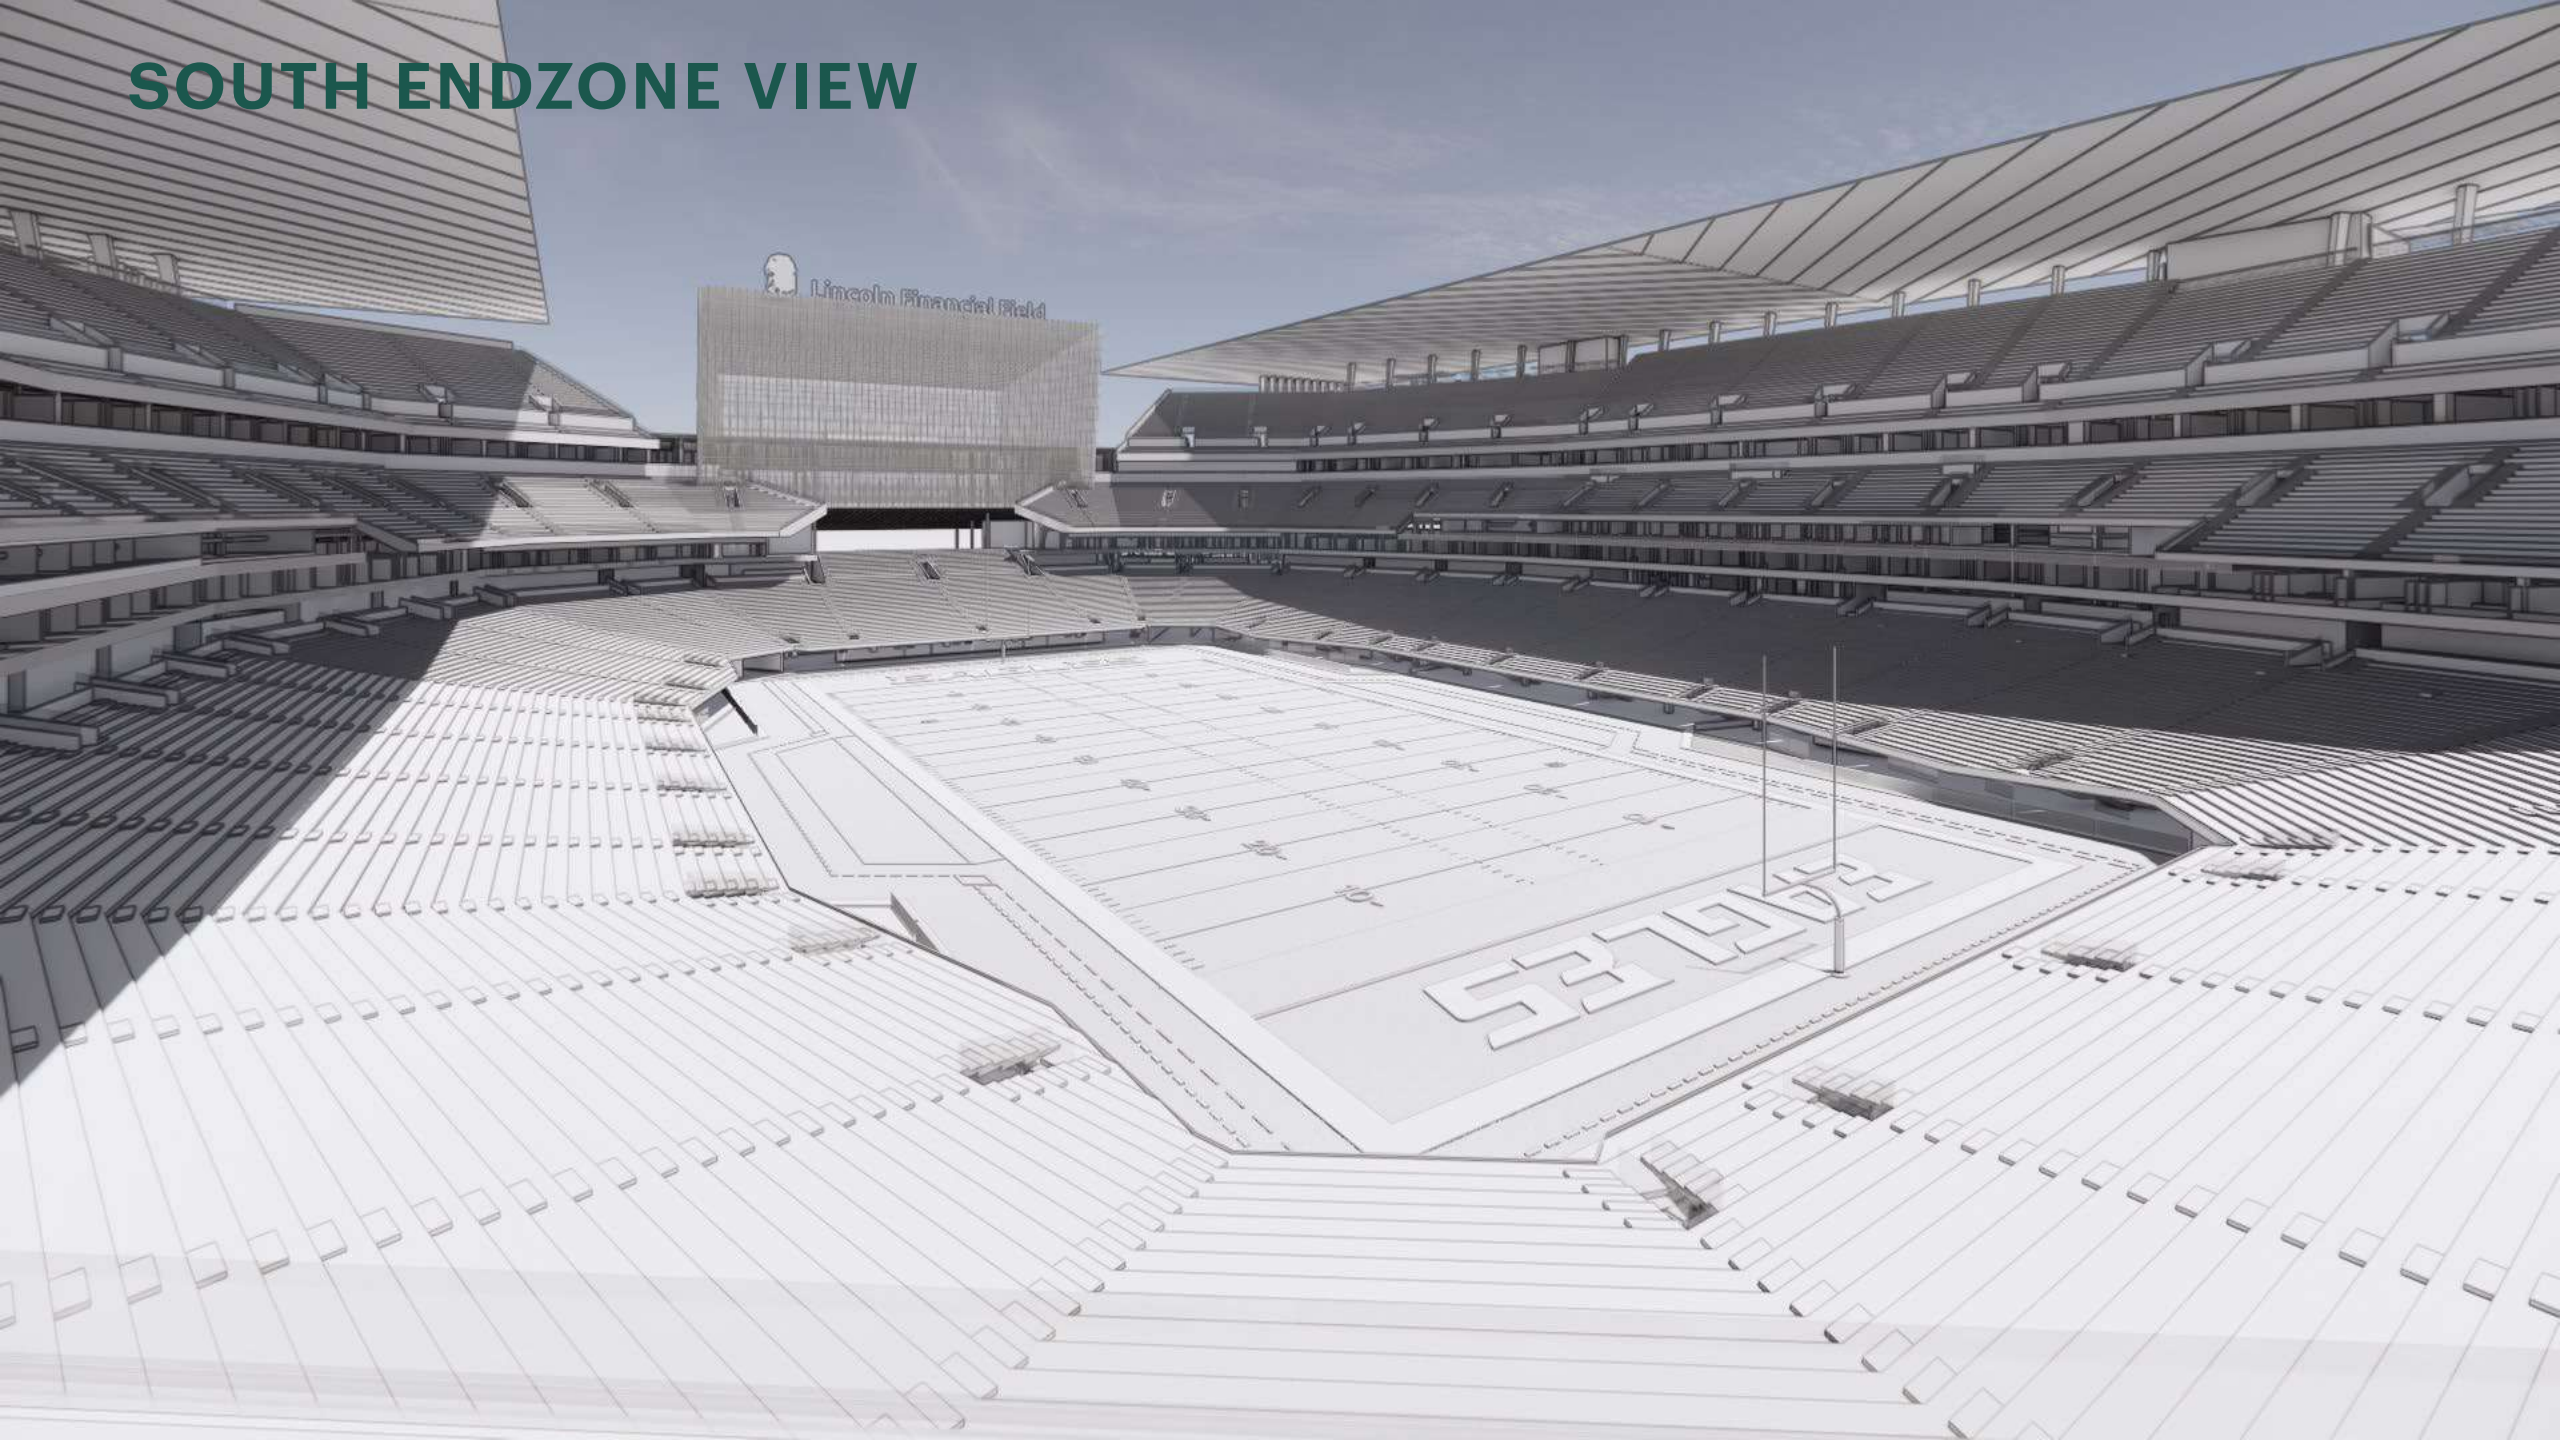

SOUTH UPPERBOWL VIEW

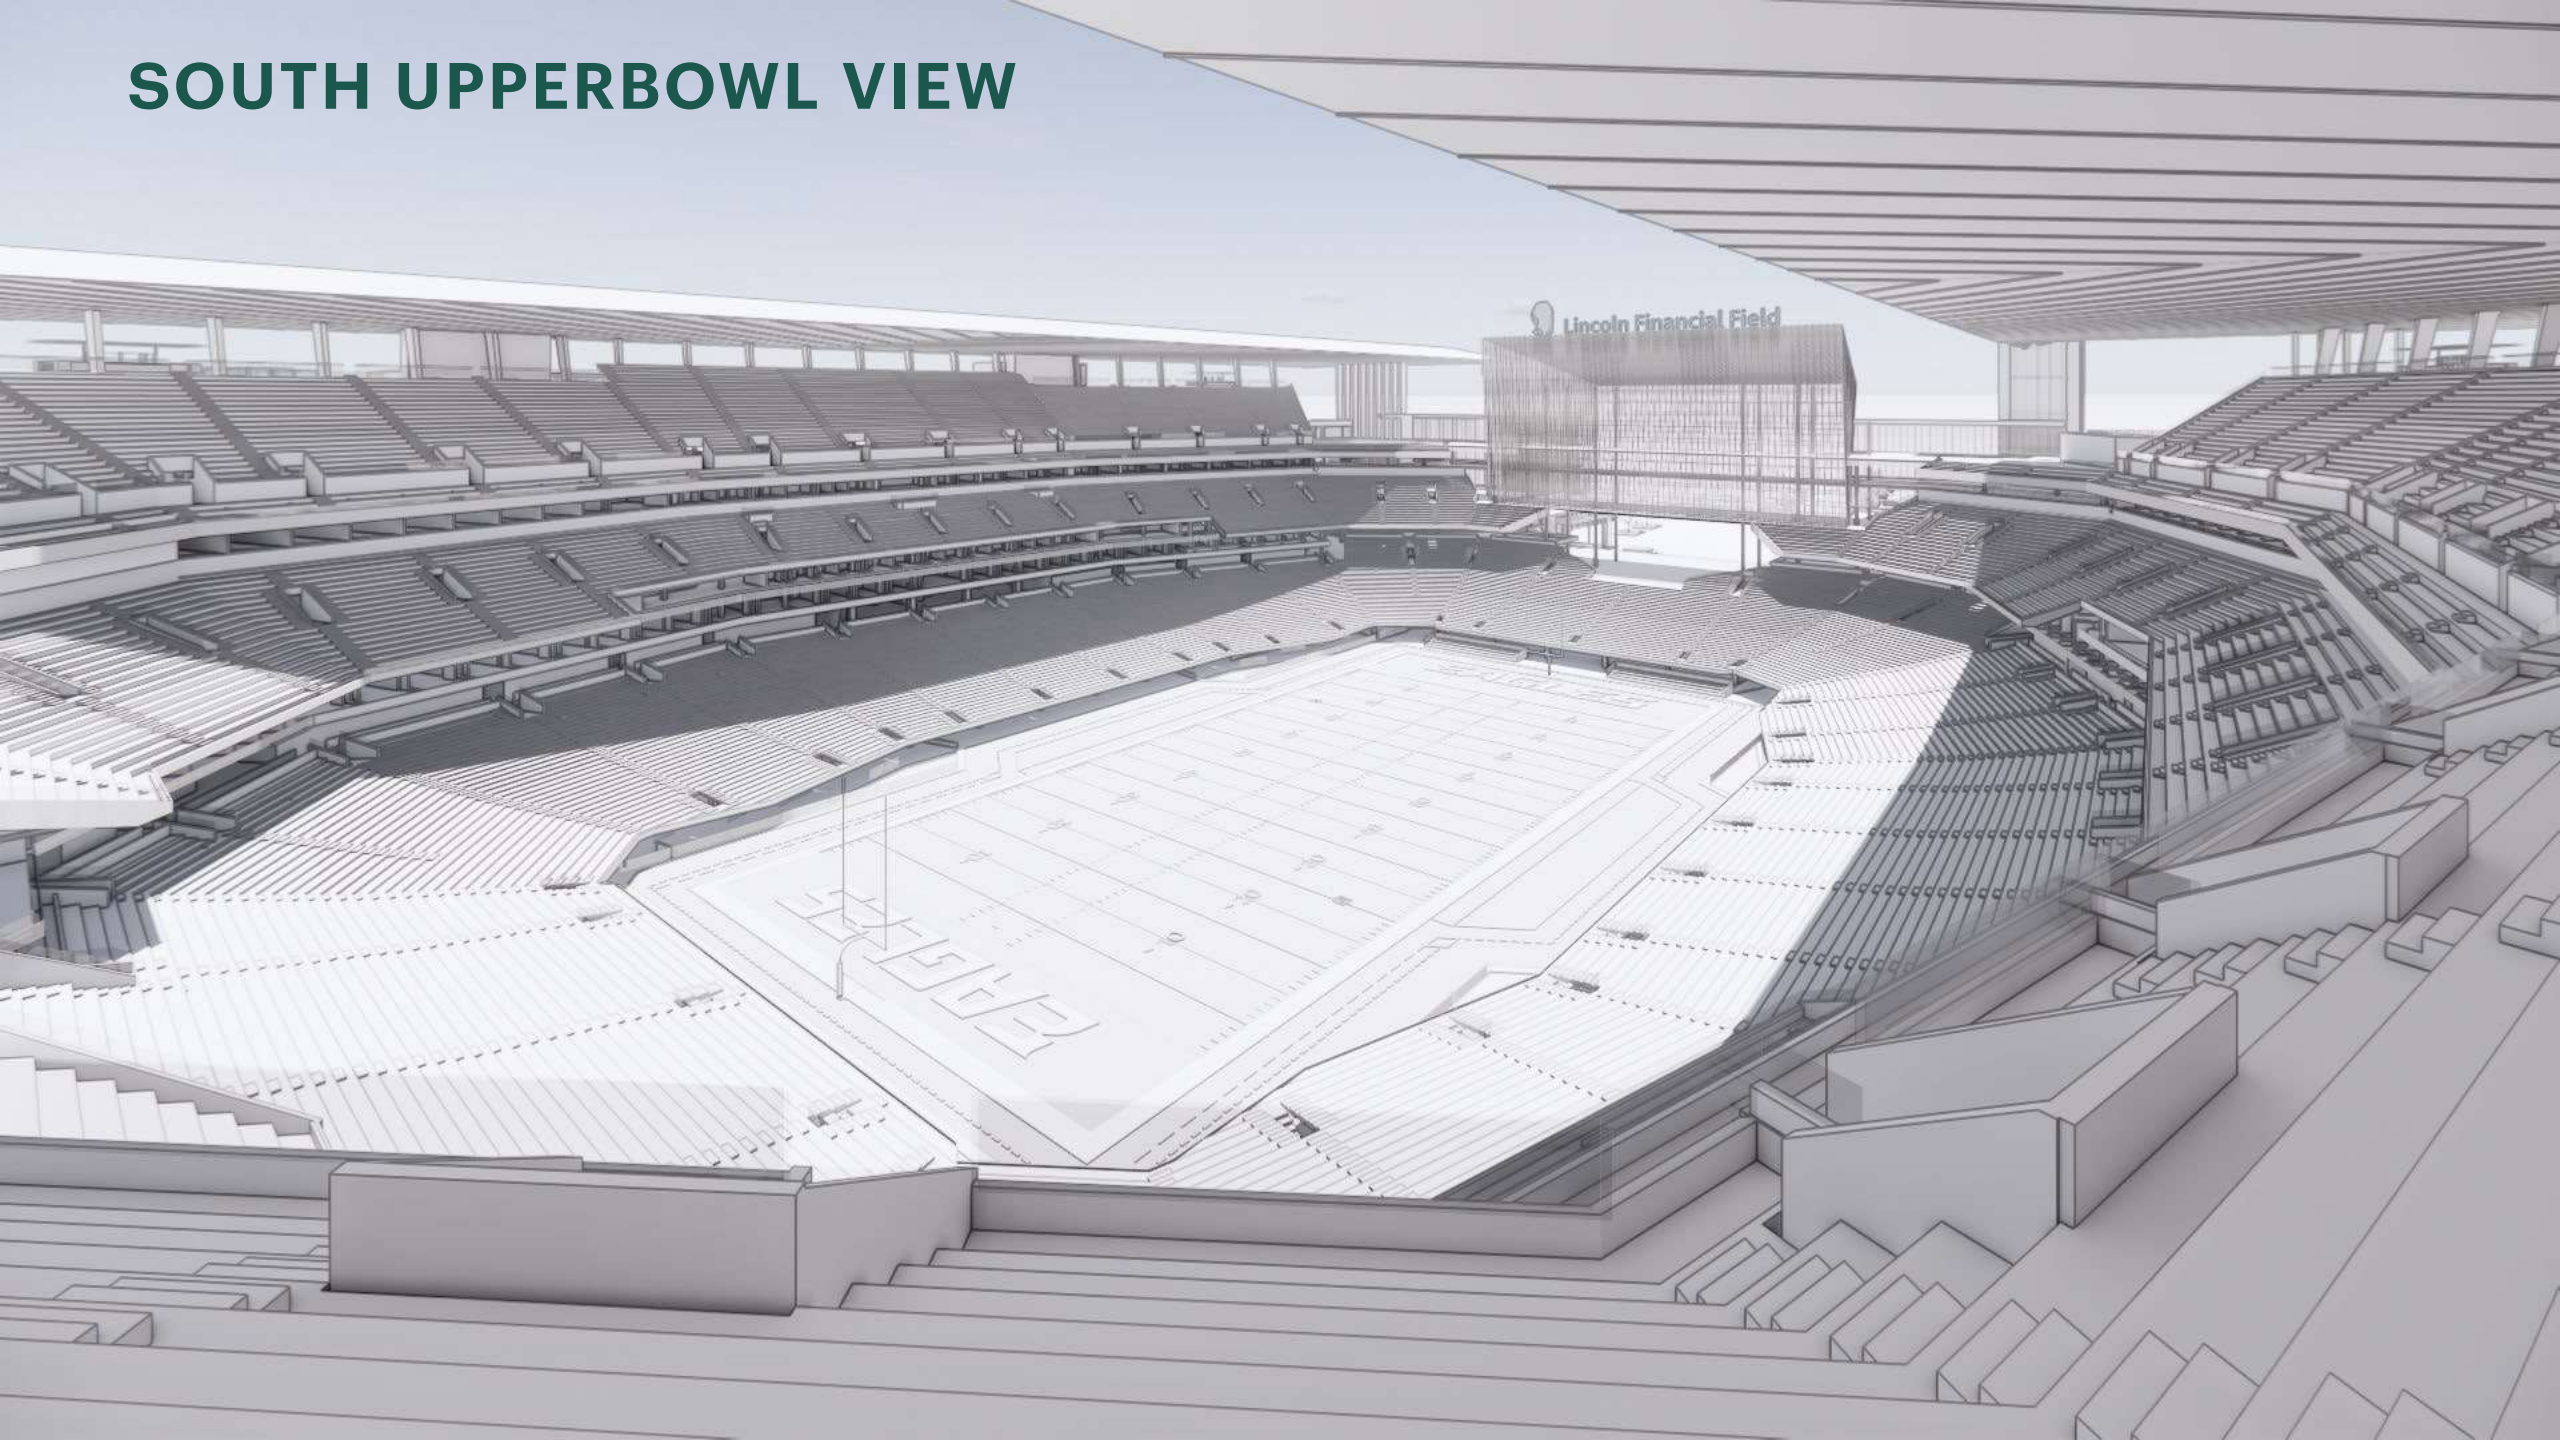




ALTERNATE BOWLS

LOWER BOWL FIELD HEIGHTS

FIELD AT GRADE




NEW 20,266 SF
OVERBUILD 141,882 SF

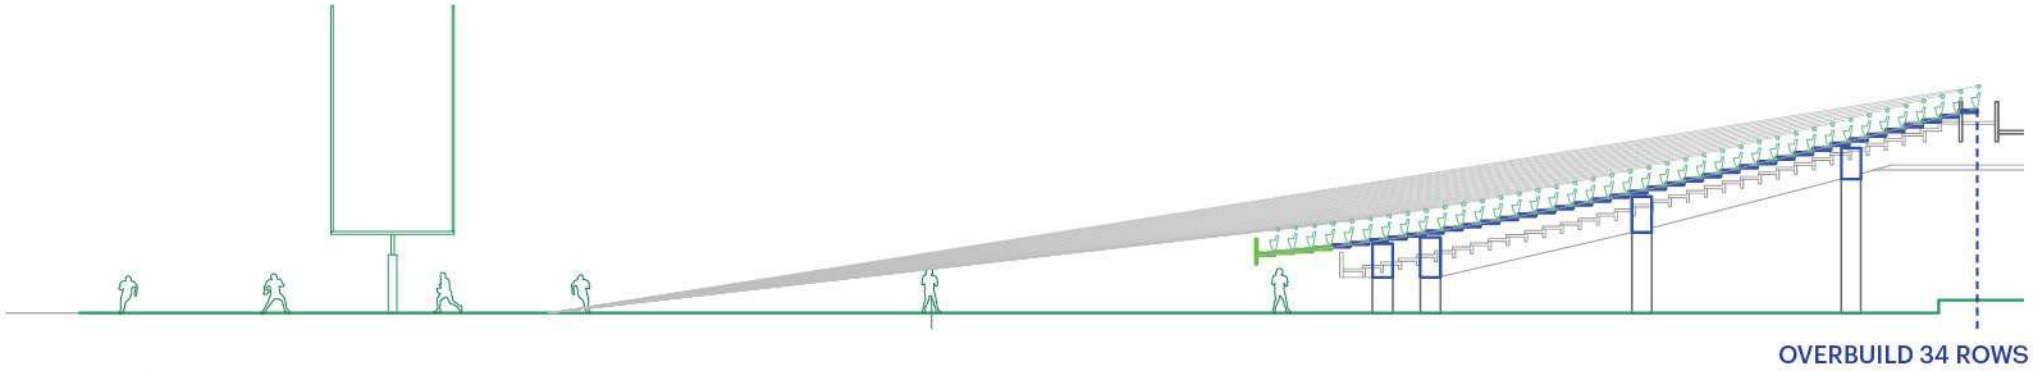

FIELD AT -2FT




NEW 20,266 SF
OVERBUILD 121,247 SF

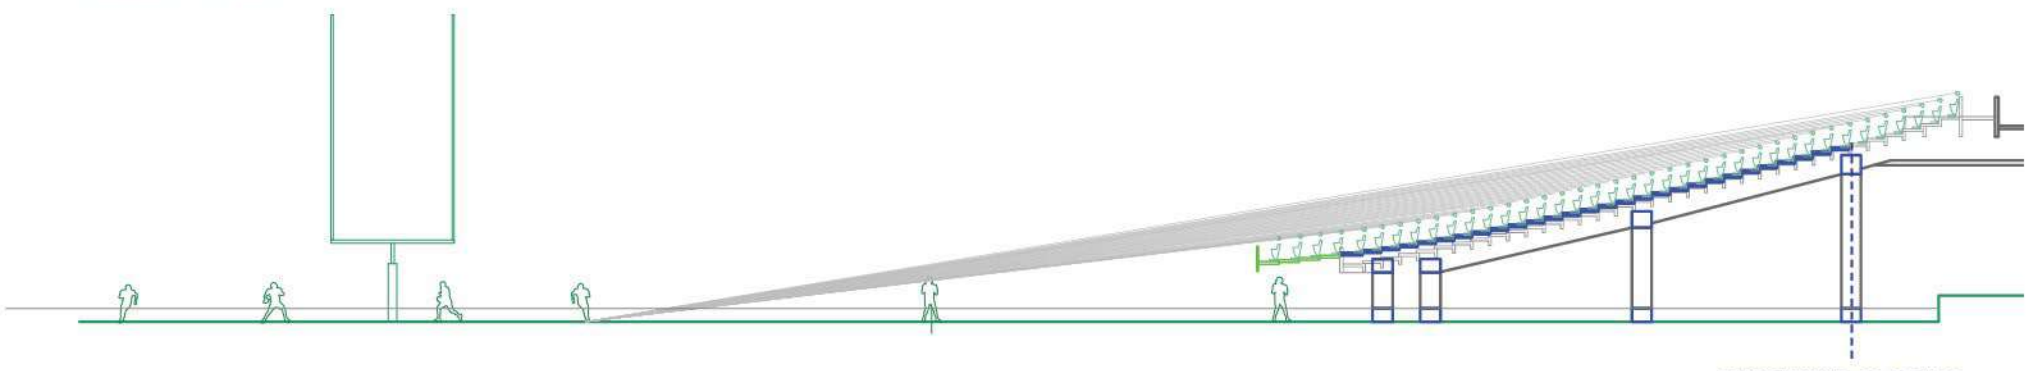

FIELD AT -4FT



NEW 20,266 SF
OVERBUILD 68,658 SF

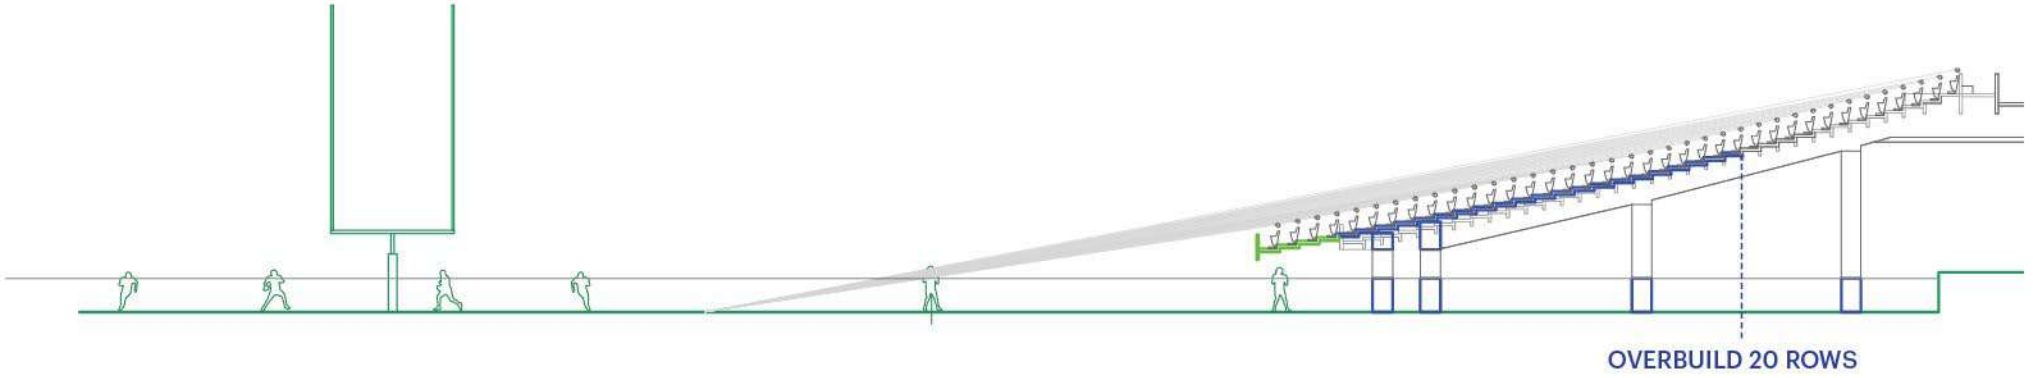

NORTH LOWER BOWL

RIBBON BOARDS
President's Club
-3' x 272 LF

BOWL AREA
-13,605 SF

SEAT DELTA
1,628 seats


BOWL RAKE
29°

ALTERNATE

LOWER BOWL
6,532 seats

CLUB LEVEL
2,128 seats

TOTAL
7,034 seats

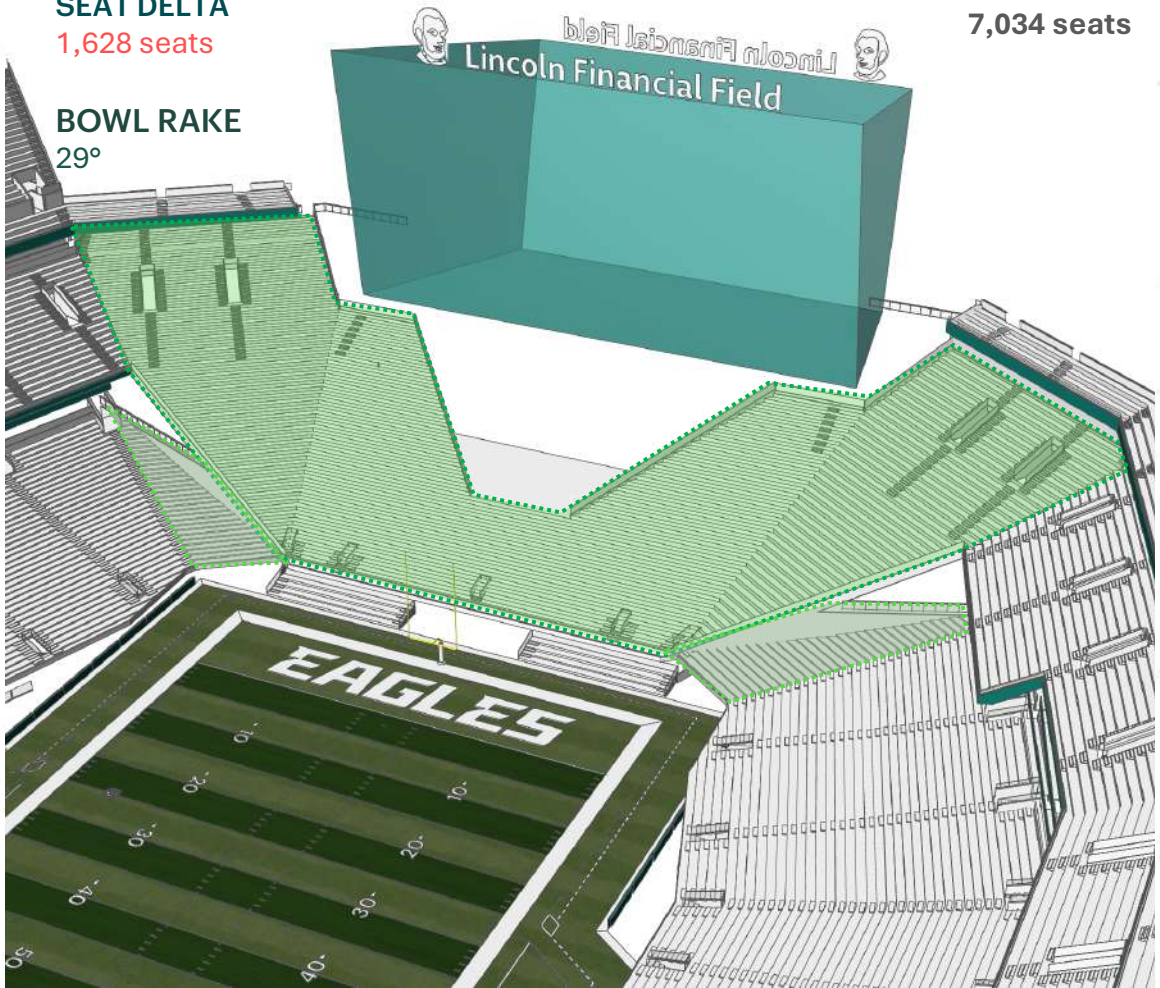


PROPOSED

LOWER BOWL
6,533 seats

CLUB LEVEL
2,129 seats


TOTAL
8,662 seats

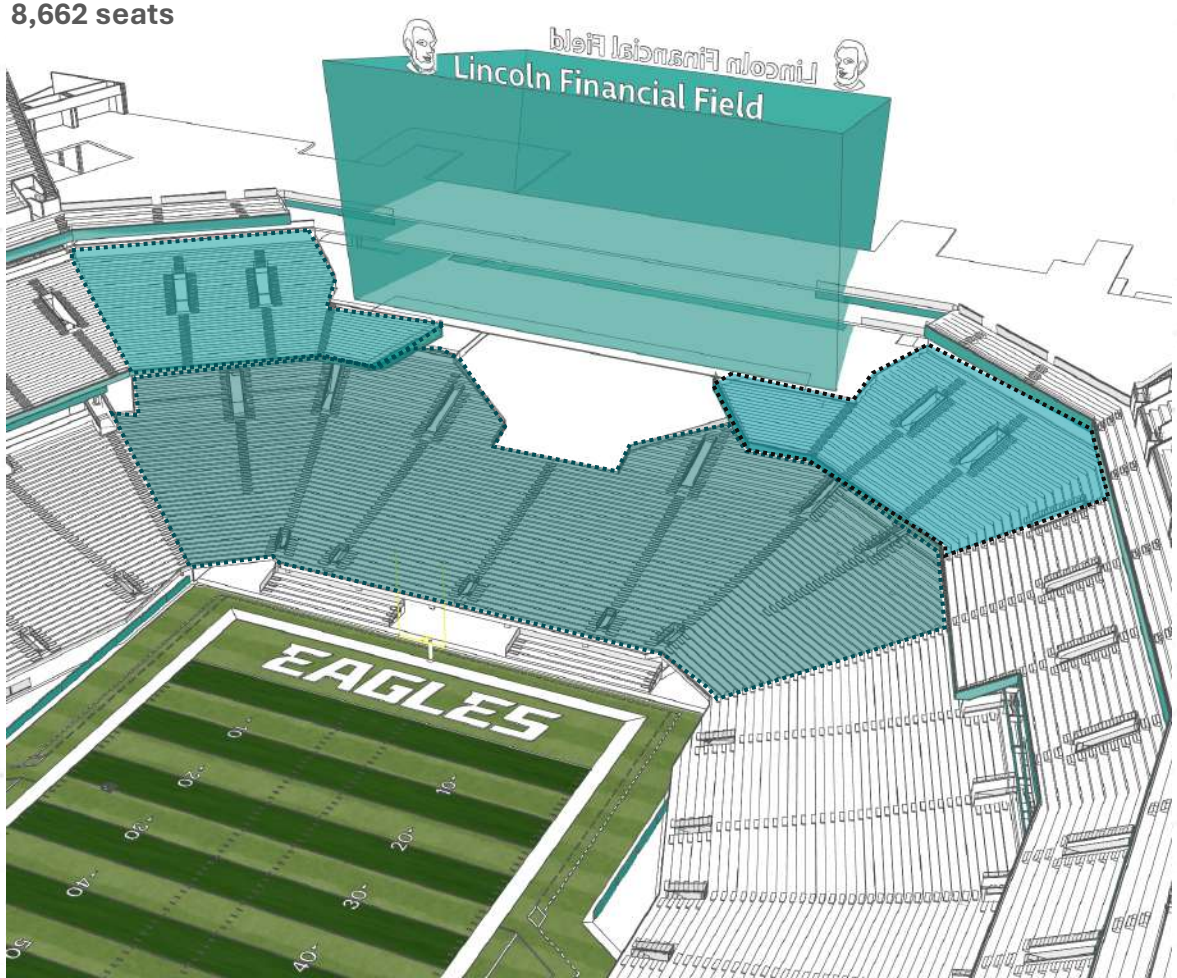


BOWL RAKE
LOWER BOWL 15°
CLUB 27°

NORTH LOWER BOWL

ALTERNATE

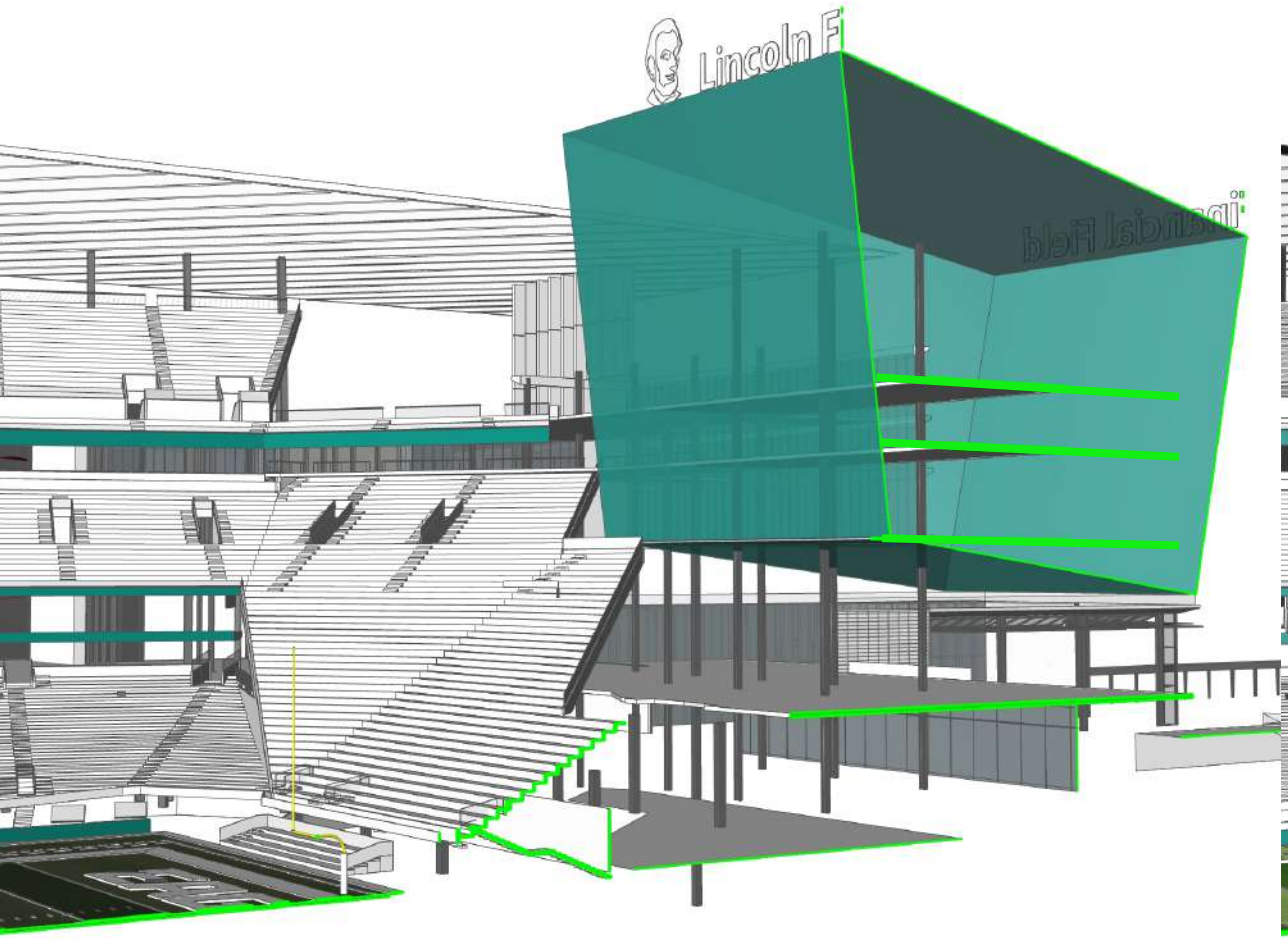


PROPOSED

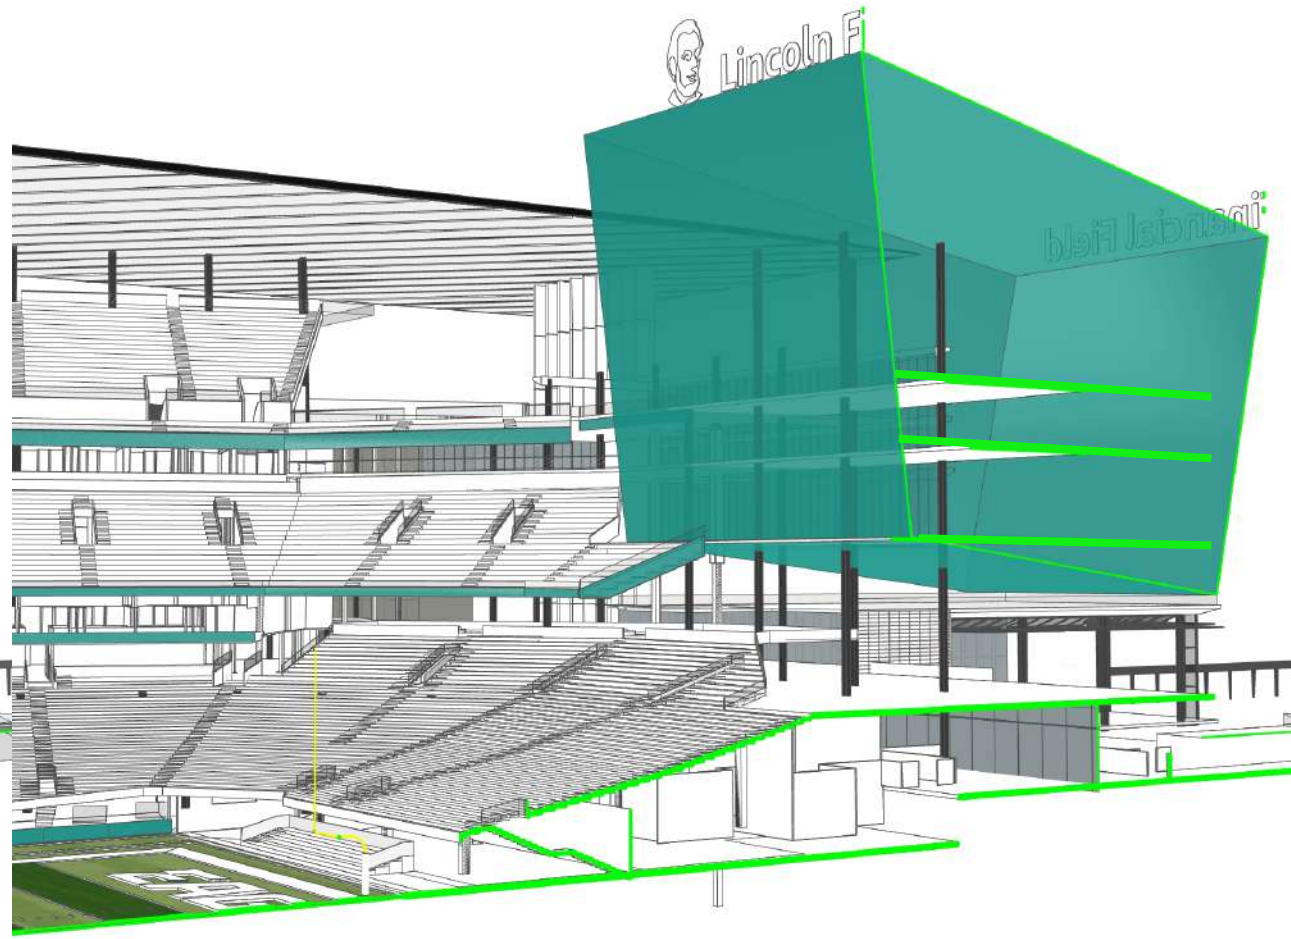


NORTH LOWER BOWL

ALTERNATE

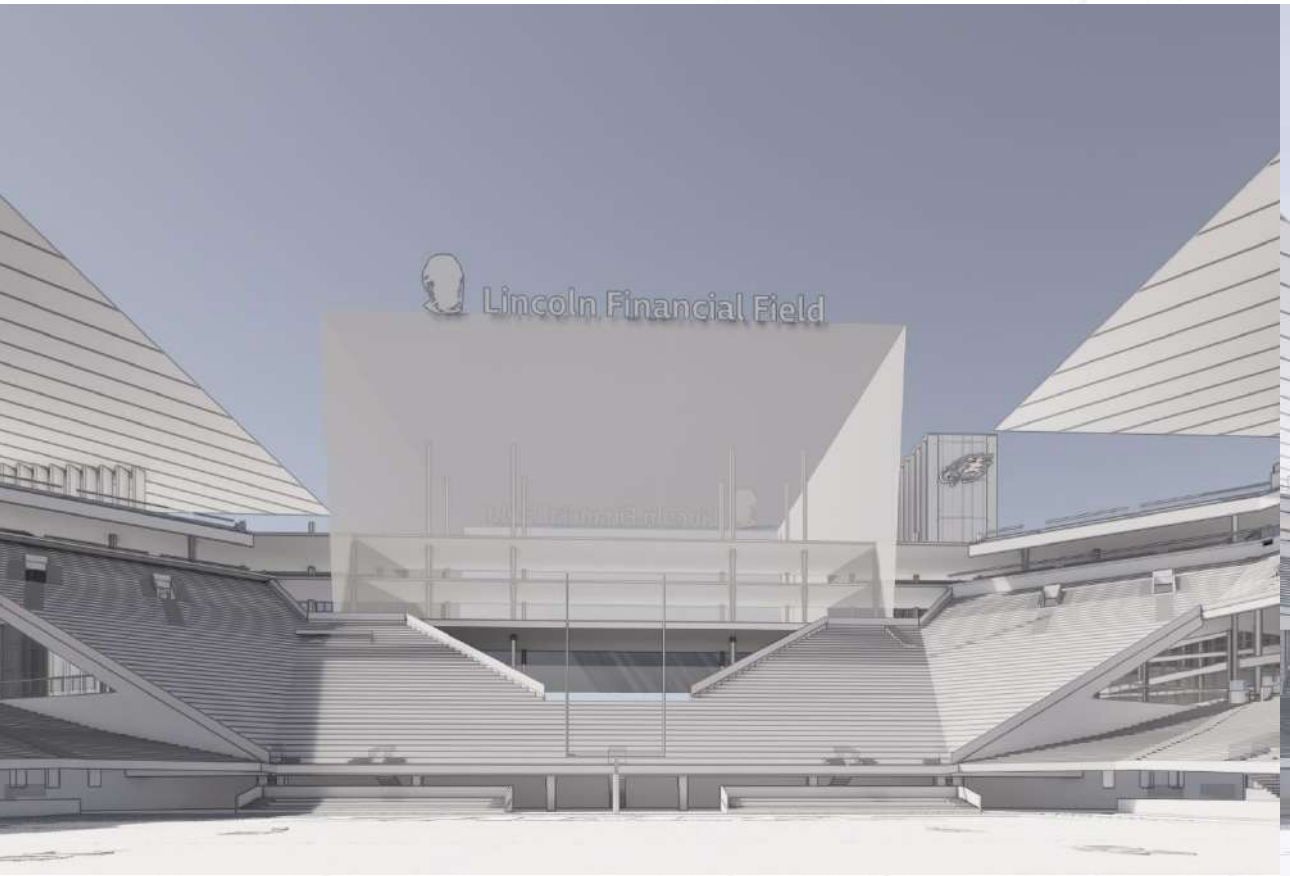


PROPOSED

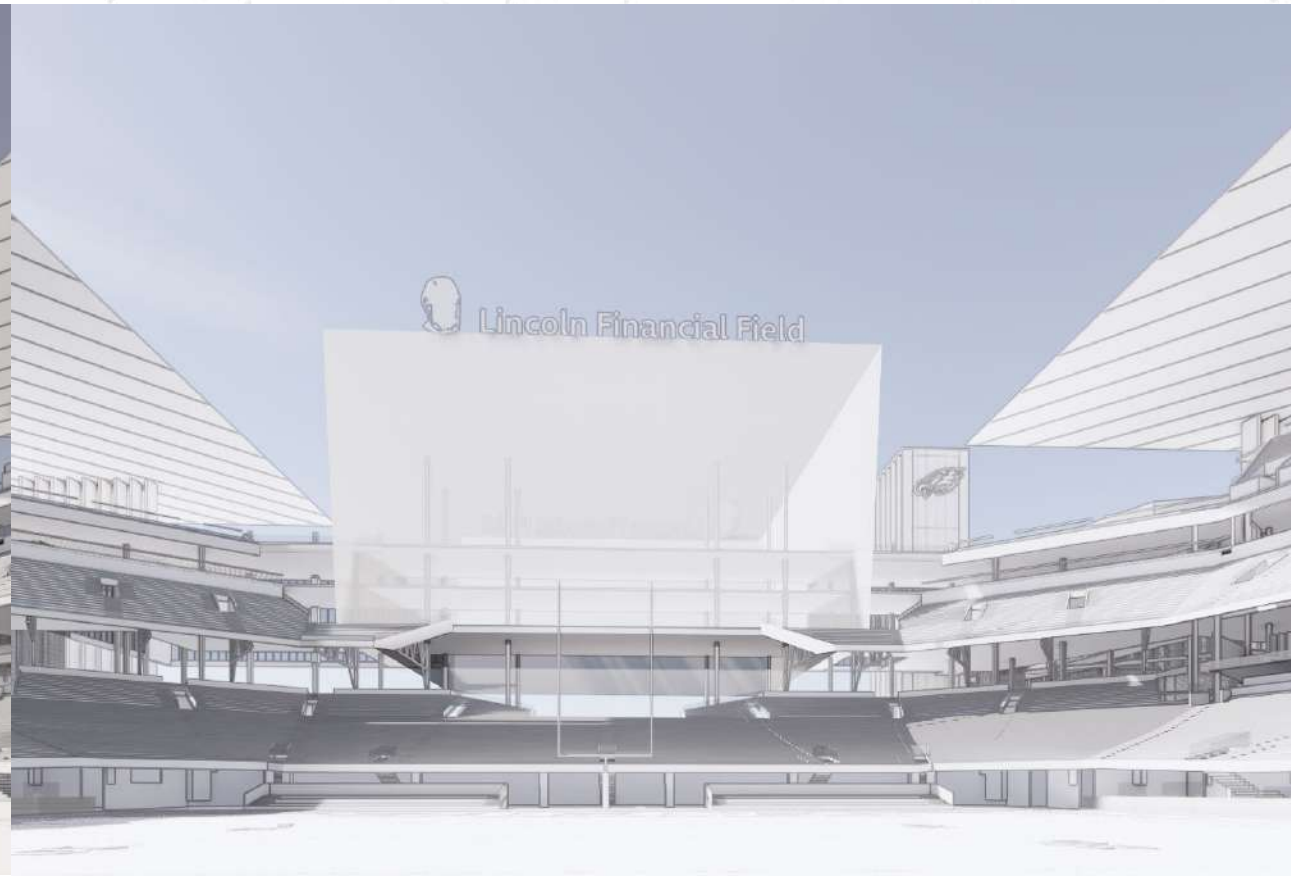


VIDEO TECHNOLOGY

Videoboard

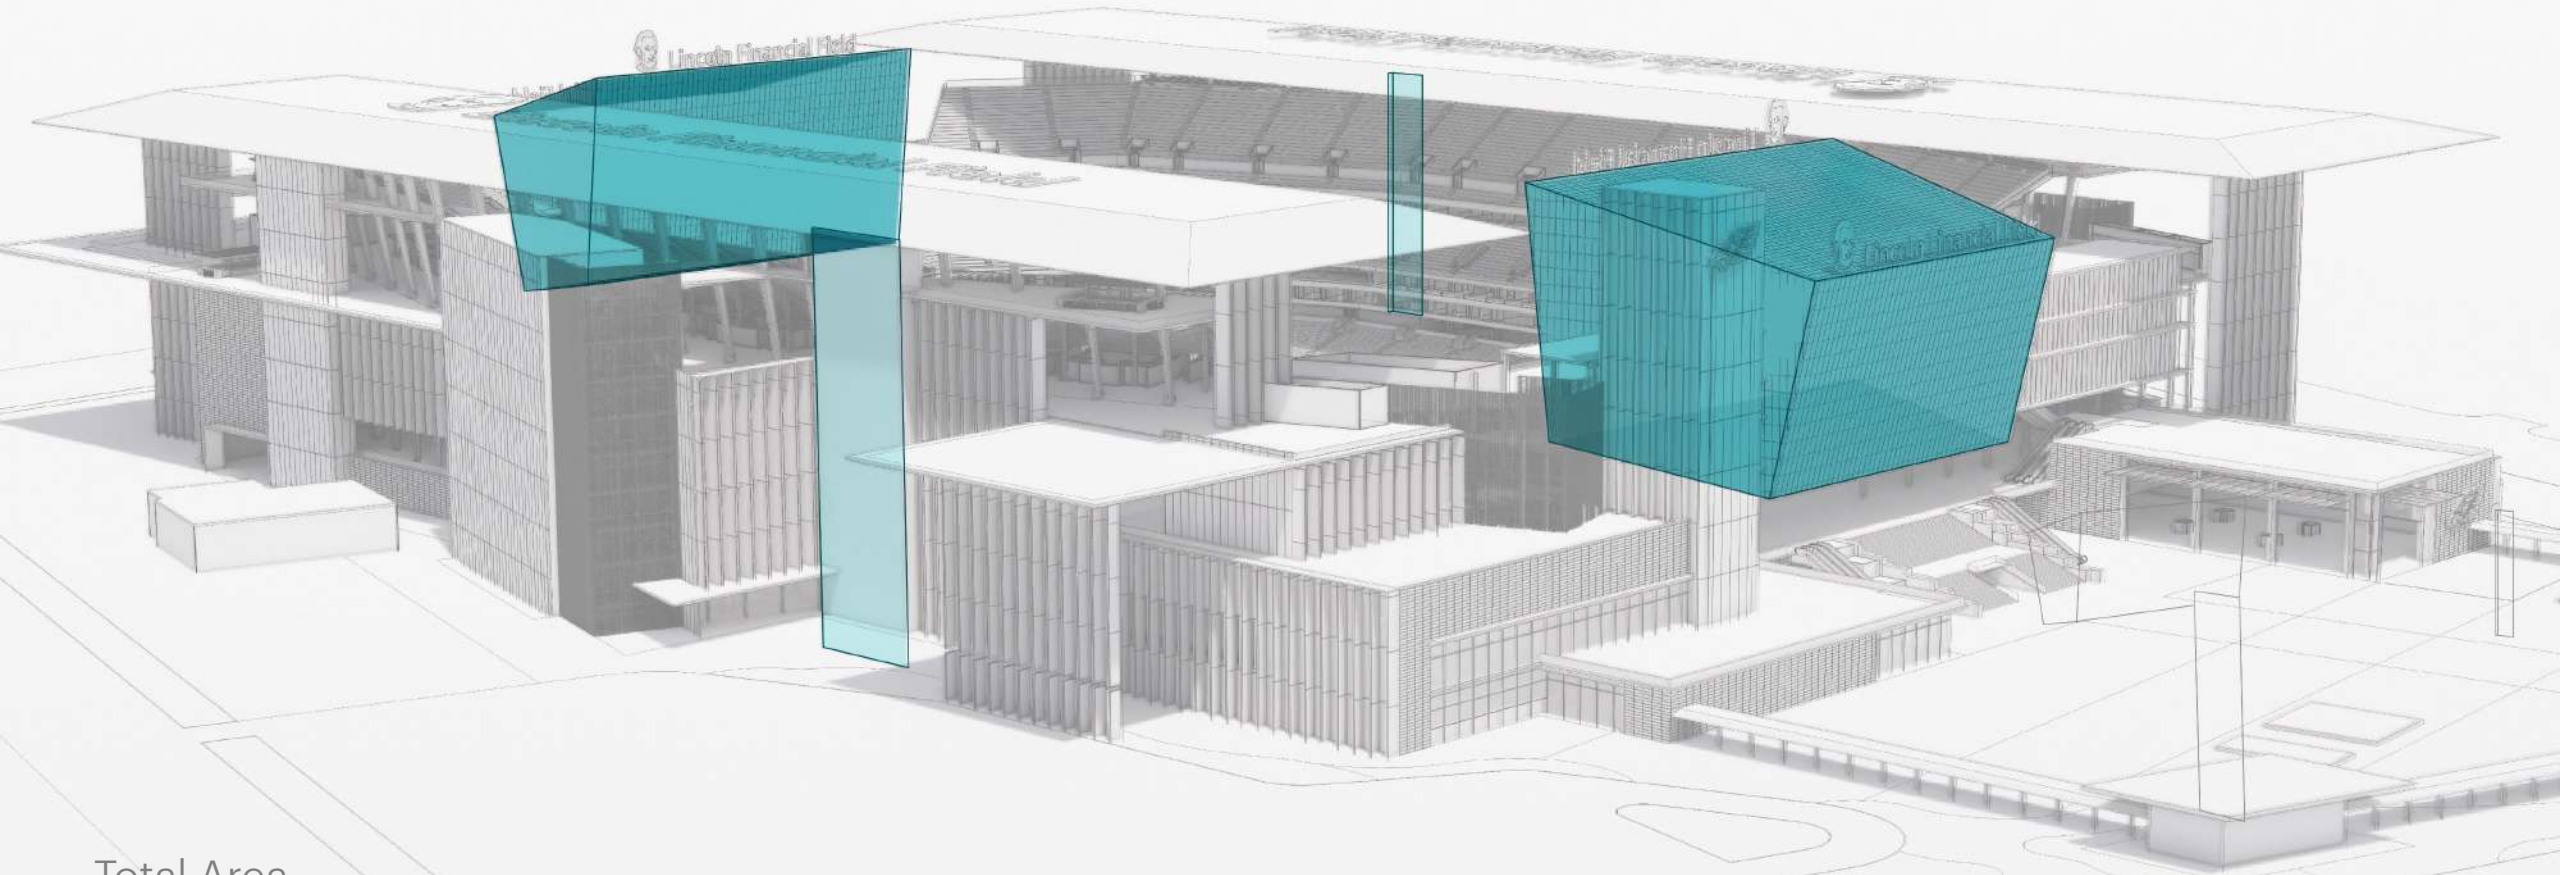


Total Area

224,274 SF

Videoboards


NORTH

Top: 26,977 sf
Bottom: 19,726 sf
North: 16,127 sf
East: 12,217 sf
South: 23,433 sf
West: 12,127 sf

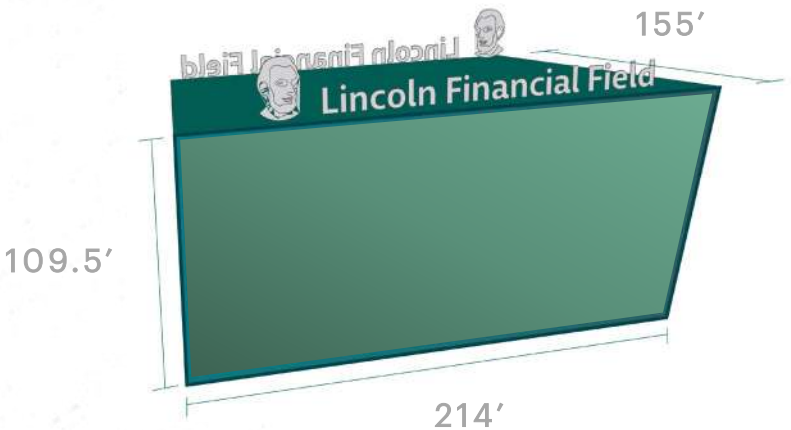

Videoboard size 214′ x 109.5′


Ratio 16:9

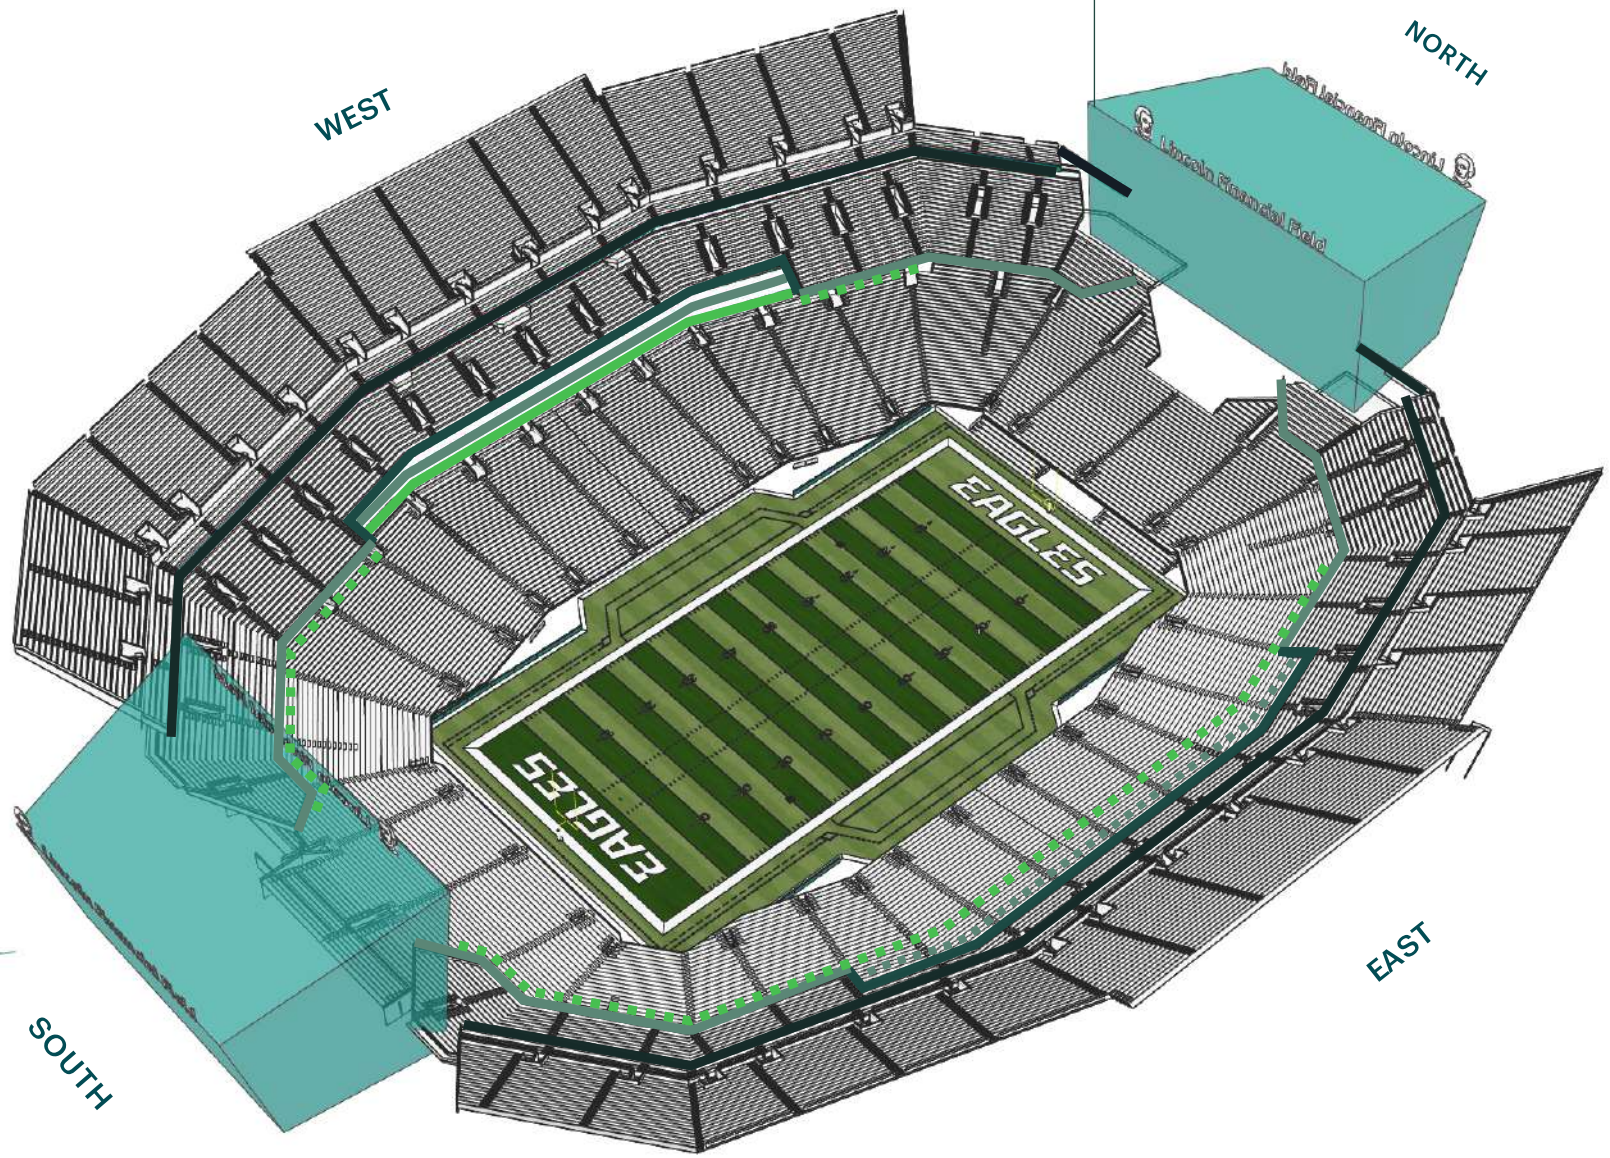


Videoboards

SOUTH

Top: 23,438 sf
Bottom: 16,129 sf
North: 23,433 sf
East: 10,453 sf
South: 16,293 sf
West: 10,453 sf

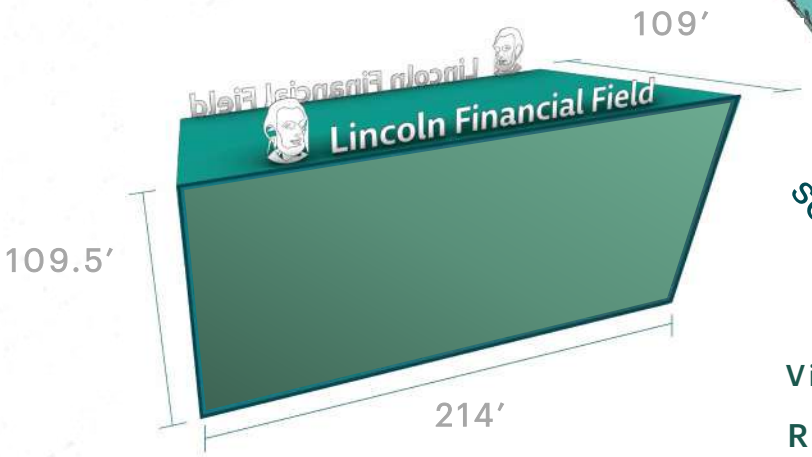

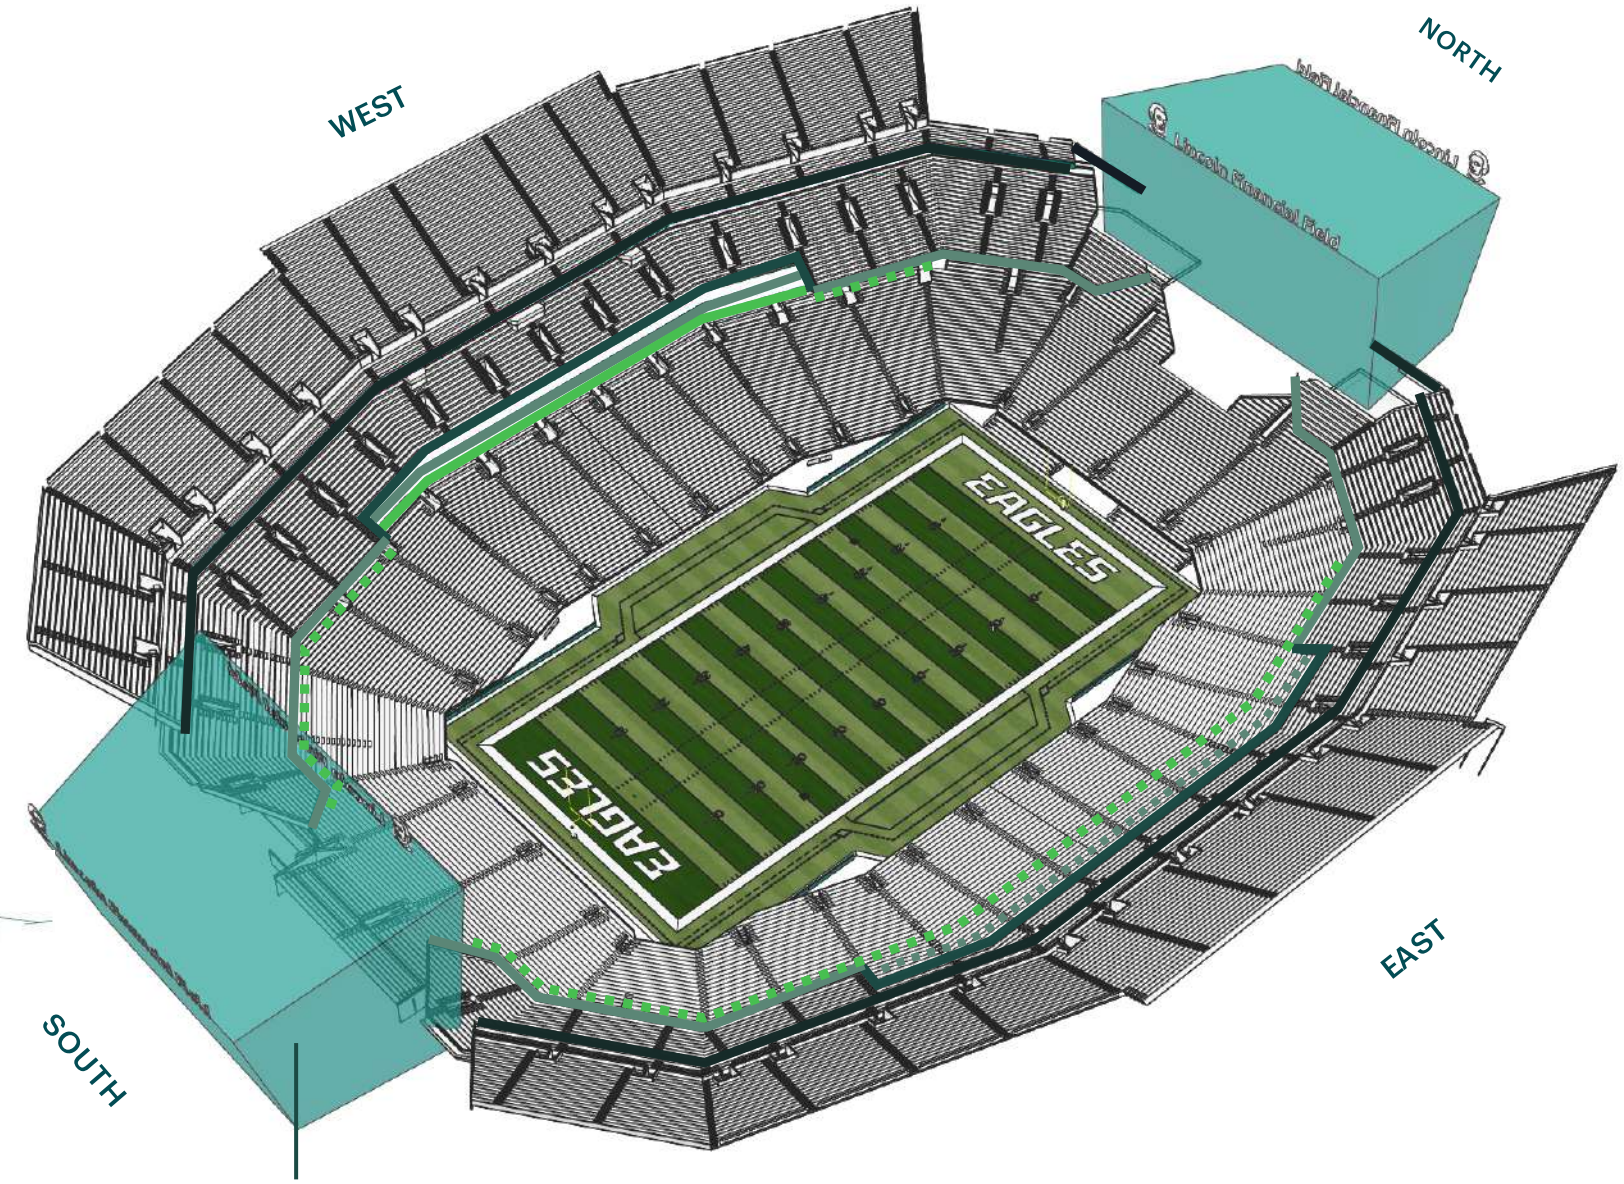

Videoboard size 214′ x 109.5′


Ratio 16:9


Videoboards

RIBBON BOARDS

1. Upper Bowl: 801 LF Total
   3’ x 510 LF*
   New 3’ x 291 LF
2. Club: 375’ LF Total
   New 3’ x 375 LF
3. President’s Club: 827 LF Total
   3’ x 526 LF*
   New 3’ x 301 LF
4. Lower Club: 670 LF Total
   New 3’ x 670 LF
5. Upper Bowl: 801 LF Total
   3’ x 510 LF*
   New 3’ x 291 LF
6. Club: 375’ LF Total
   New 3’ x 375 LF
7. President’s Club: 827 LF Total
   3’ x 526 LF*
   New 3’ x 301 LF
8. Lower Club: 670 LF Total
   New 3’ x 670 LF

*existing to be replaced per FCA

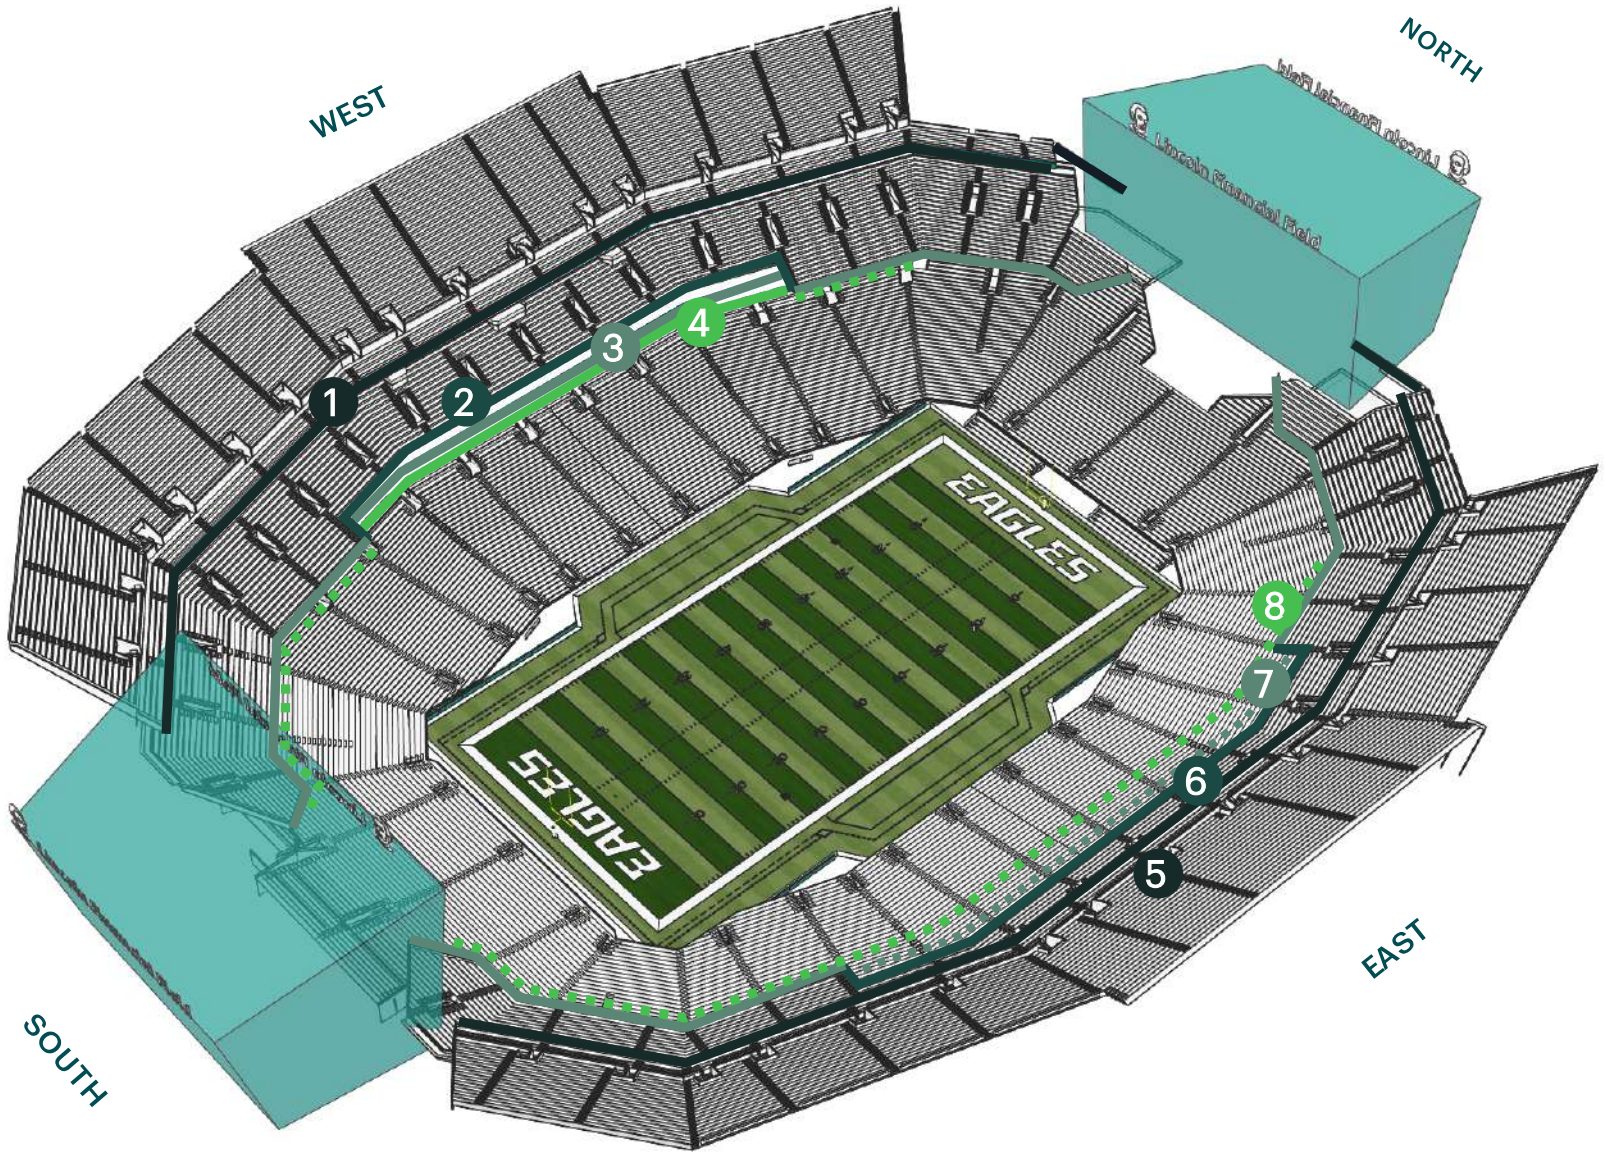

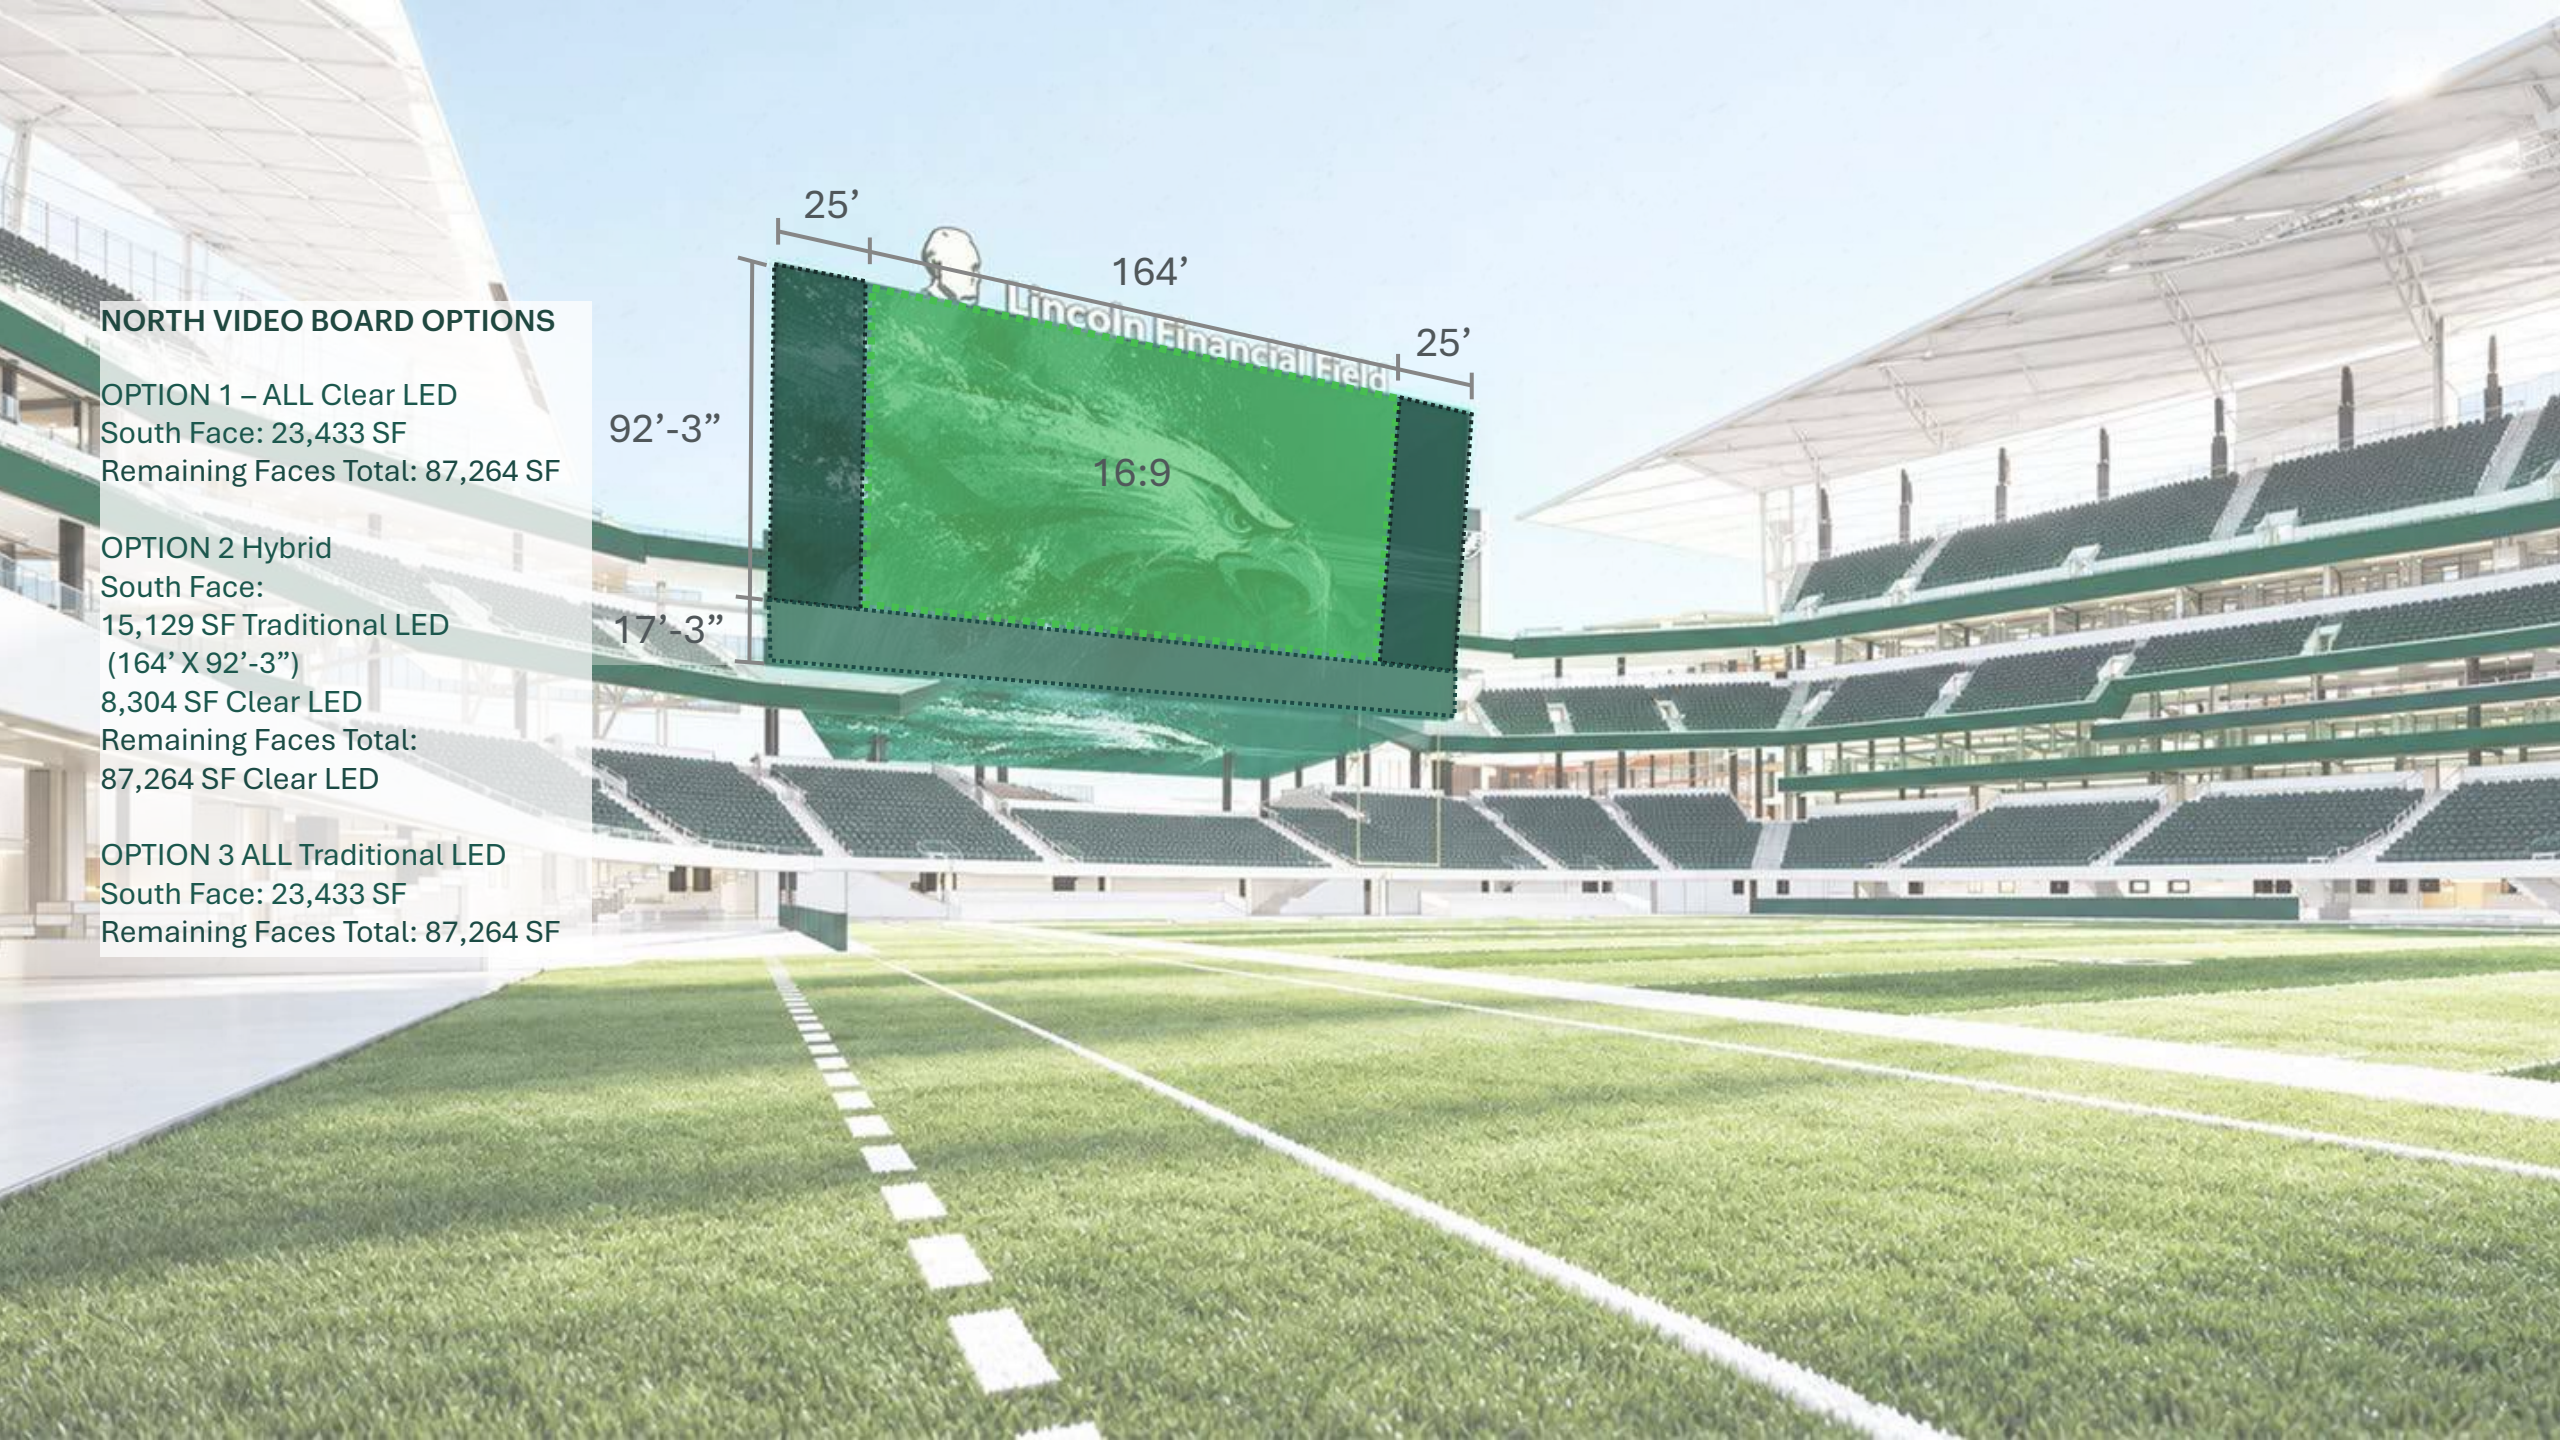


NORTH VIDEO BOARD OPTIONS

OPTION 1 – ALL Clear LED
South Face: 23,433 SF
Remaining Faces Total: 87,264 SF

OPTION 2 Hybrid
South Face:
15,129 SF Traditional LED
(164’ X 92’-3”)
8,304 SF Clear LED
Remaining Faces Total:
87,264 SF Clear LED

OPTION 3 ALL Traditional LED
South Face: 23,433 SF
Remaining Faces Total: 87,264 SF

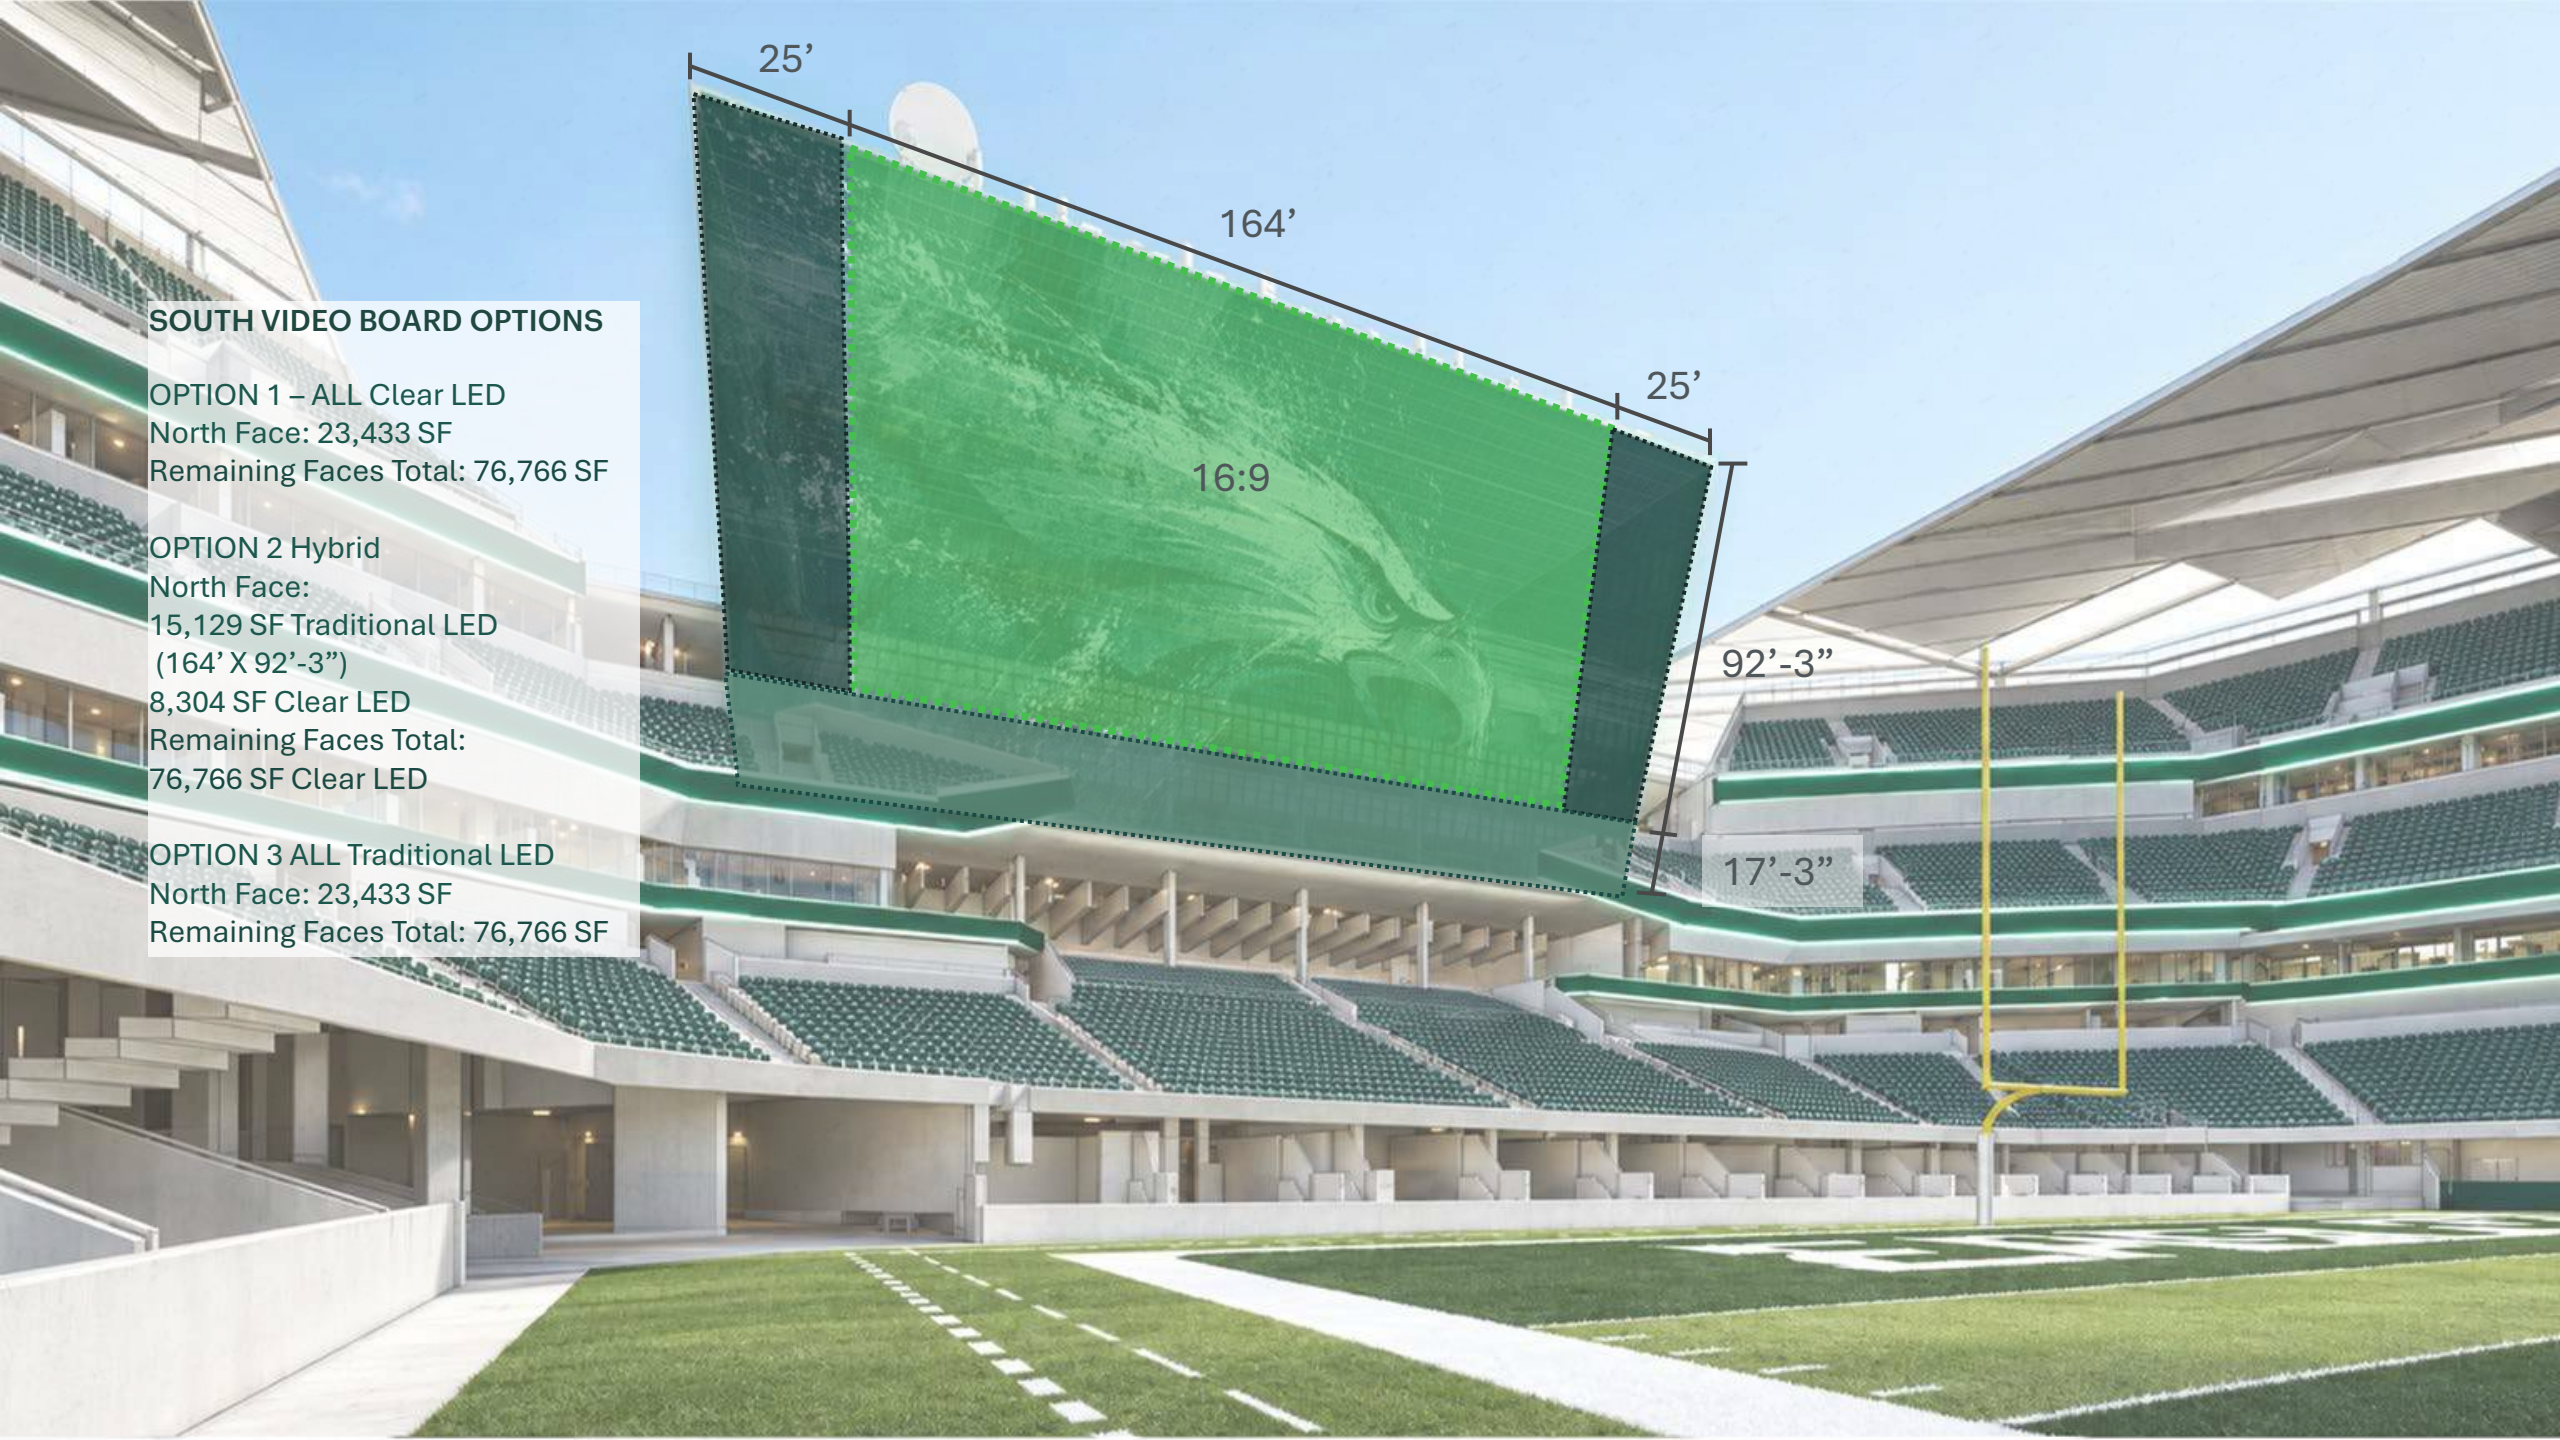

SOUTH VIDEO BOARD OPTIONS


OPTION 1 – ALL Clear LED
North Face: 23,433 SF
Remaining Faces Total: 76,766 SF

OPTION 2 Hybrid
North Face:
15,129 SF Traditional LED
(164’ X 92’-3”)
8,304 SF Clear LED
Remaining Faces Total:
76,766 SF Clear LED


OPTION 3 ALL Traditional LED
North Face: 23,433 SF
Remaining Faces Total: 76,766 SF


SITE / LANDSCAPE
DESIGN by STUDIO-MLA

SITE PLAN

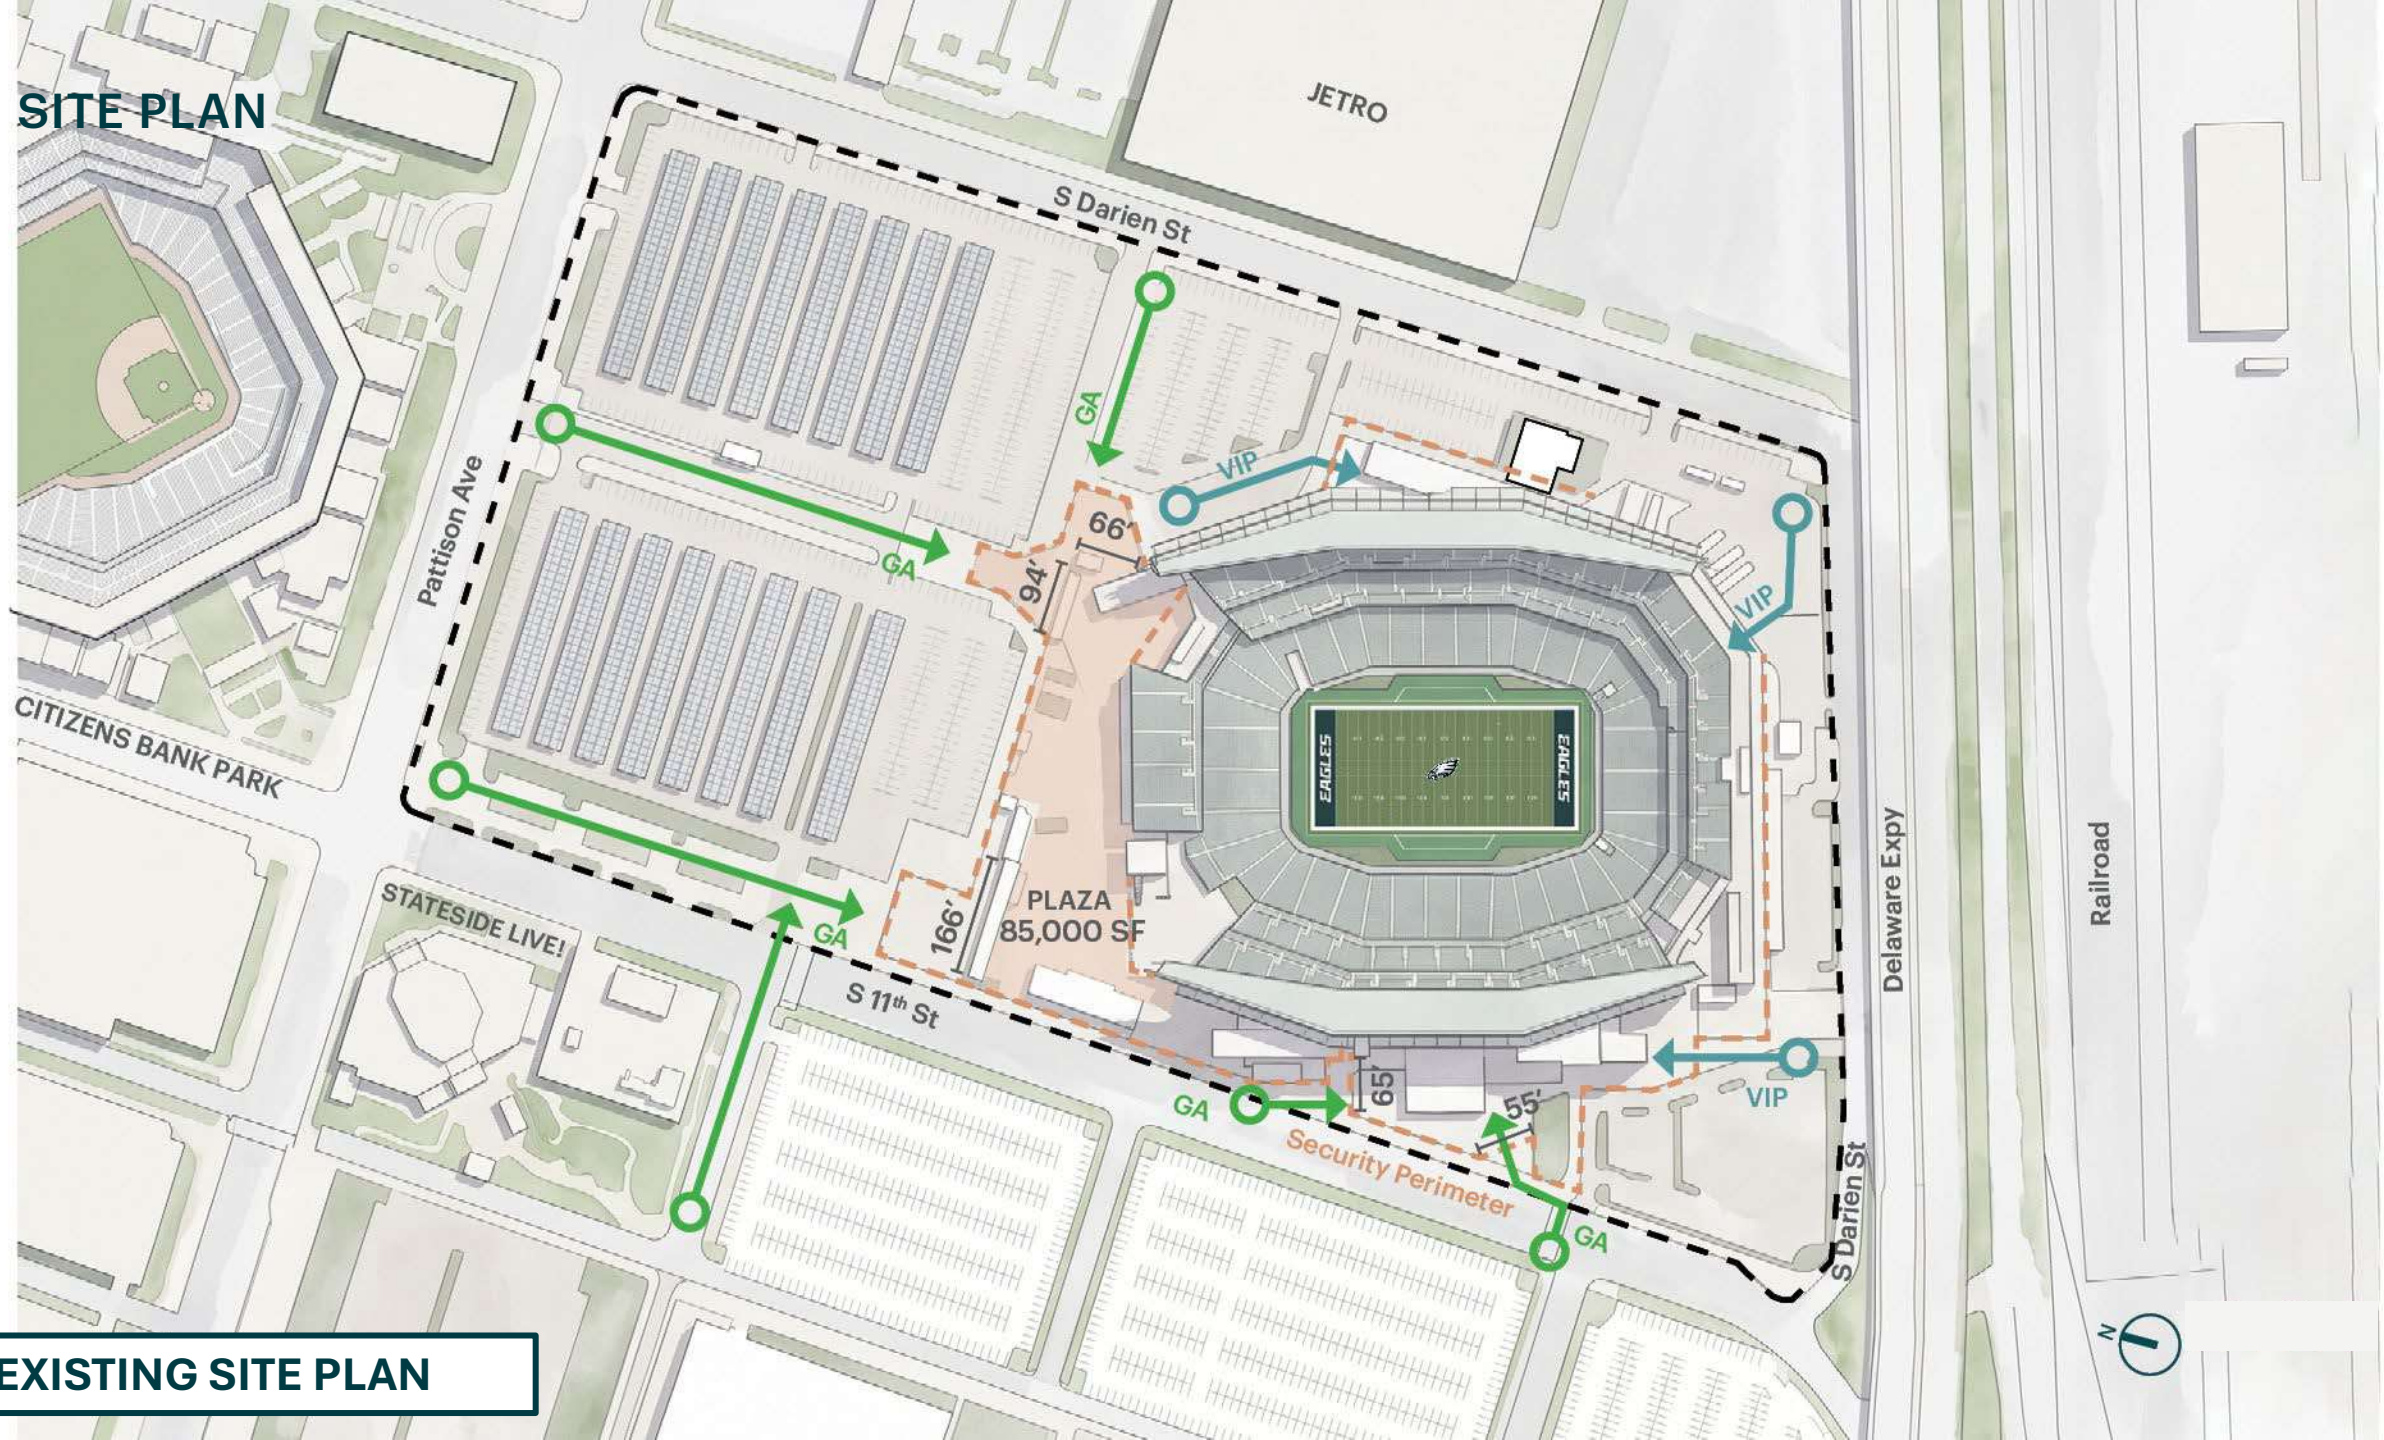


EXISTING SITE PLAN

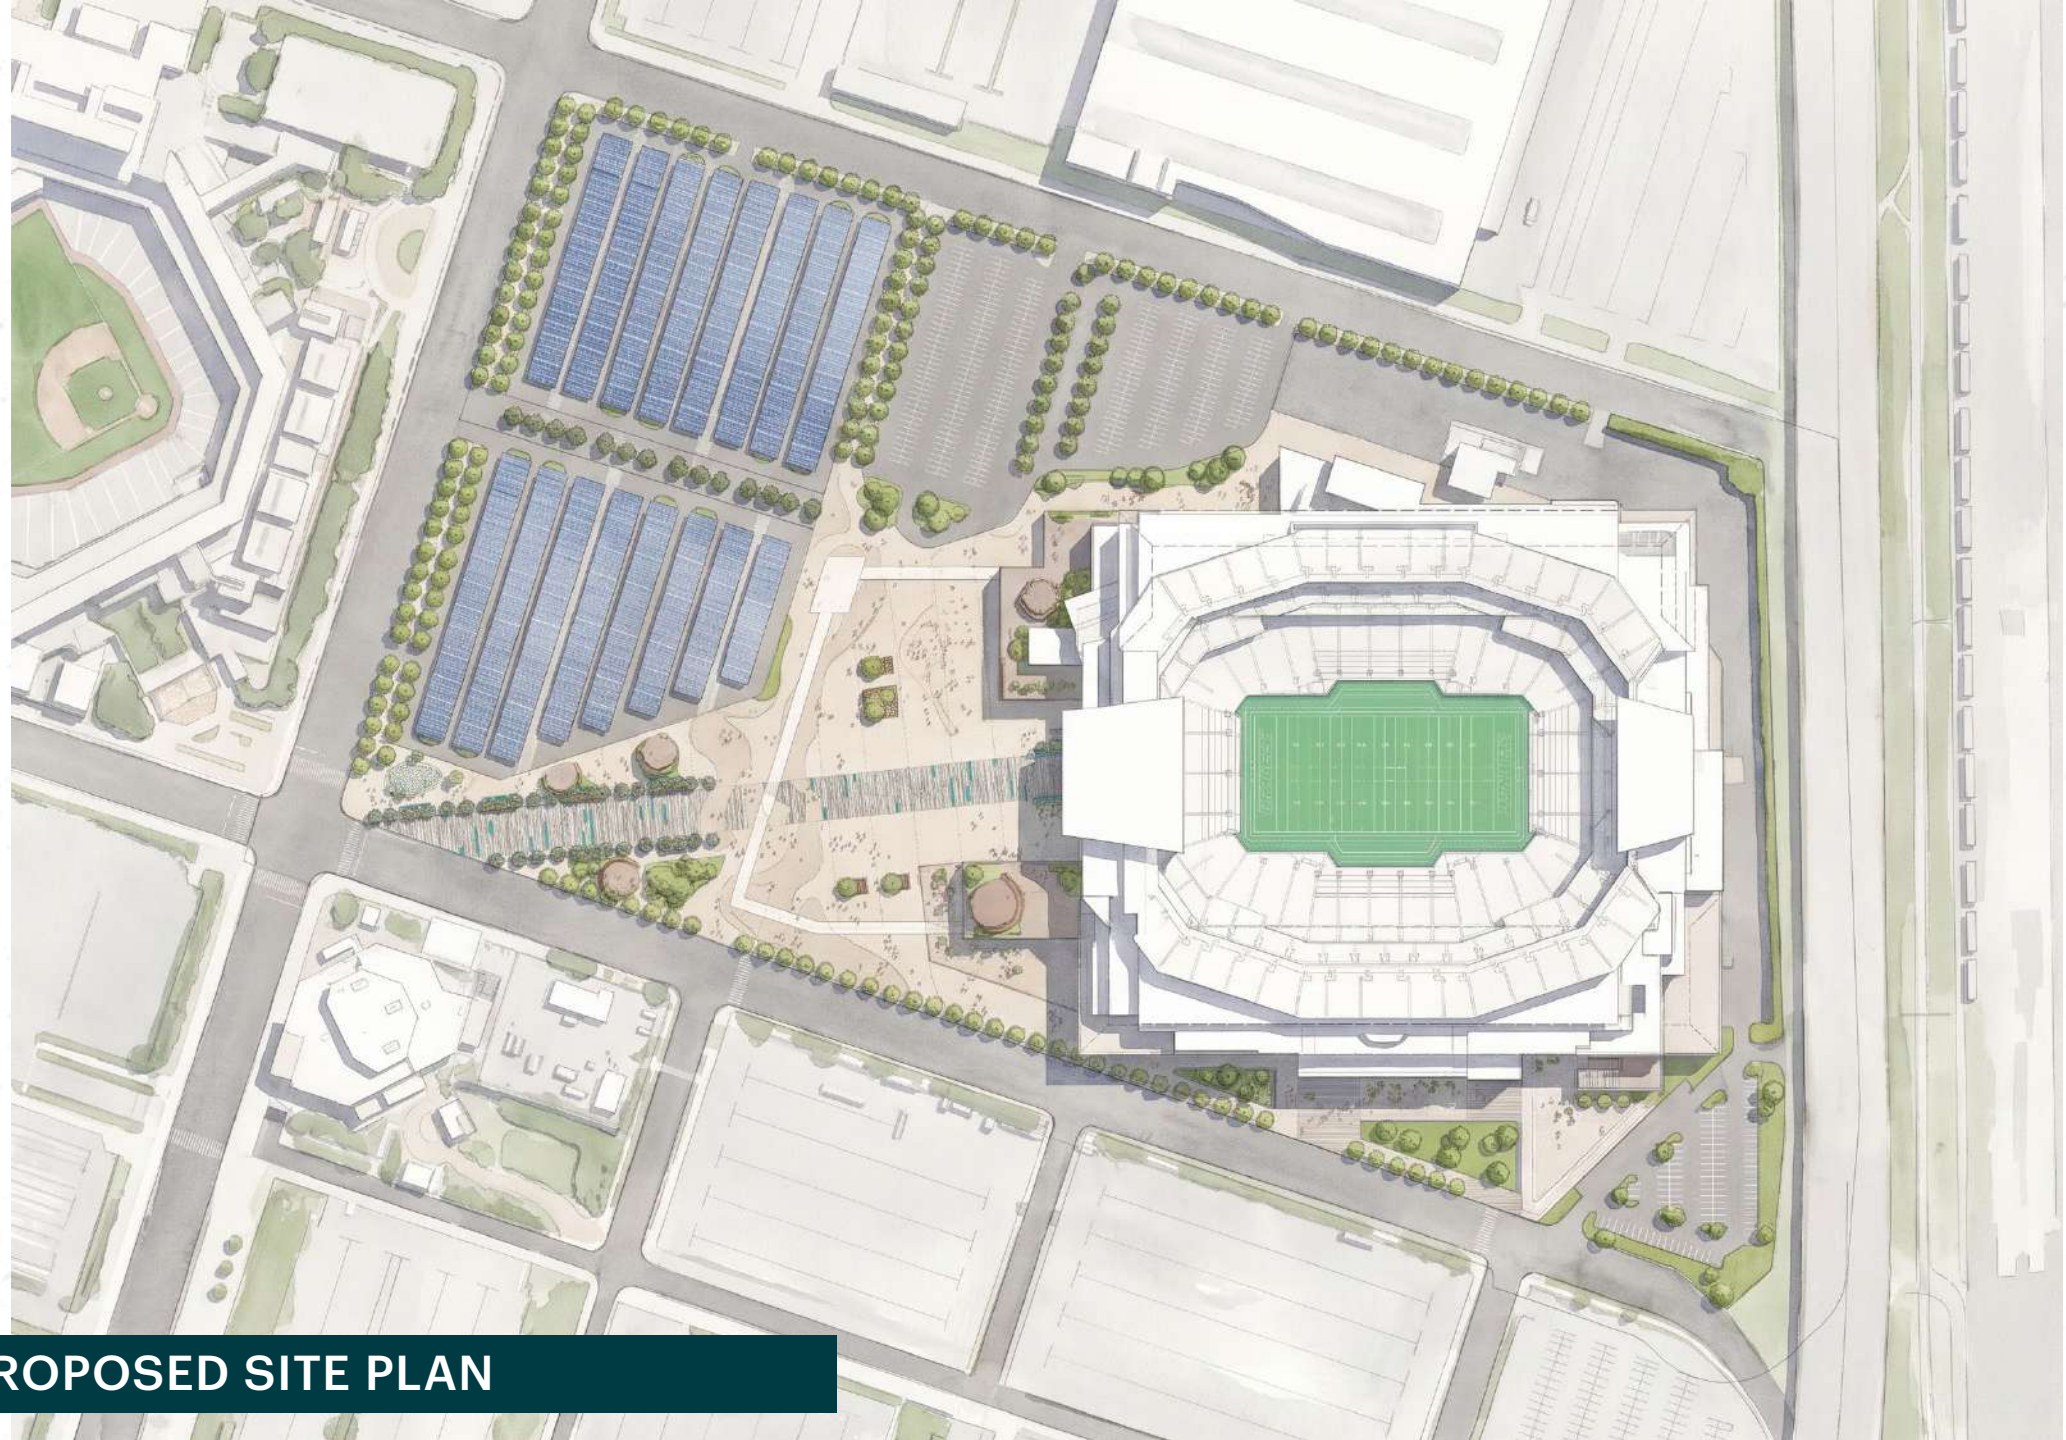

PROPOSED SITE PLAN



PROPOSED SITE PLAN

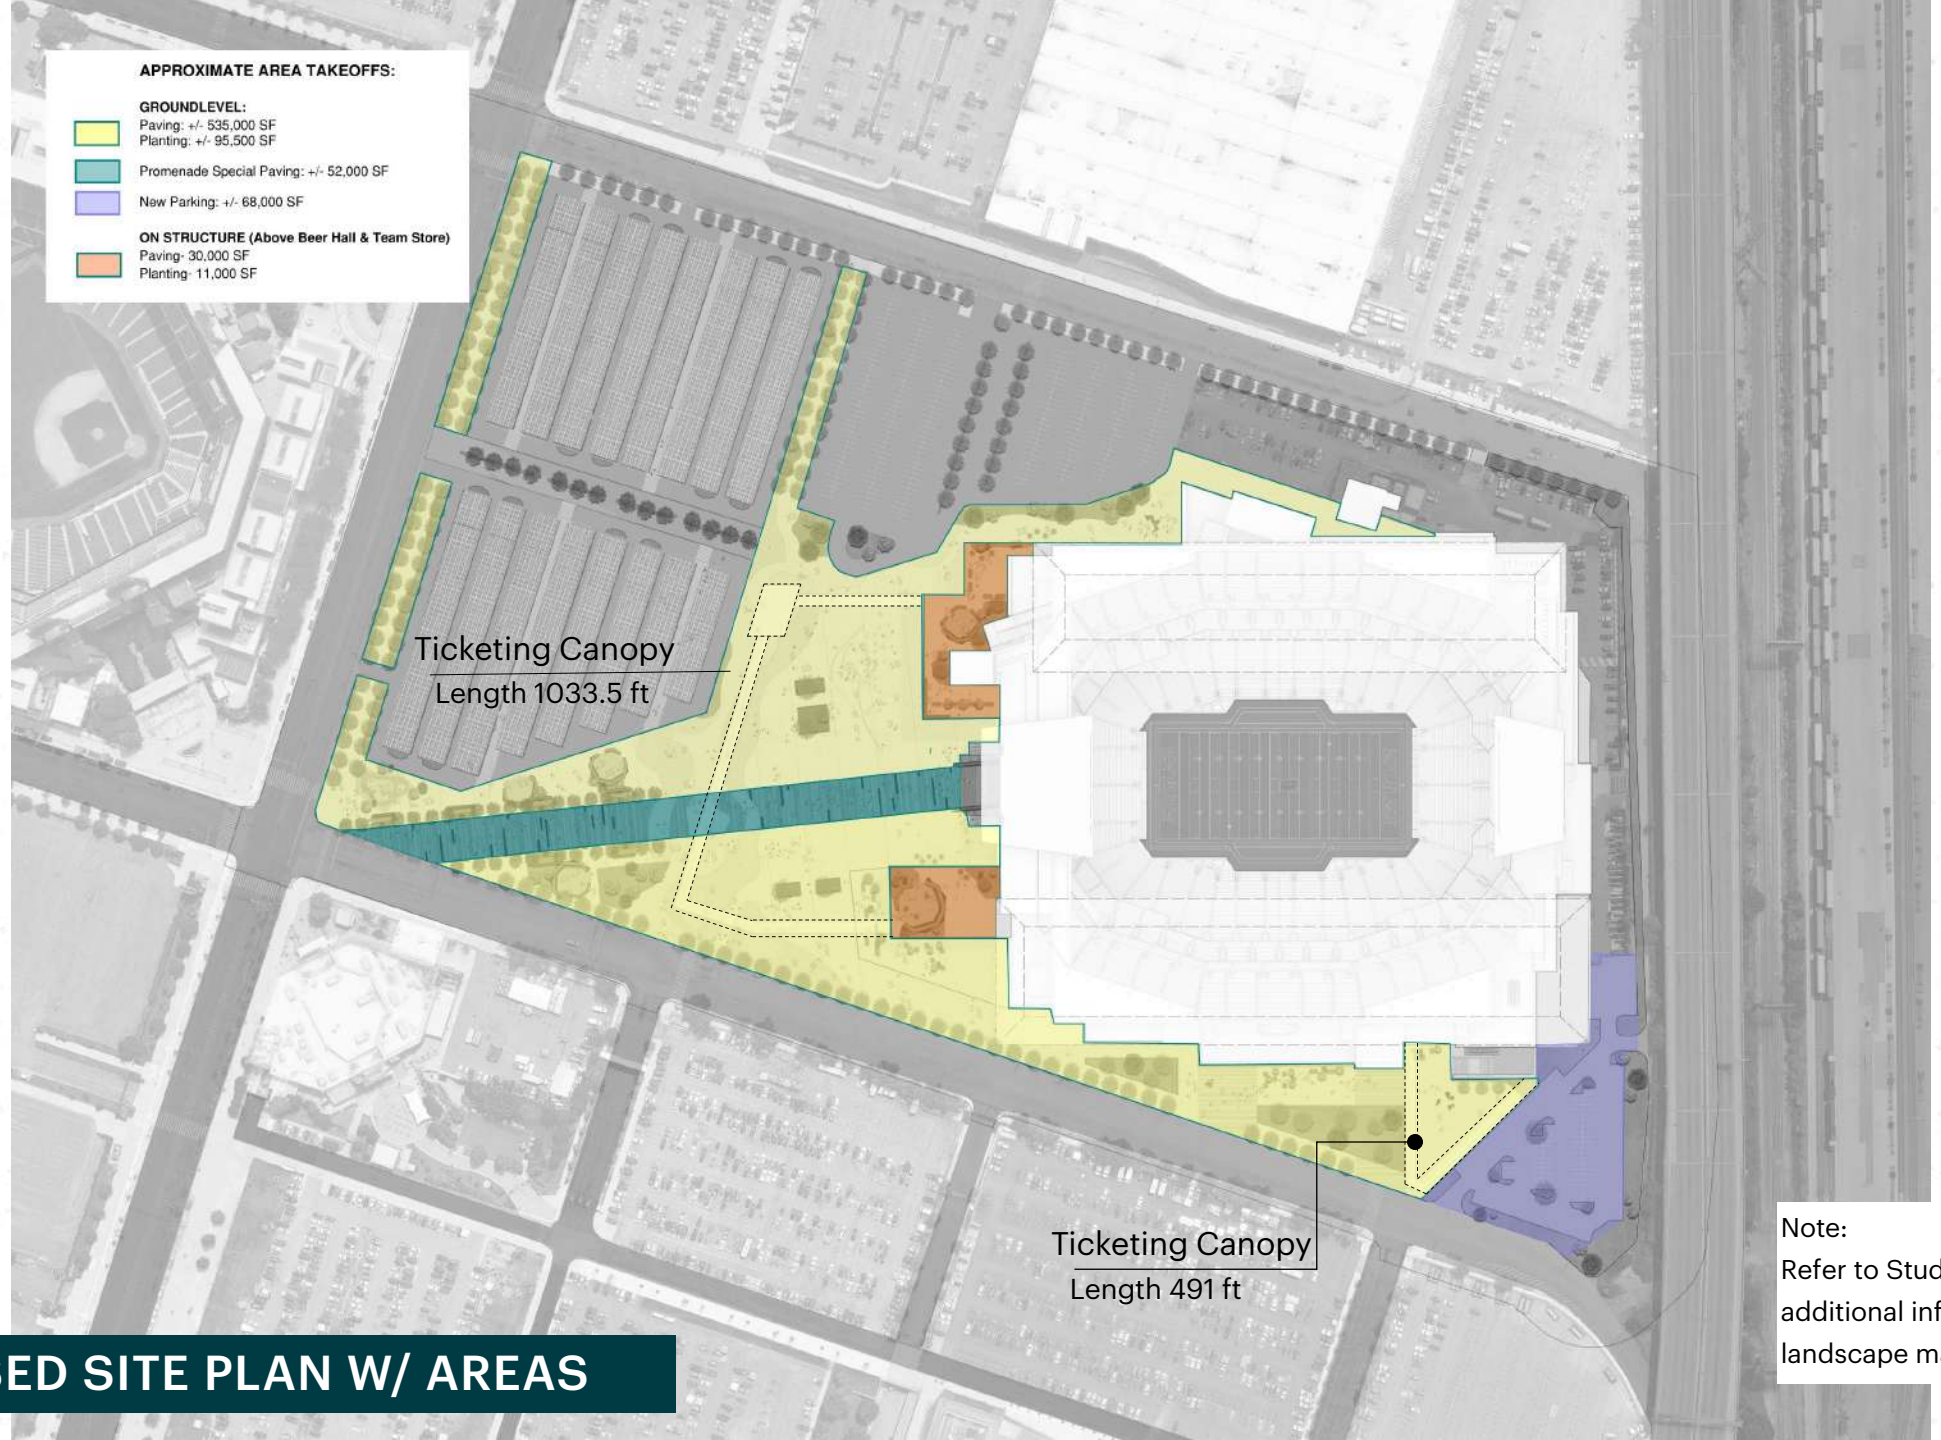


PROPOSED SITE PLAN W/ AREAS


Note:
Refer to Studio MLA Narrative for additional information on plaza and landscape materials.


STADIUM PLANNING

Gross Area – Level by Level

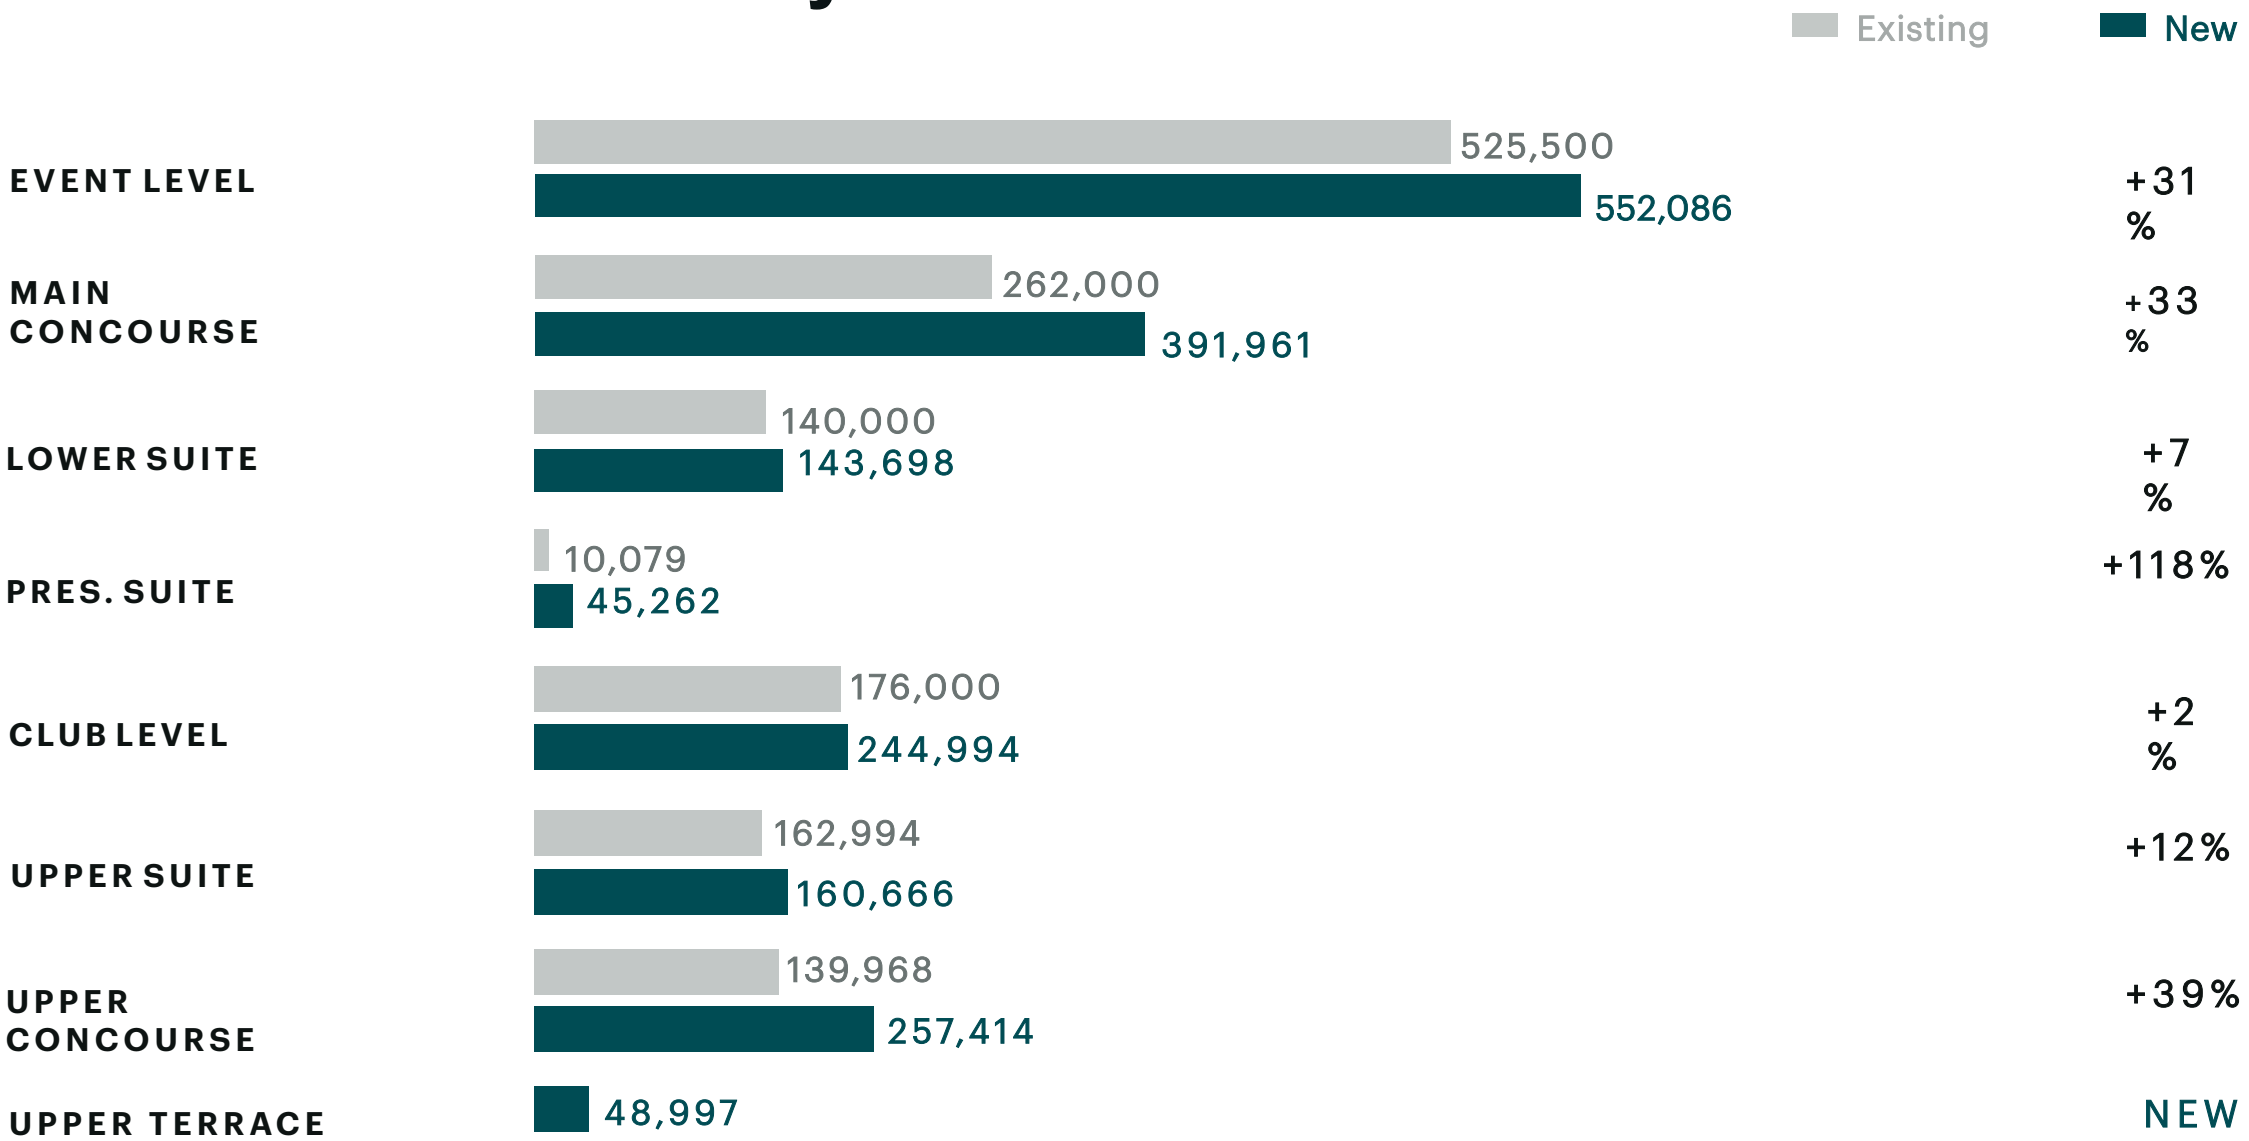

Existing Conditioned & Open

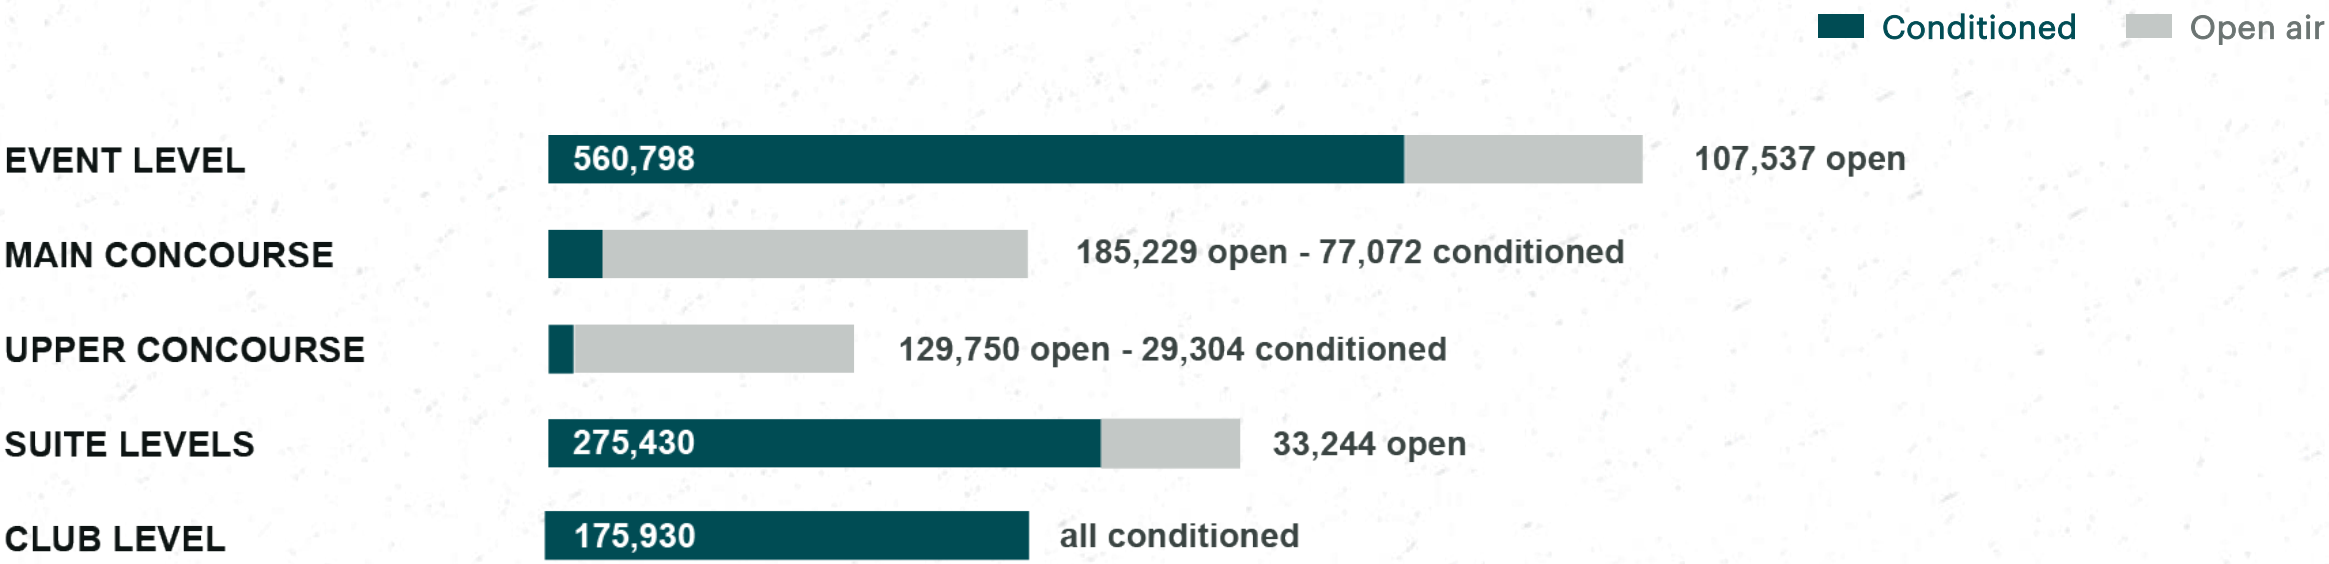

1,091,547

Square feet conditioned


833,776

Square feet open air

96%

Of the main concourse stays open to the air, under the new canopy

Conditioned & Open

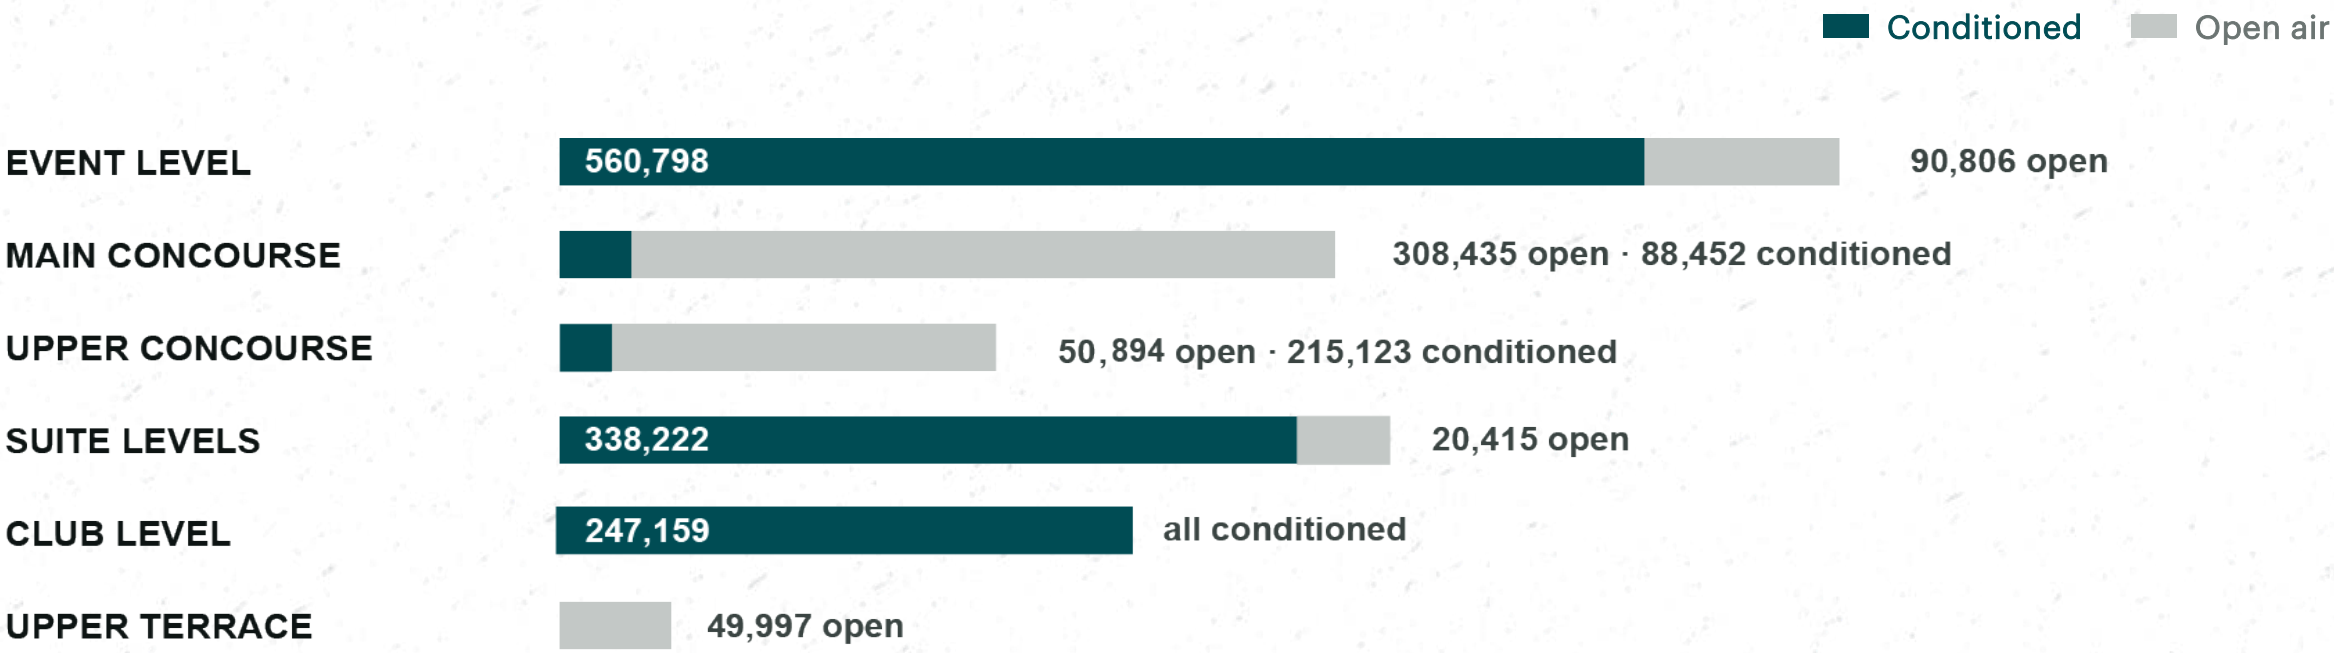

1,285,525


Square feet conditioned

683,807

Square feet open air

96%


Of the main concourse stays open to the air, under the new canopy

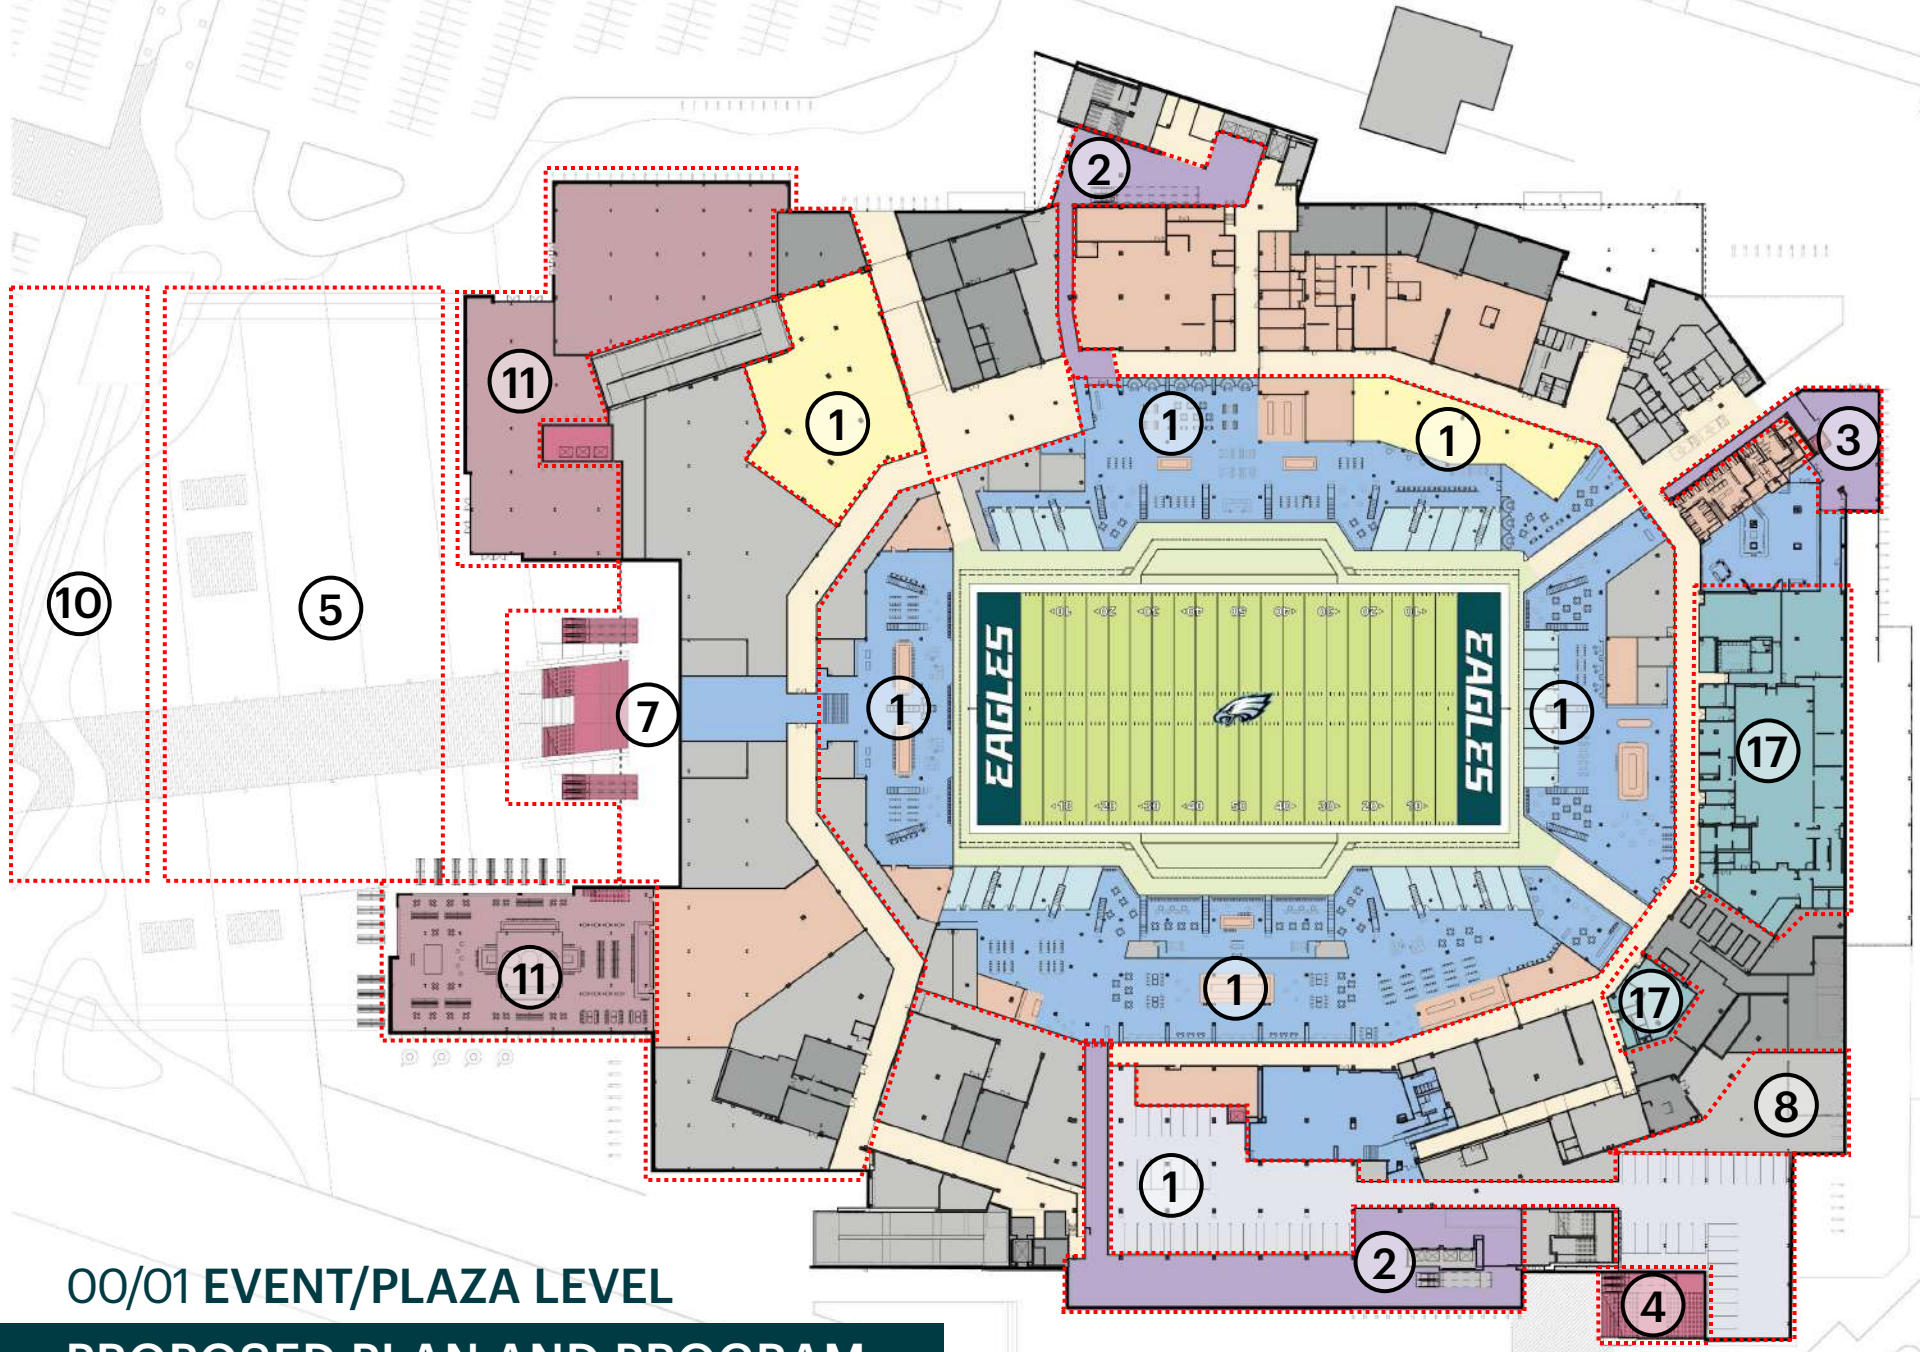

00/01 EVENT/PLAZA LEVEL

PROPOSED PLAN AND PROGRAM

Note:
All numbers indicated on plans refer to 10-year and 20-year project list at the end of planning section.

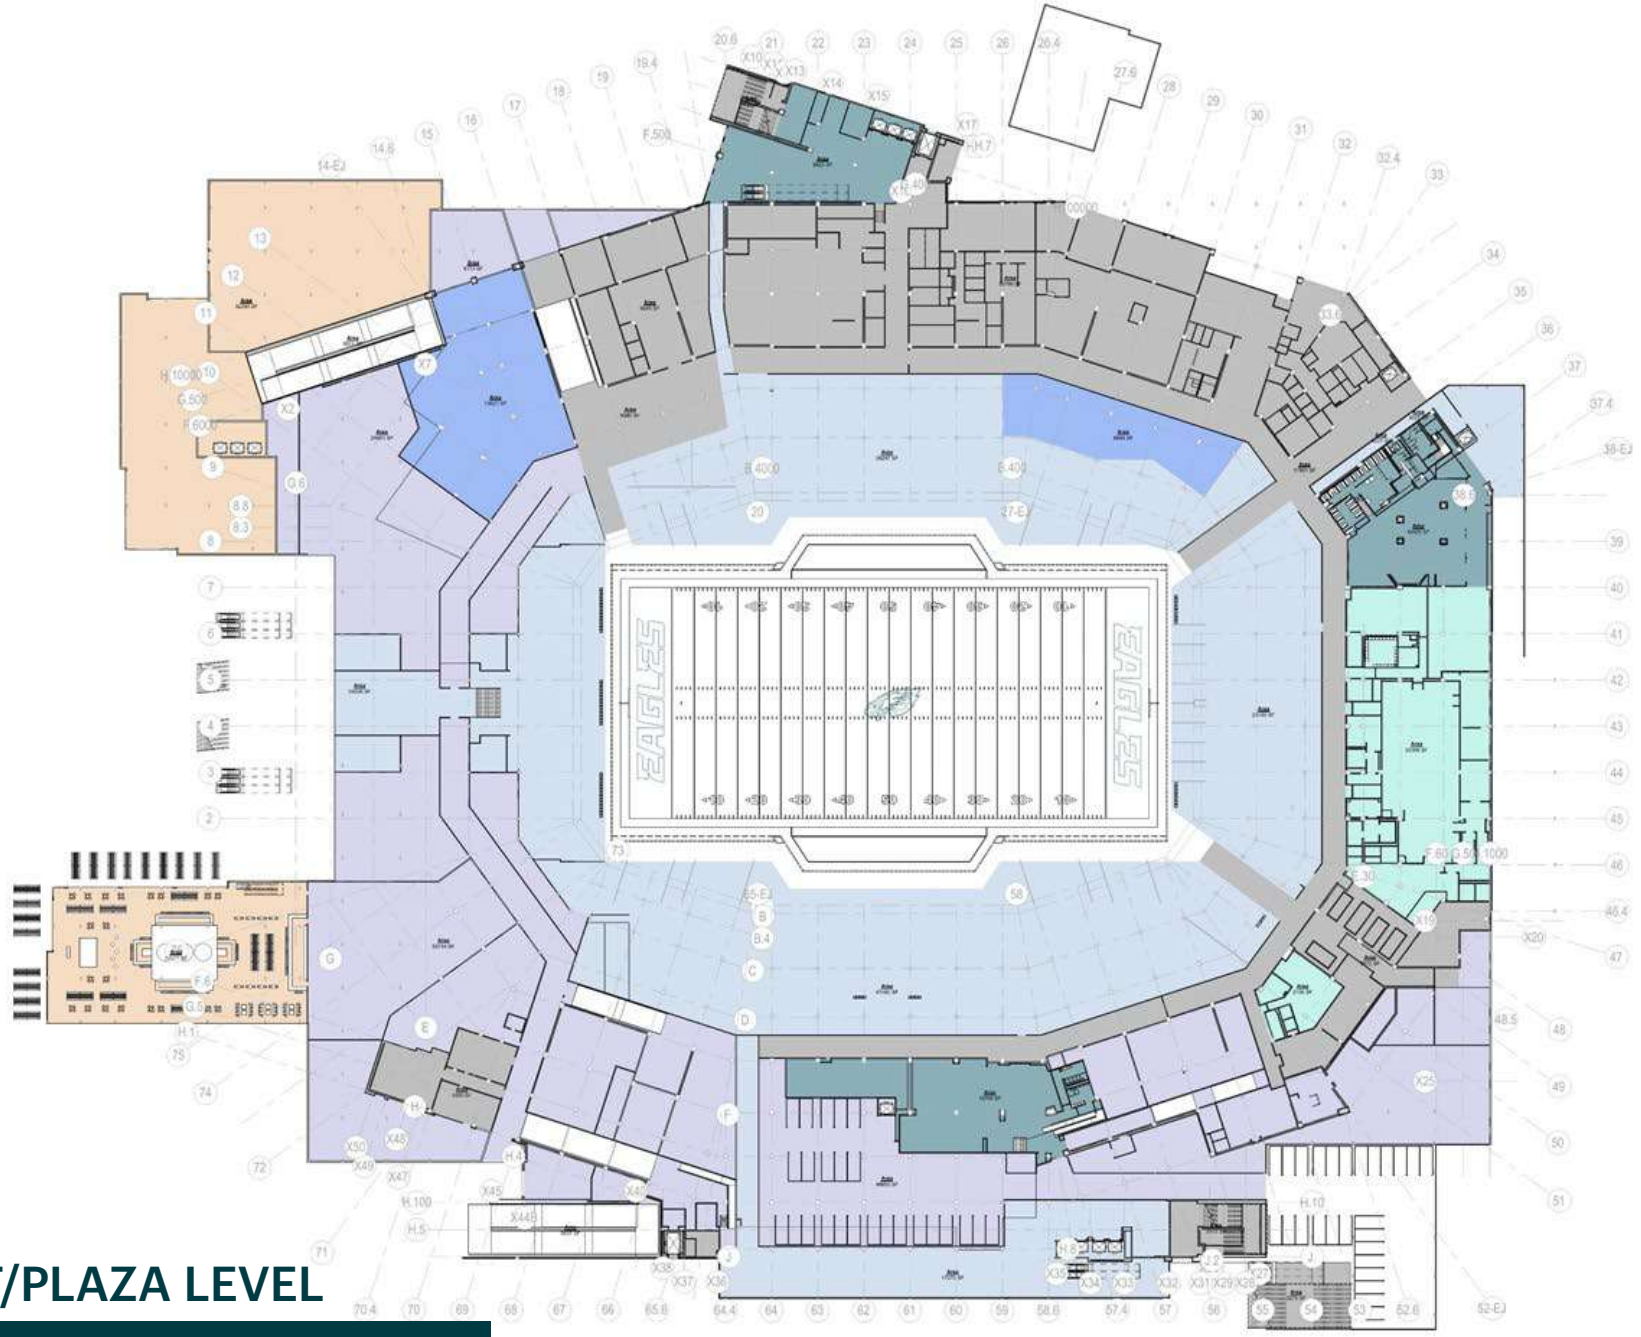

AREA LEGEND

- Existing to Remain
- New Premium
- New BOH
- New GA
- New Aux Lockers
- Premium Refresh
- BOH Refresh
- GA Refresh
- Home Team Refresh


01 Plaza / Event	
Construction Area	Area
Existing to Remain	121758 SF
Home Team Refresh	24565 SF
New Aux Lockers	20230 SF
New BOH	136522 SF
New GA	49470 SF
New Premium	153009 SF
Premium Refresh	29845 SF
Grand total	535399 SF

00/01 **EVENT/PLAZA LEVEL**

LEVELS OF CONSTRUCTION

01 EVENT LEVEL


EXISTING EVENT LEVEL

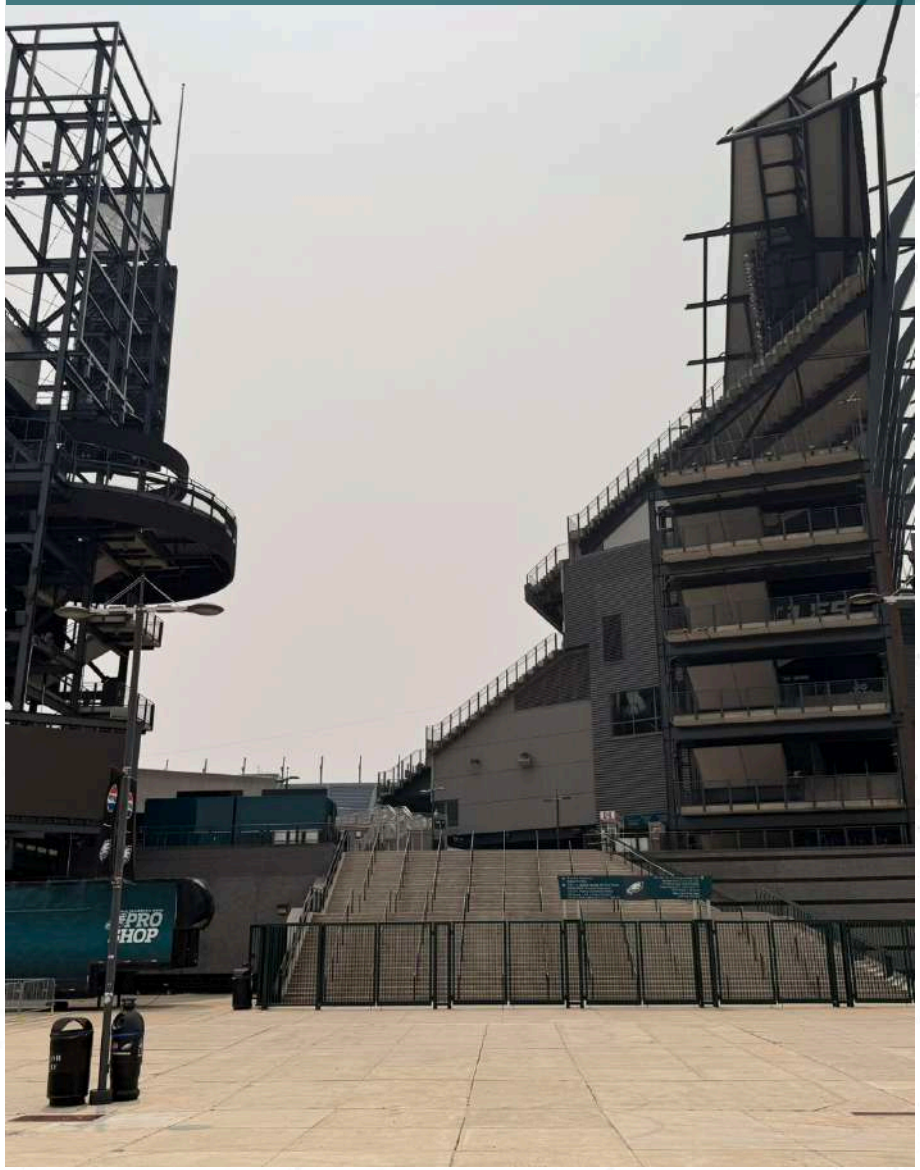

PROPOSED EVENT LEVEL | BEER HALL





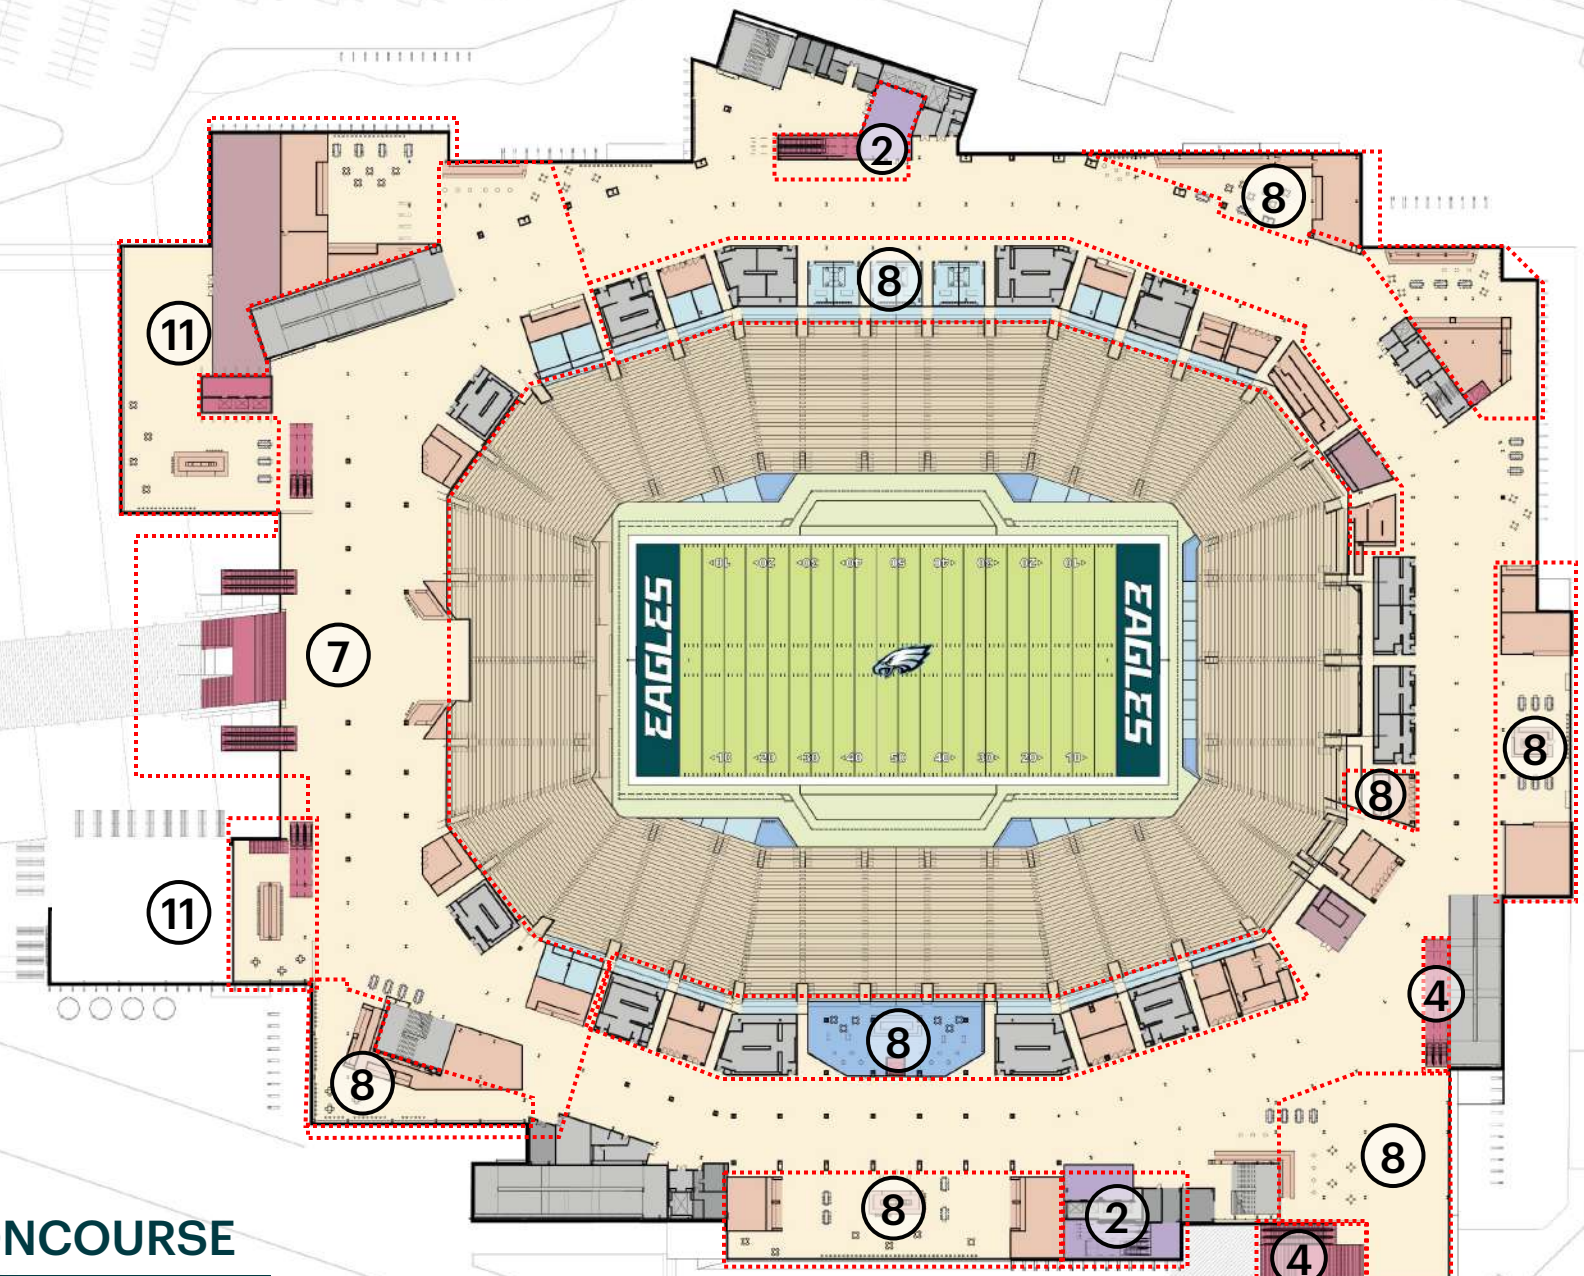


HOME TEAM
OPERATIONS
MEP/BOH
F & B
RETAIL
CLUB
SUITE
CIRCULATION
BOWL
AUXILIARY
VERTICAL CIRC

Note:
All numbers indicated on plans refer to 10-year and 20-year project list at the end of planning section.

02 MAIN CONCOURSE

PROPOSED

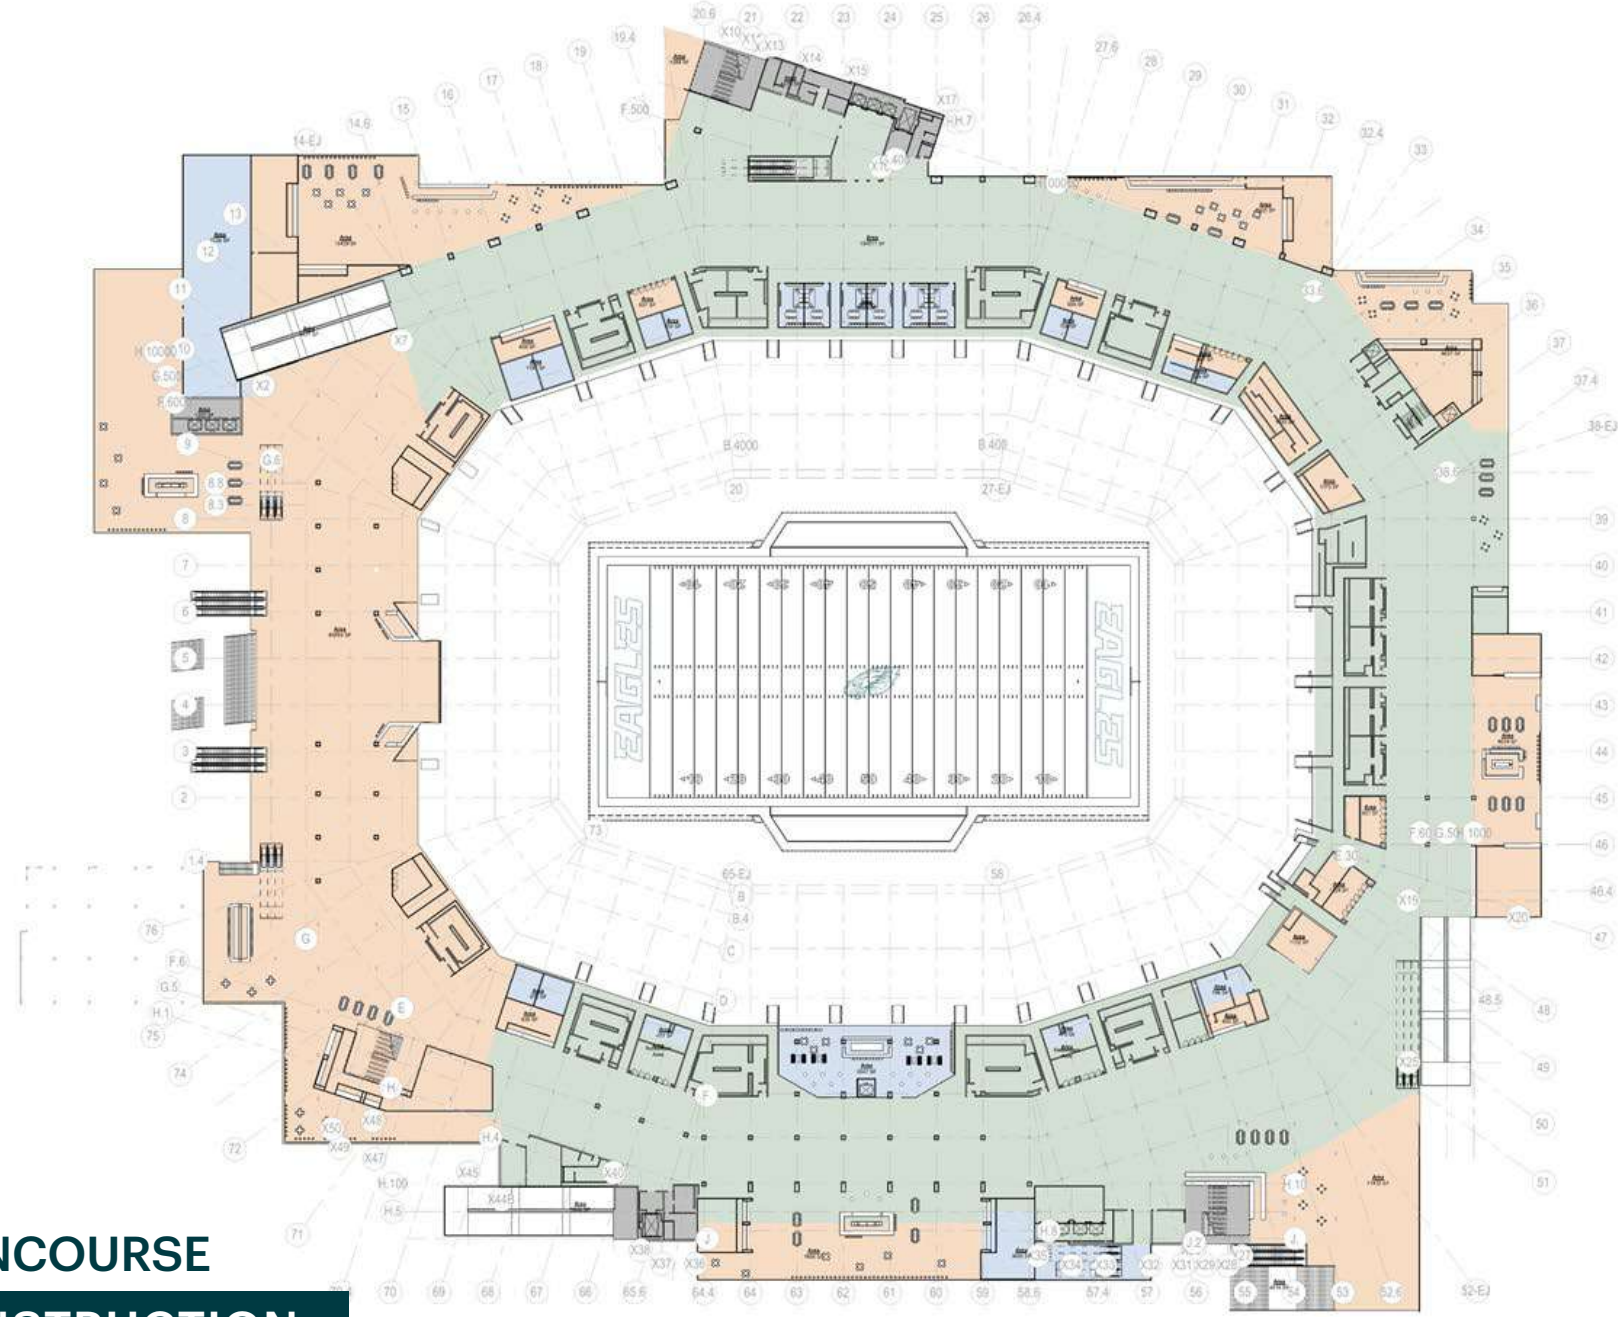

AREA LEGEND

- Existing to Remain
- New Premium
- New BOH
- New GA
- New Aux Lockers
- Premium Refresh
- BOH Refresh
- GA Refresh
- Home Team Refresh


02 Main Concourse	
Construction Area	Area
Existing to Remain	20861 SF
GA Refresh	194511 SF
New GA	161318 SF
New Premium	26051 SF
Grand total	402741 SF

02 MAIN CONCOURSE


LEVELS OF CONSTRUCTION

02 MAIN CONCOURSE

EXISTING MAIN CONCOURSE END ZONE

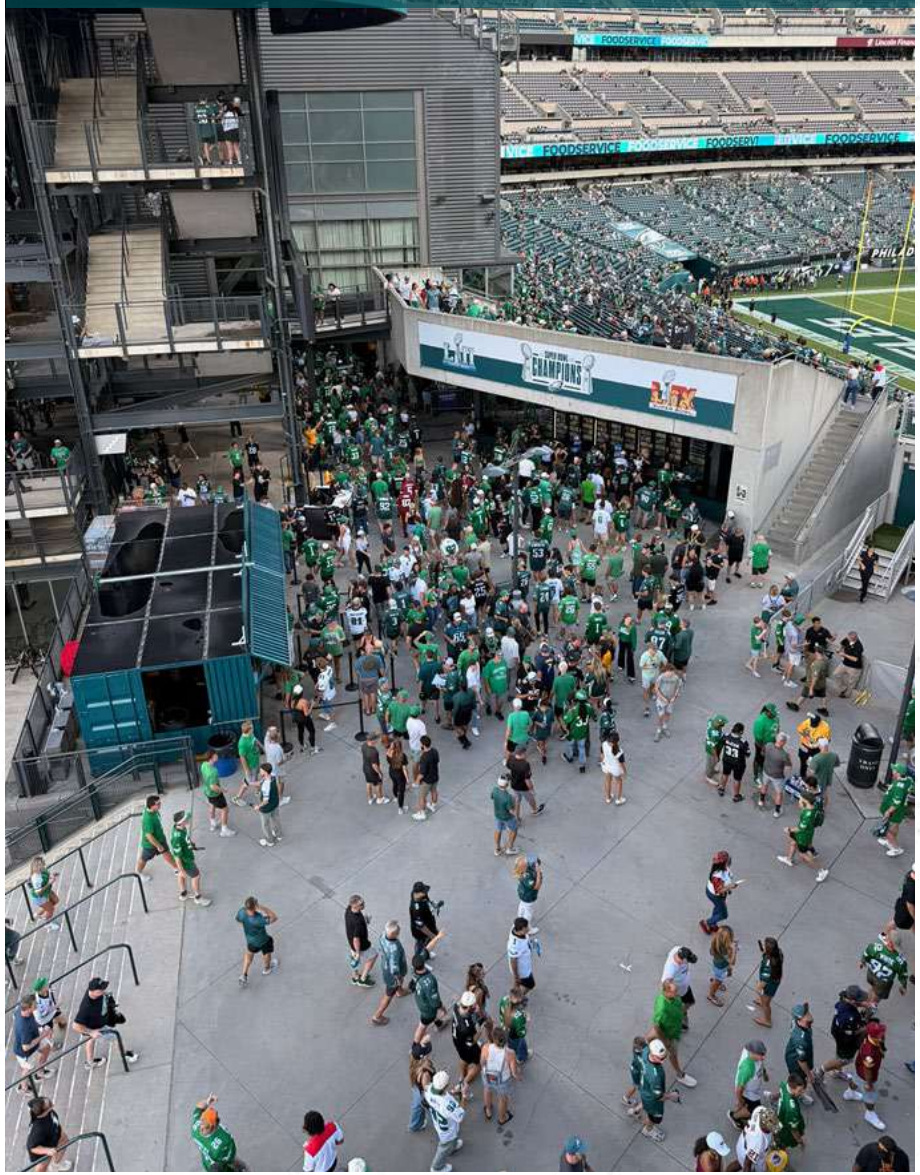


PROPOSED MAIN CONCOURSE | END ZONE

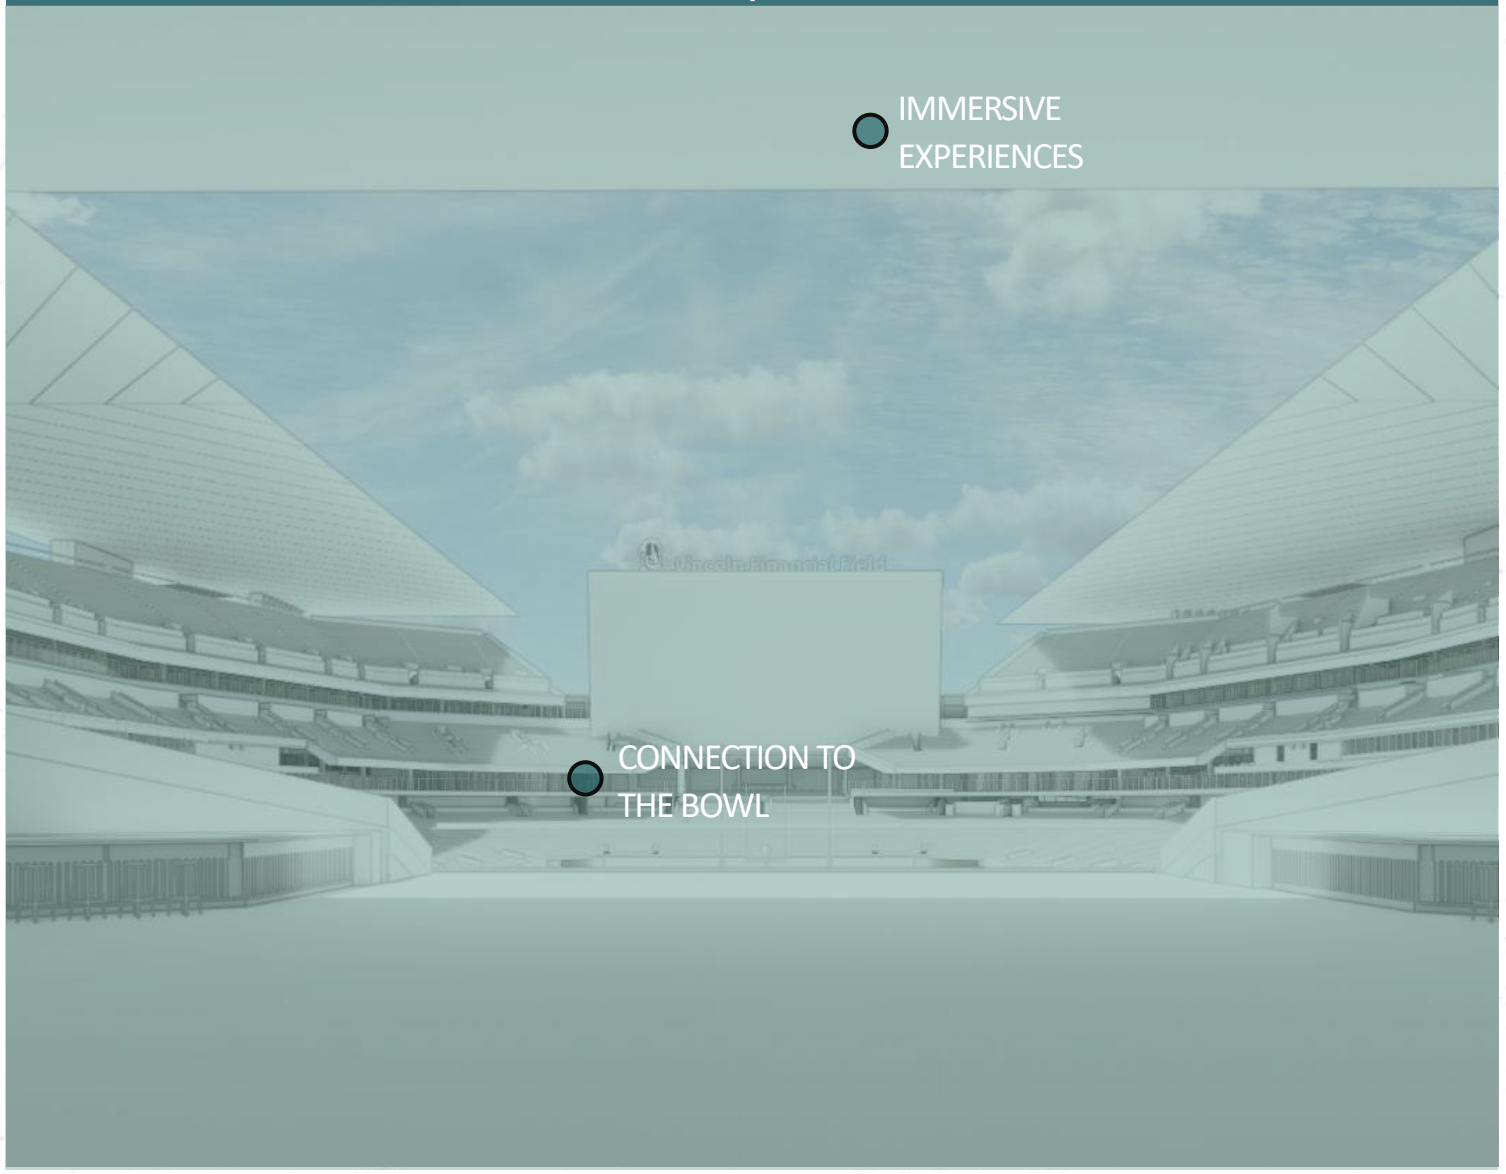

Lincoln Financial Field

02 MAIN CONCOURSE


EXISTING MAIN CONCOURSE

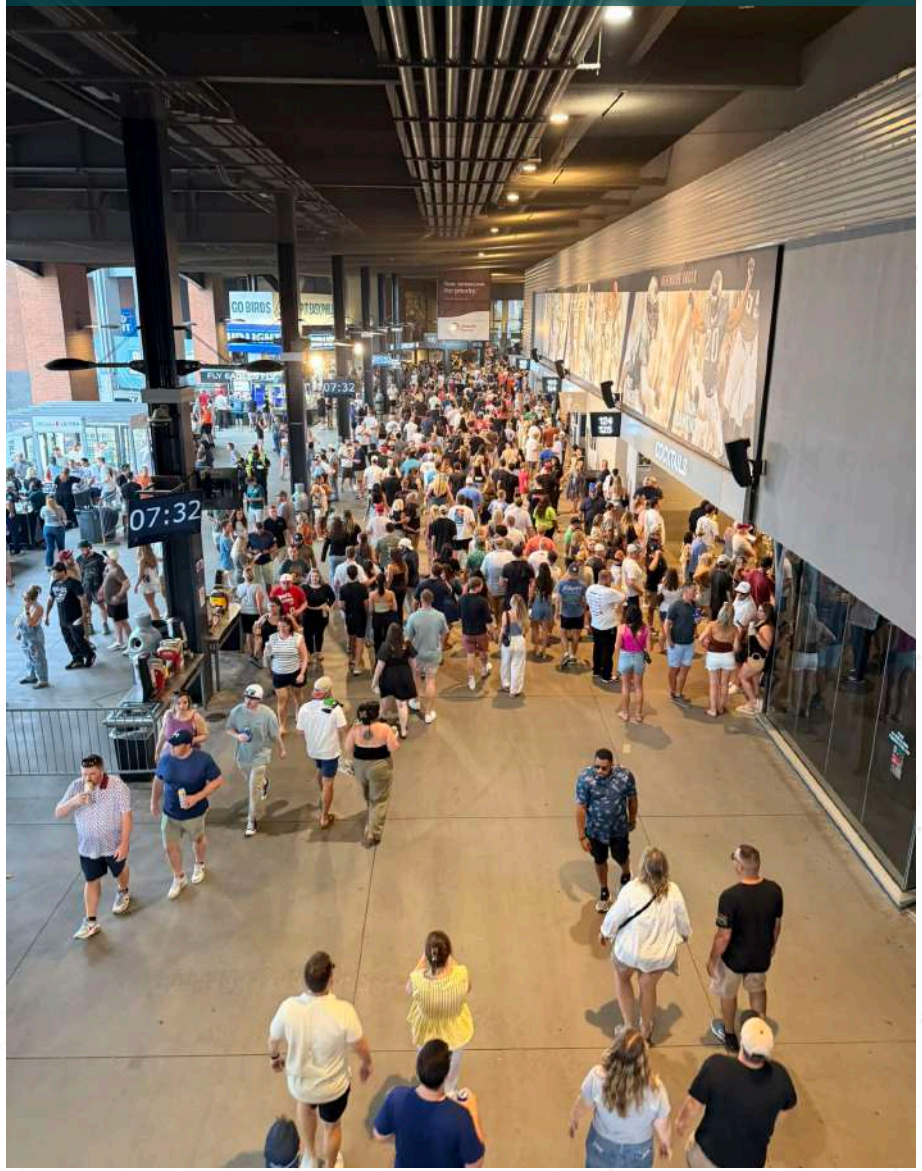

PROPOSED MAIN CONCOURSE | 50 YD LINE





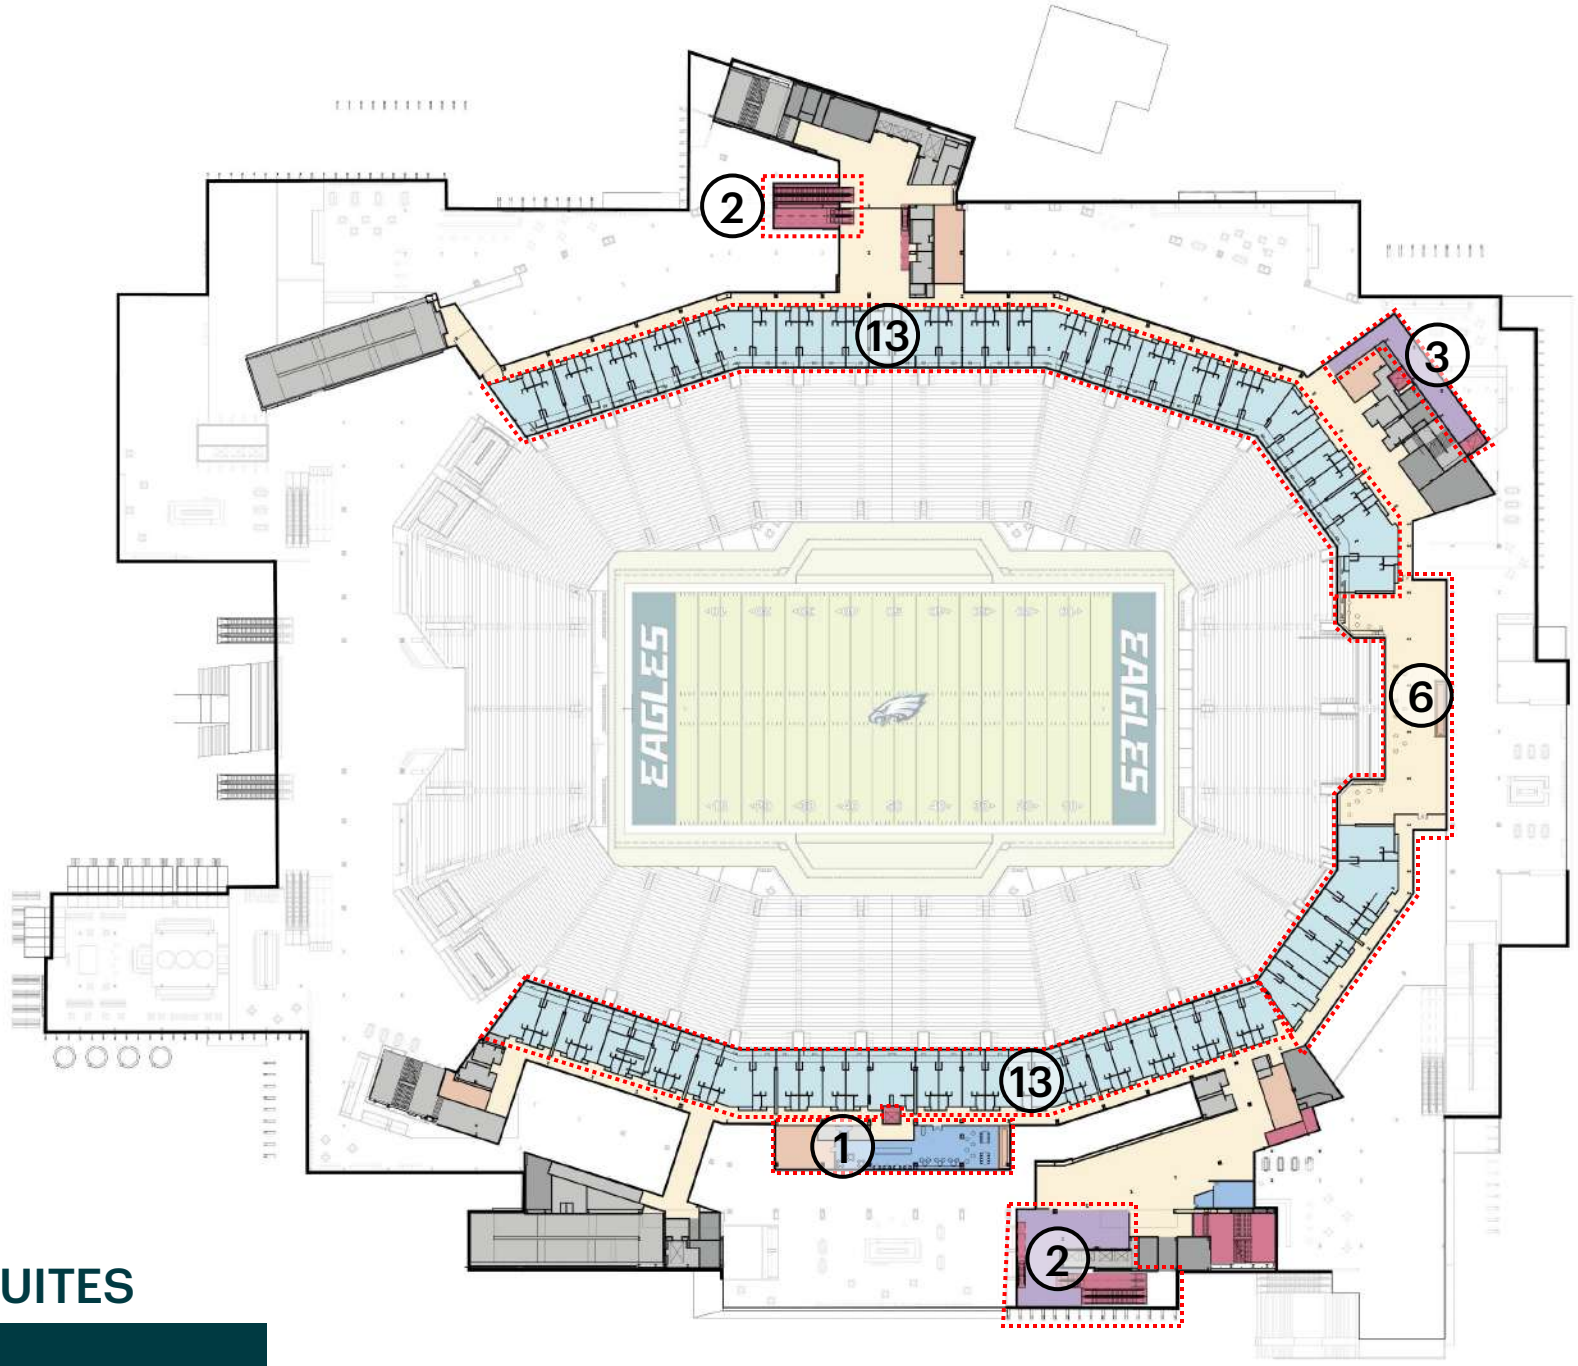


HOME TEAM
OPERATIONS
MEP/BOH
F & B
RETAIL
CLUB
SUITE
CIRCULATION
BOWL
AUXILIARY
VERTICAL CIRC

Note:
All numbers indicated on plans refer to 10-year and 20-year project list at the end of planning section.

03 LOWER SUITES

PROPOSED

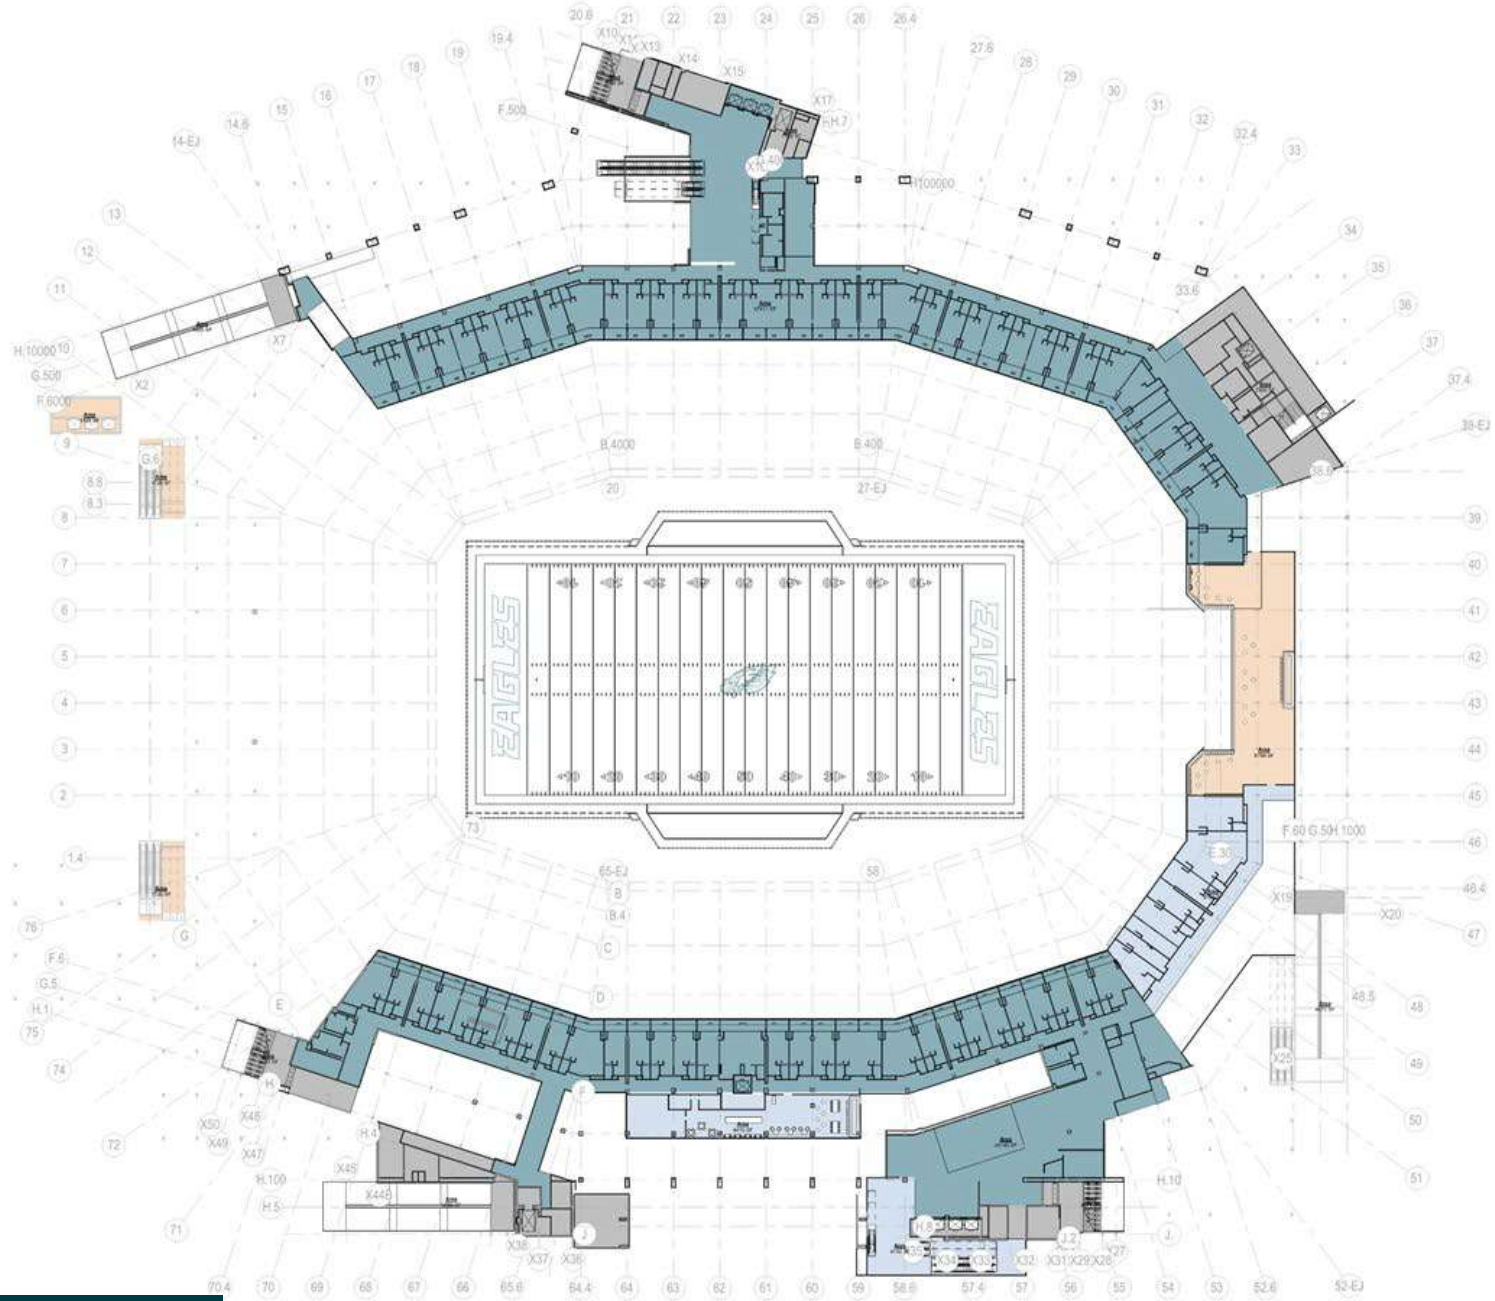

AREA LEGEND


- Existing to Remain
- New Premium
- New BOH
- New GA
- New Aux Lockers
- Premium Refresh
- BOH Refresh
- GA Refresh
- Home Team Refresh

03 Lower Suites	
Construction Area	Area

Existing to Remain	36272 SF
New GA	13378 SF
New Premium	17122 SF
Premium Refresh	92551 SF
Grand total	159323 SF

03 LOWER SUITES

LEVELS OF CONSTRUCTION

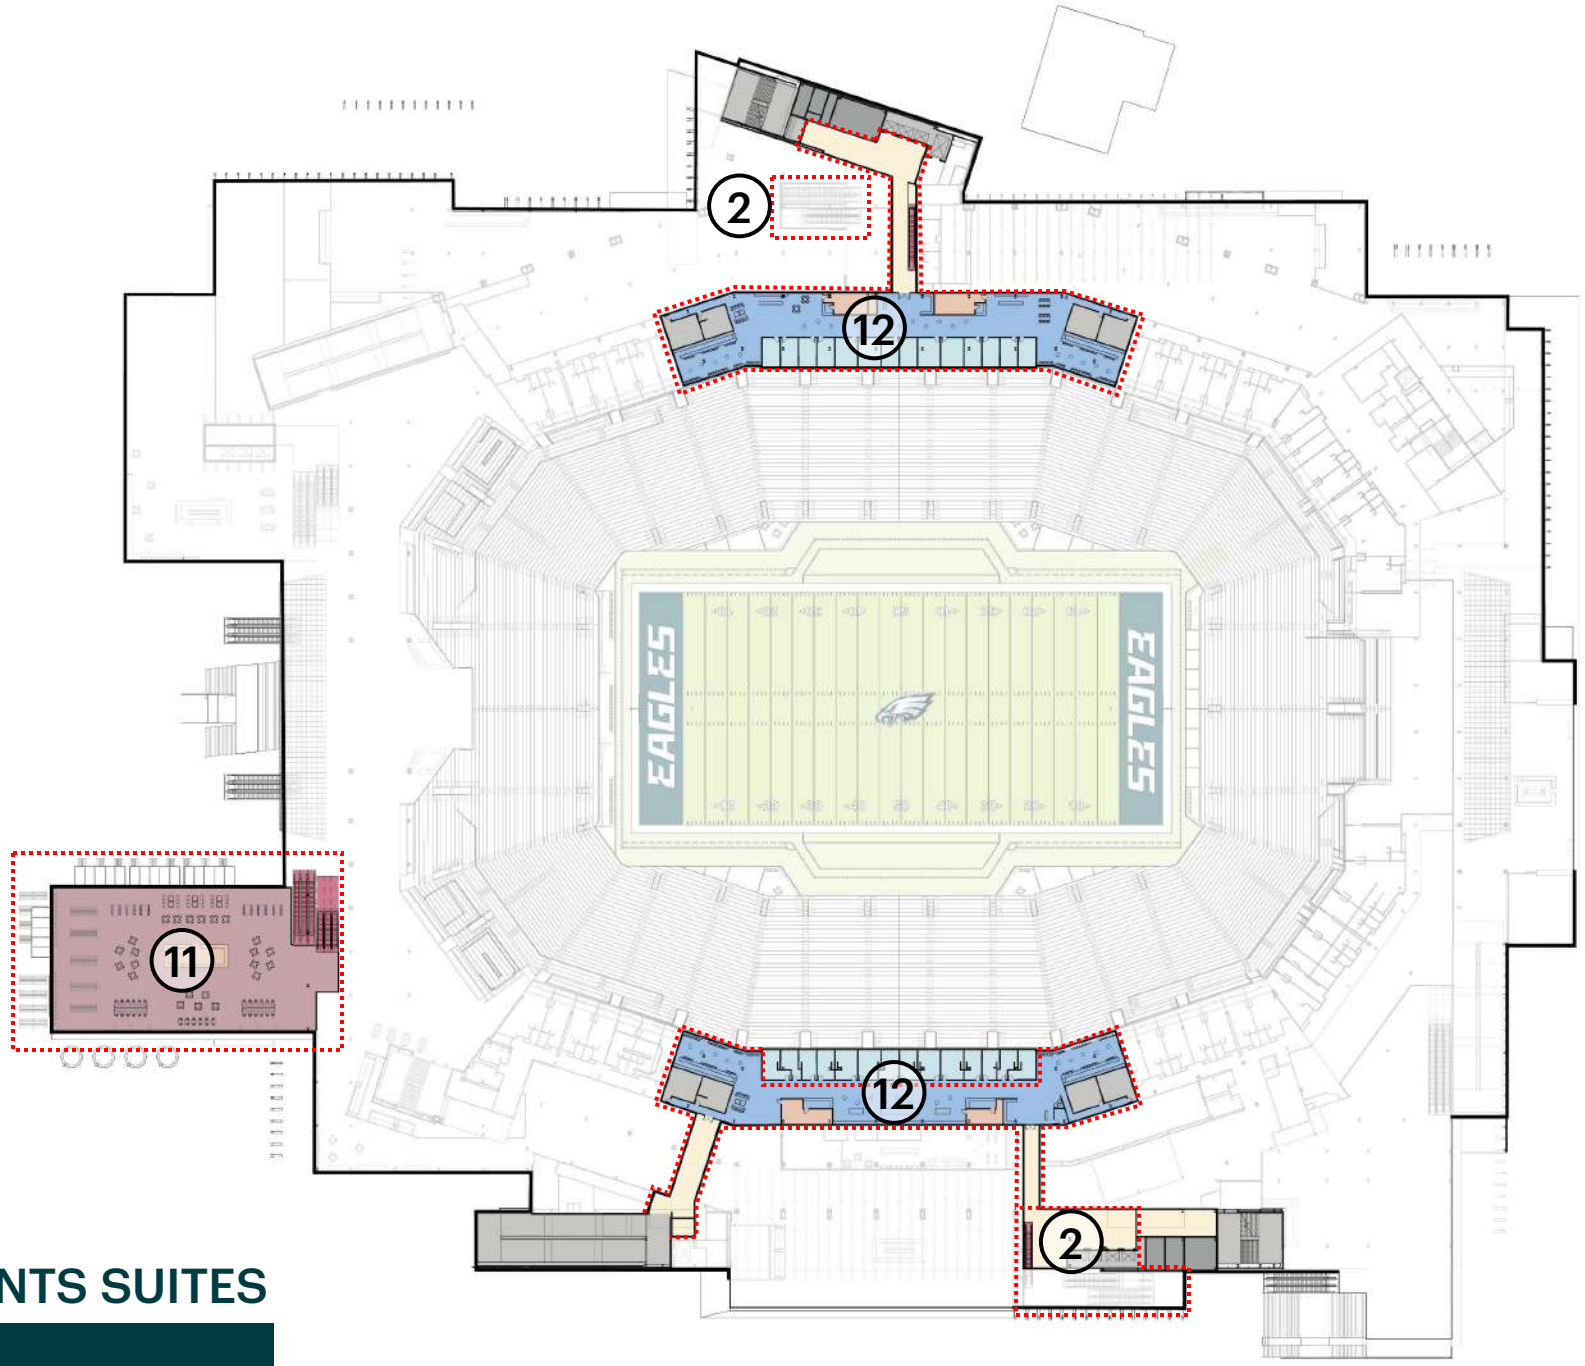


HOME TEAM
OPERATIONS
MEP/BOH
F & B
RETAIL
CLUB
SUITE
CIRCULATION
BOWL
AUXILIARY
VERTICAL CIRC

04 PRESIDENTS SUITES

PROPOSED

Note:
All numbers indicated on plans refer to 10-year and 20-year project list at the end of planning section.

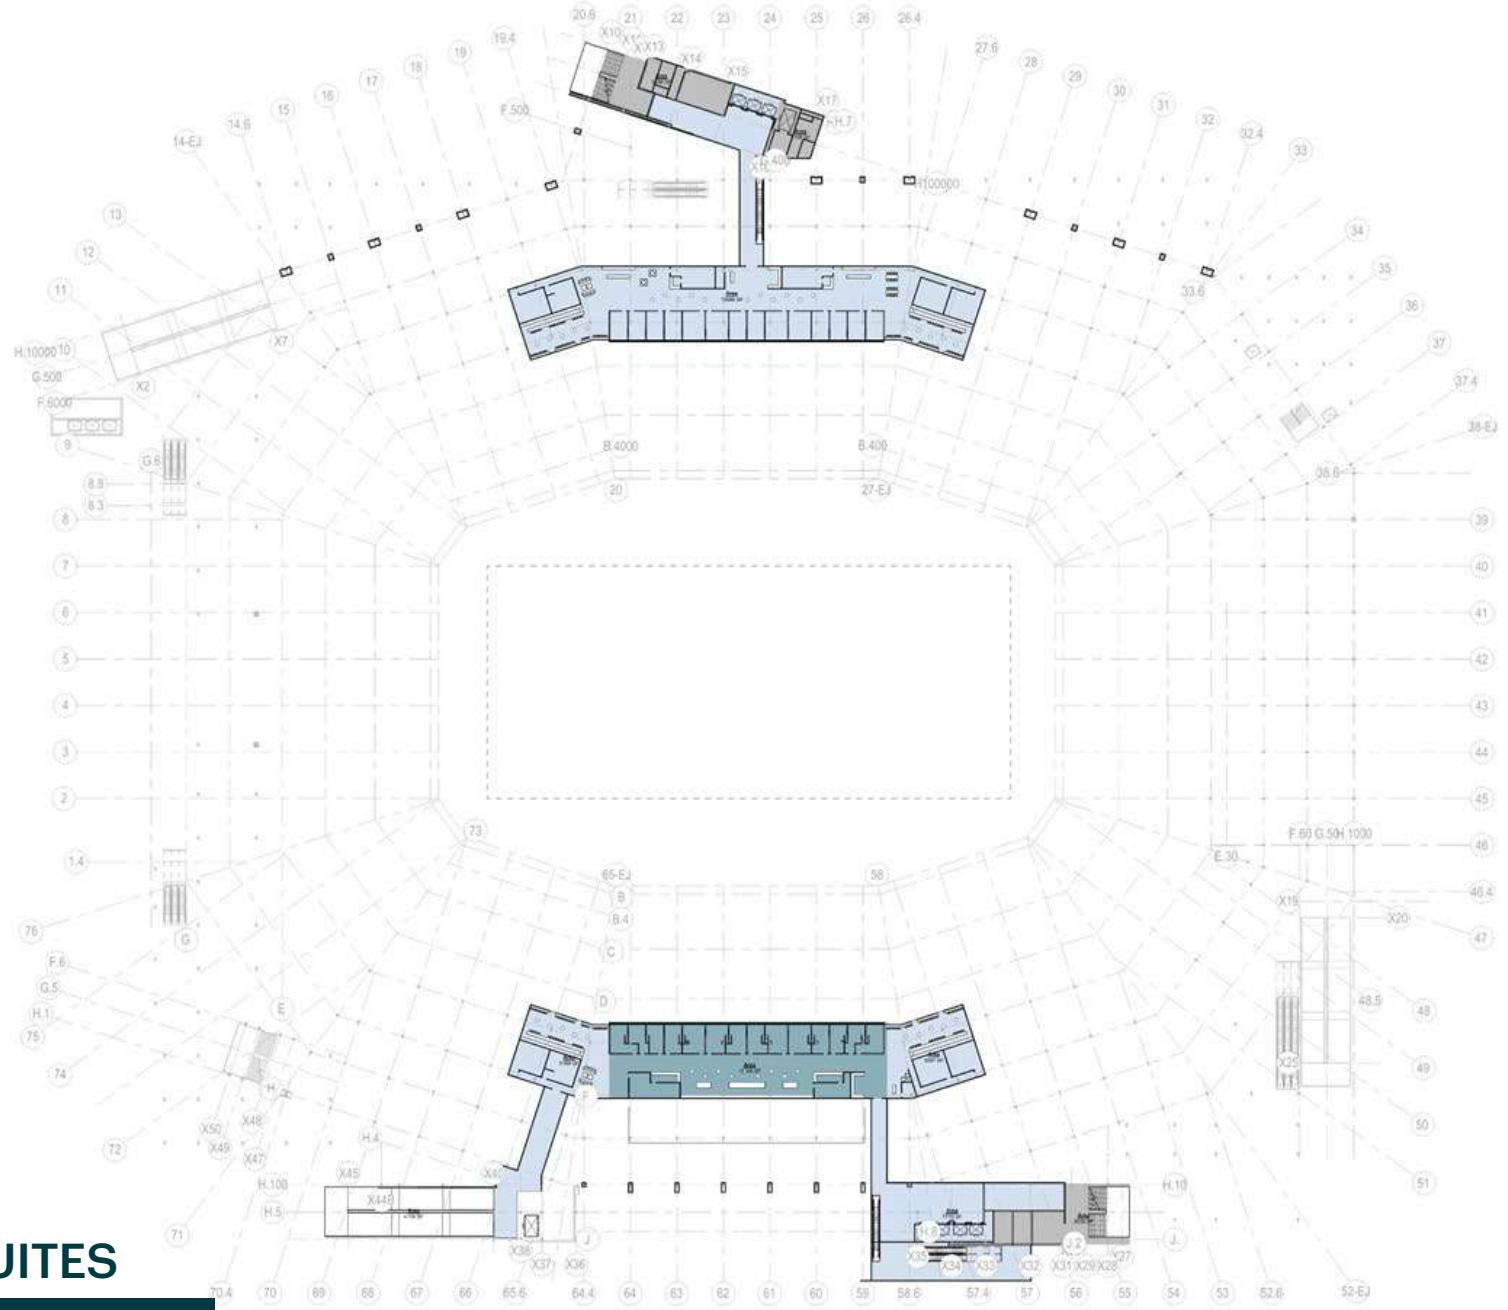


AREA LEGEND

- Existing to Remain
- New Premium
- New BOH
- New GA
- New Aux Lockers
- Premium Refresh
- BOH Refresh
- GA Refresh
- Home Team Refresh

04 President Suites	
Construction Area	Area
Existing to Remain	11441 SF
New Premium	35716 SF
Premium Refresh	10106 SF
Grand total	57262 SF

04 PRESIDENTS SUITES

LEVELS OF CONSTRUCTION

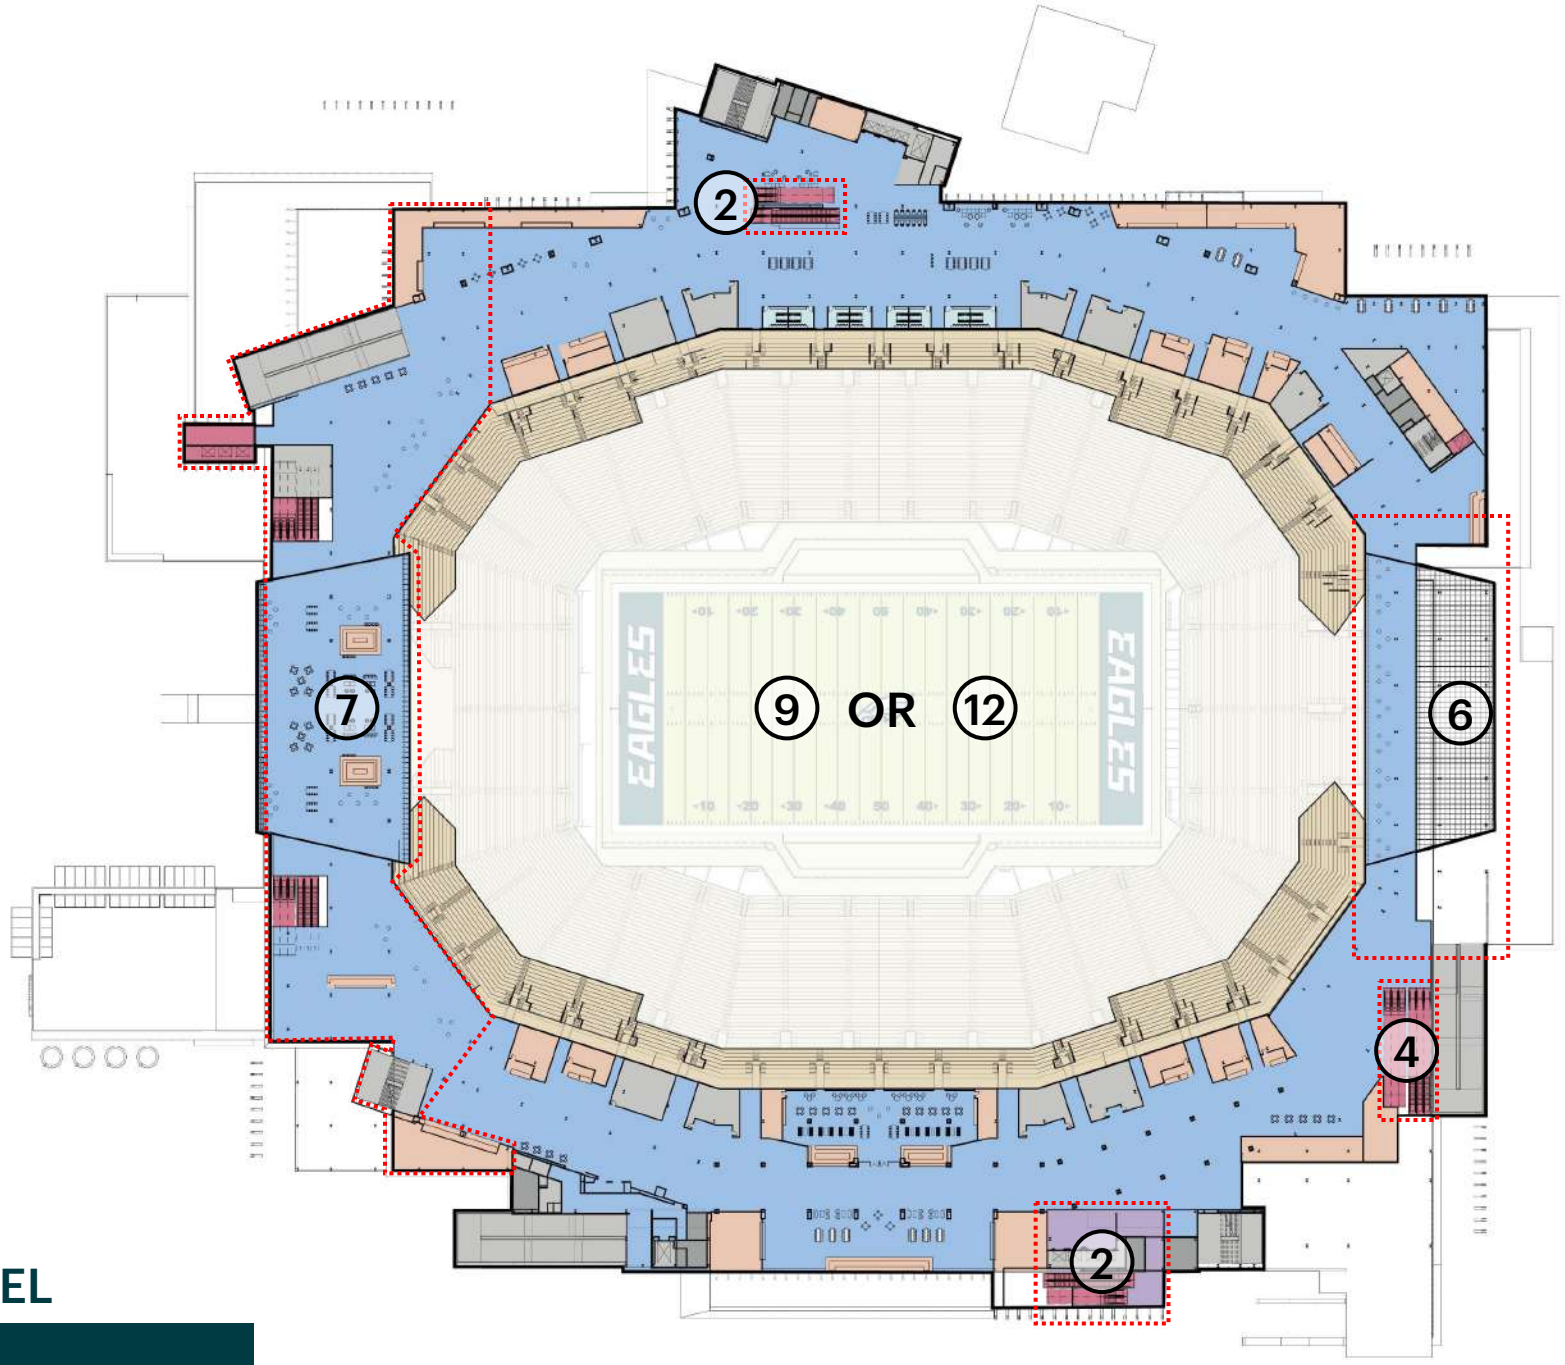


HOME TEAM
OPERATIONS
MEP/BOH
F & B
RETAIL
CLUB
SUITE
CIRCULATION
BOWL
AUXILIARY
VERTICAL CIRC

Note:
All numbers indicated on plans refer to 10-year and 20-year project list at the end of planning section.

05 CLUB LEVEL

PROPOSED

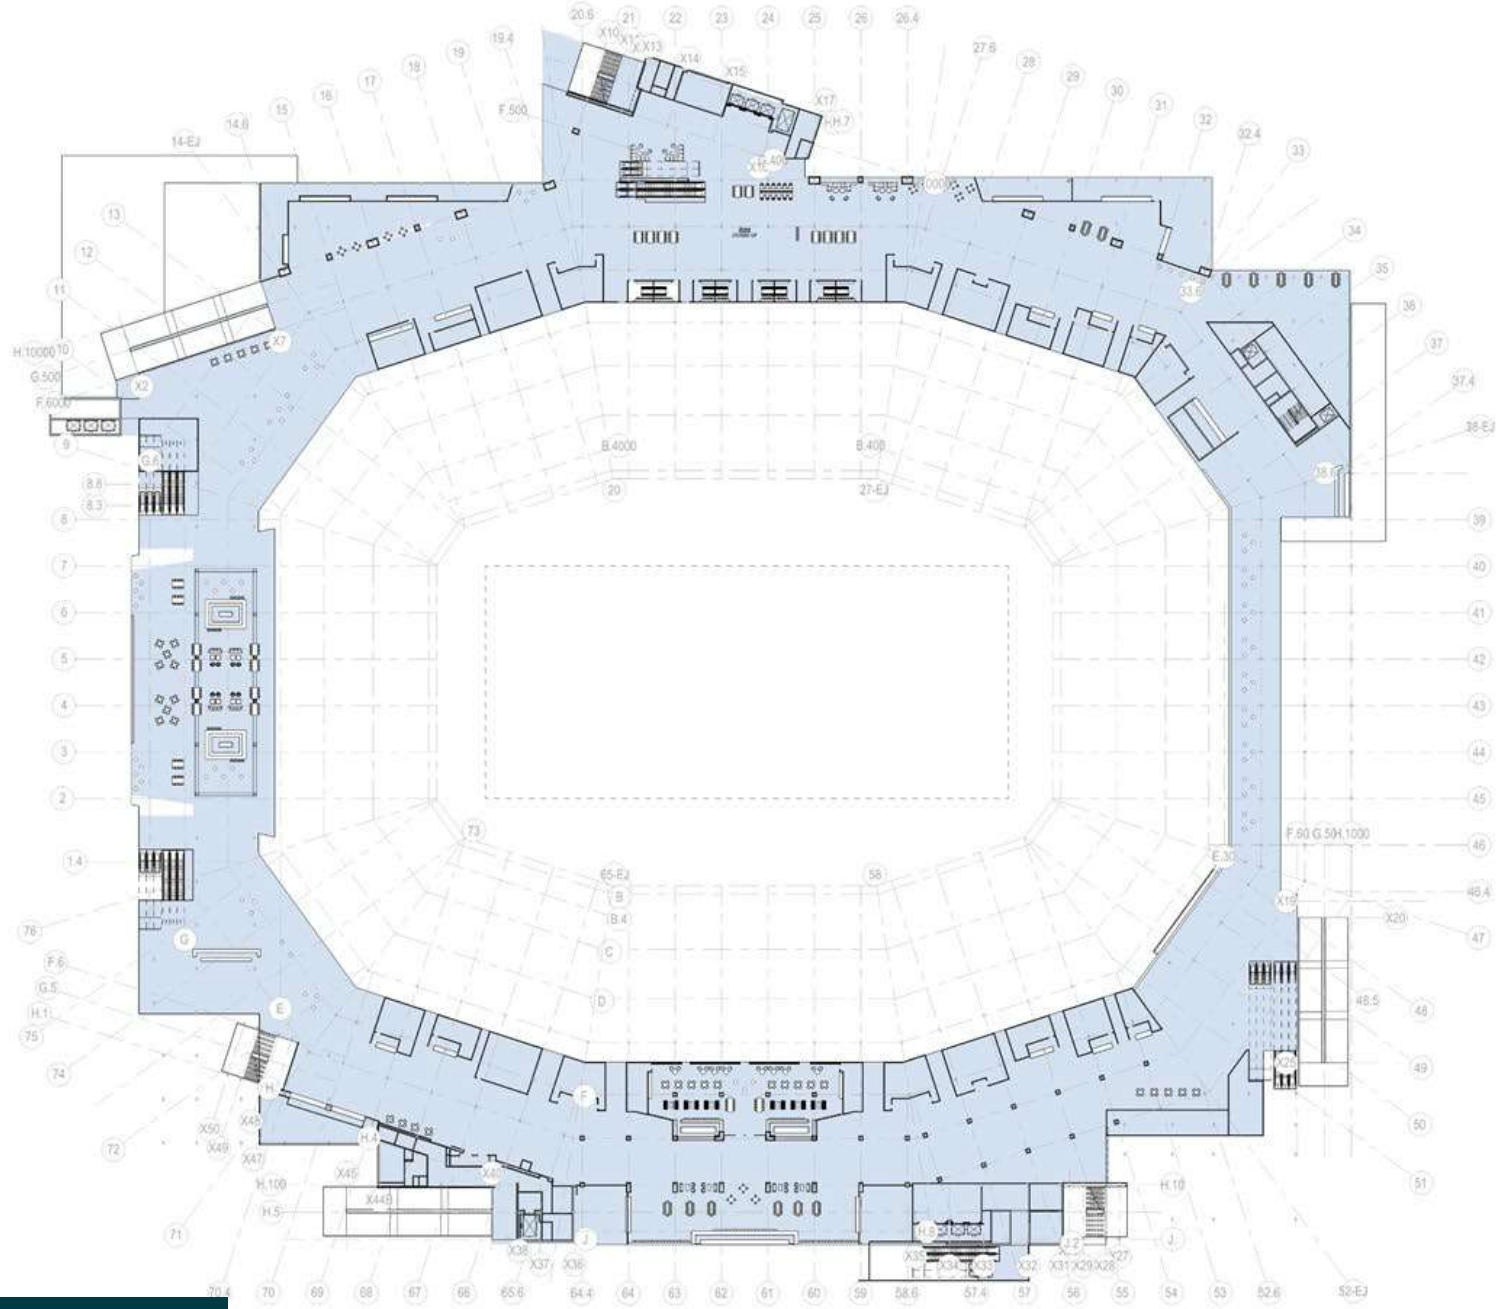

AREA LEGEND

- Existing to Remain
- New Premium
- New BOH
- New GA
- New Aux Lockers
- Premium Refresh
- BOH Refresh
- GA Refresh
- Home Team Refresh

05 Club Level	
Construction Area	Area
New Premium	250888 SF
Grand total	250888 SF

05 CLUB LEVEL

LEVELS OF CONSTRUCTION

05 CLUB LEVEL

CLUB








05 **CLUB LEVEL**


EXISTING CLUB LEVEL

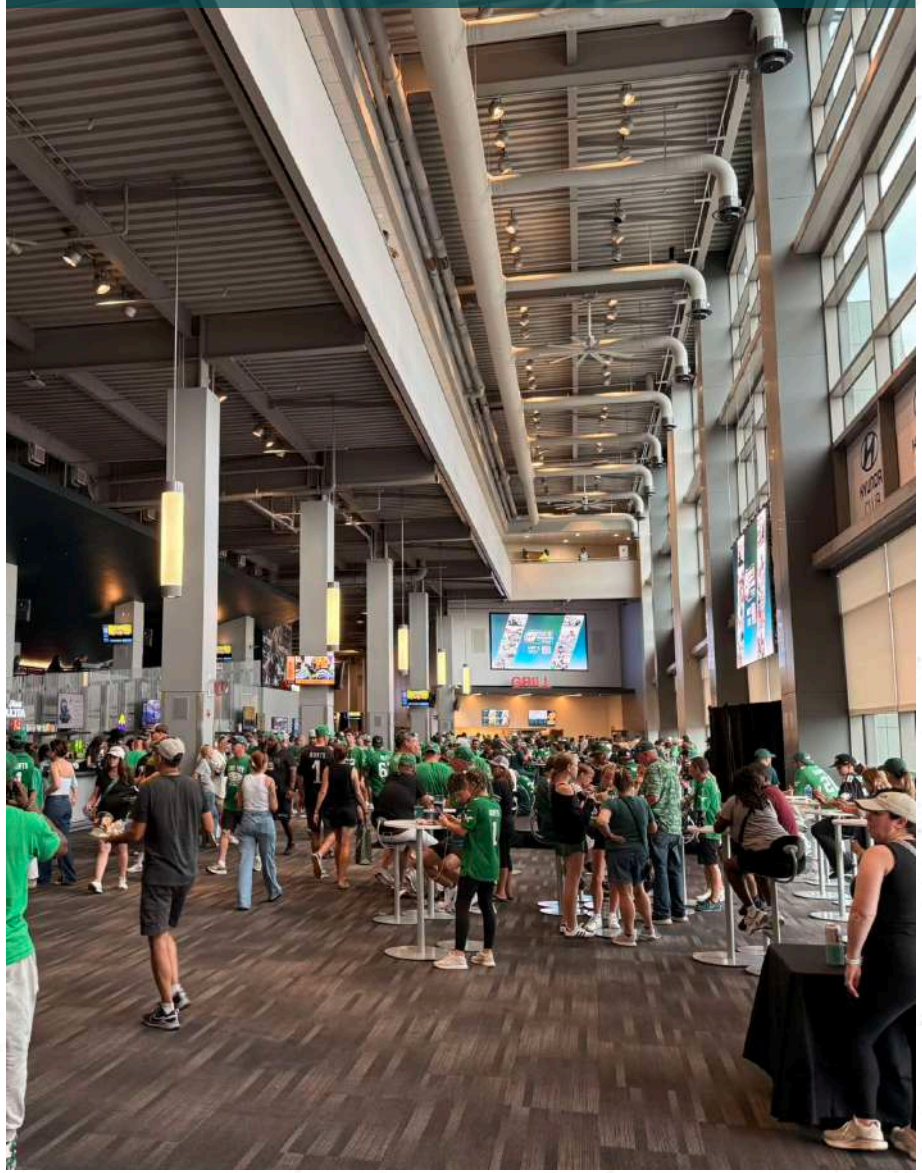

PROPOSED CLUB LEVEL| 50 YD LINE





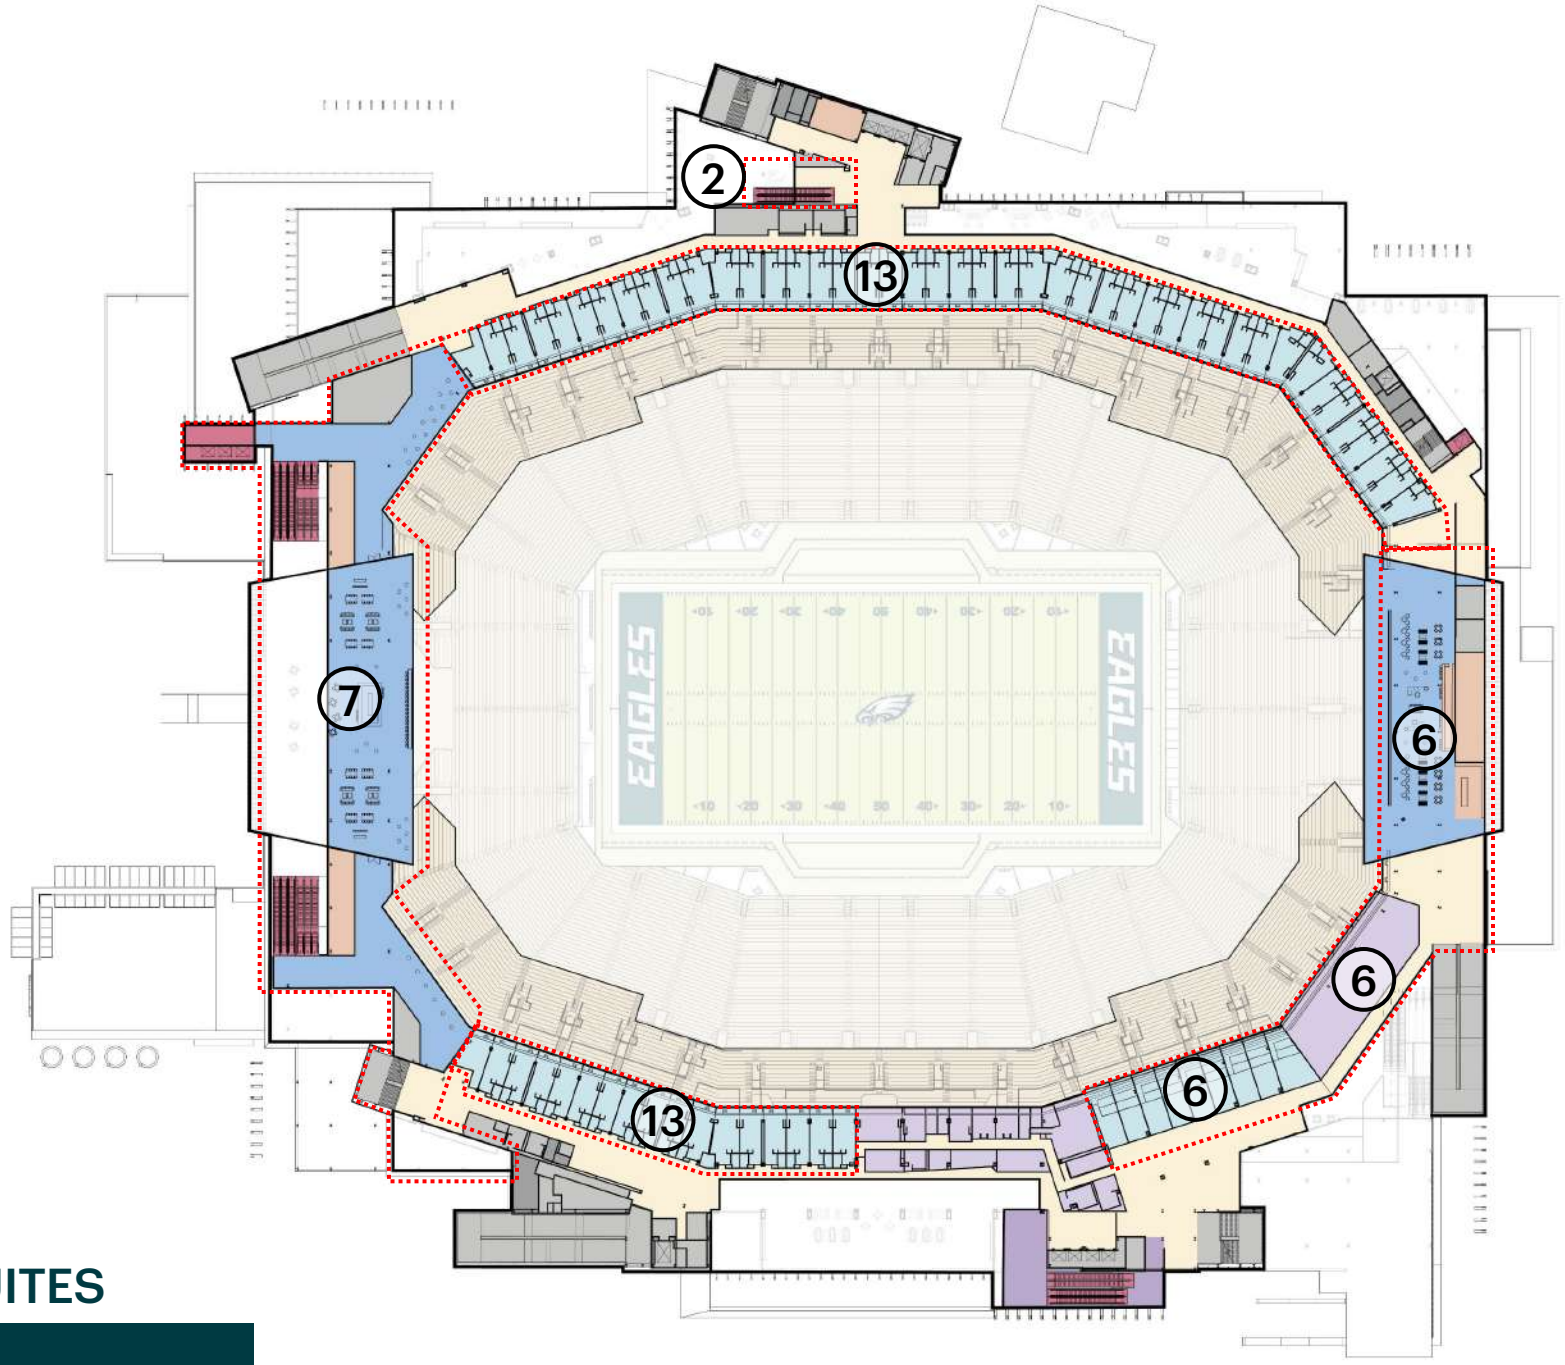


HOME TEAM
OPERATIONS
MEP/BOH
F & B
RETAIL
CLUB
SUITE
CIRCULATION
BOWL
AUXILIARY
VERTICAL CIRC

06 UPPER SUITES

PROPOSED

Note:
All numbers indicated on plans refer to 10-year and 20-year project list at the end of planning section.

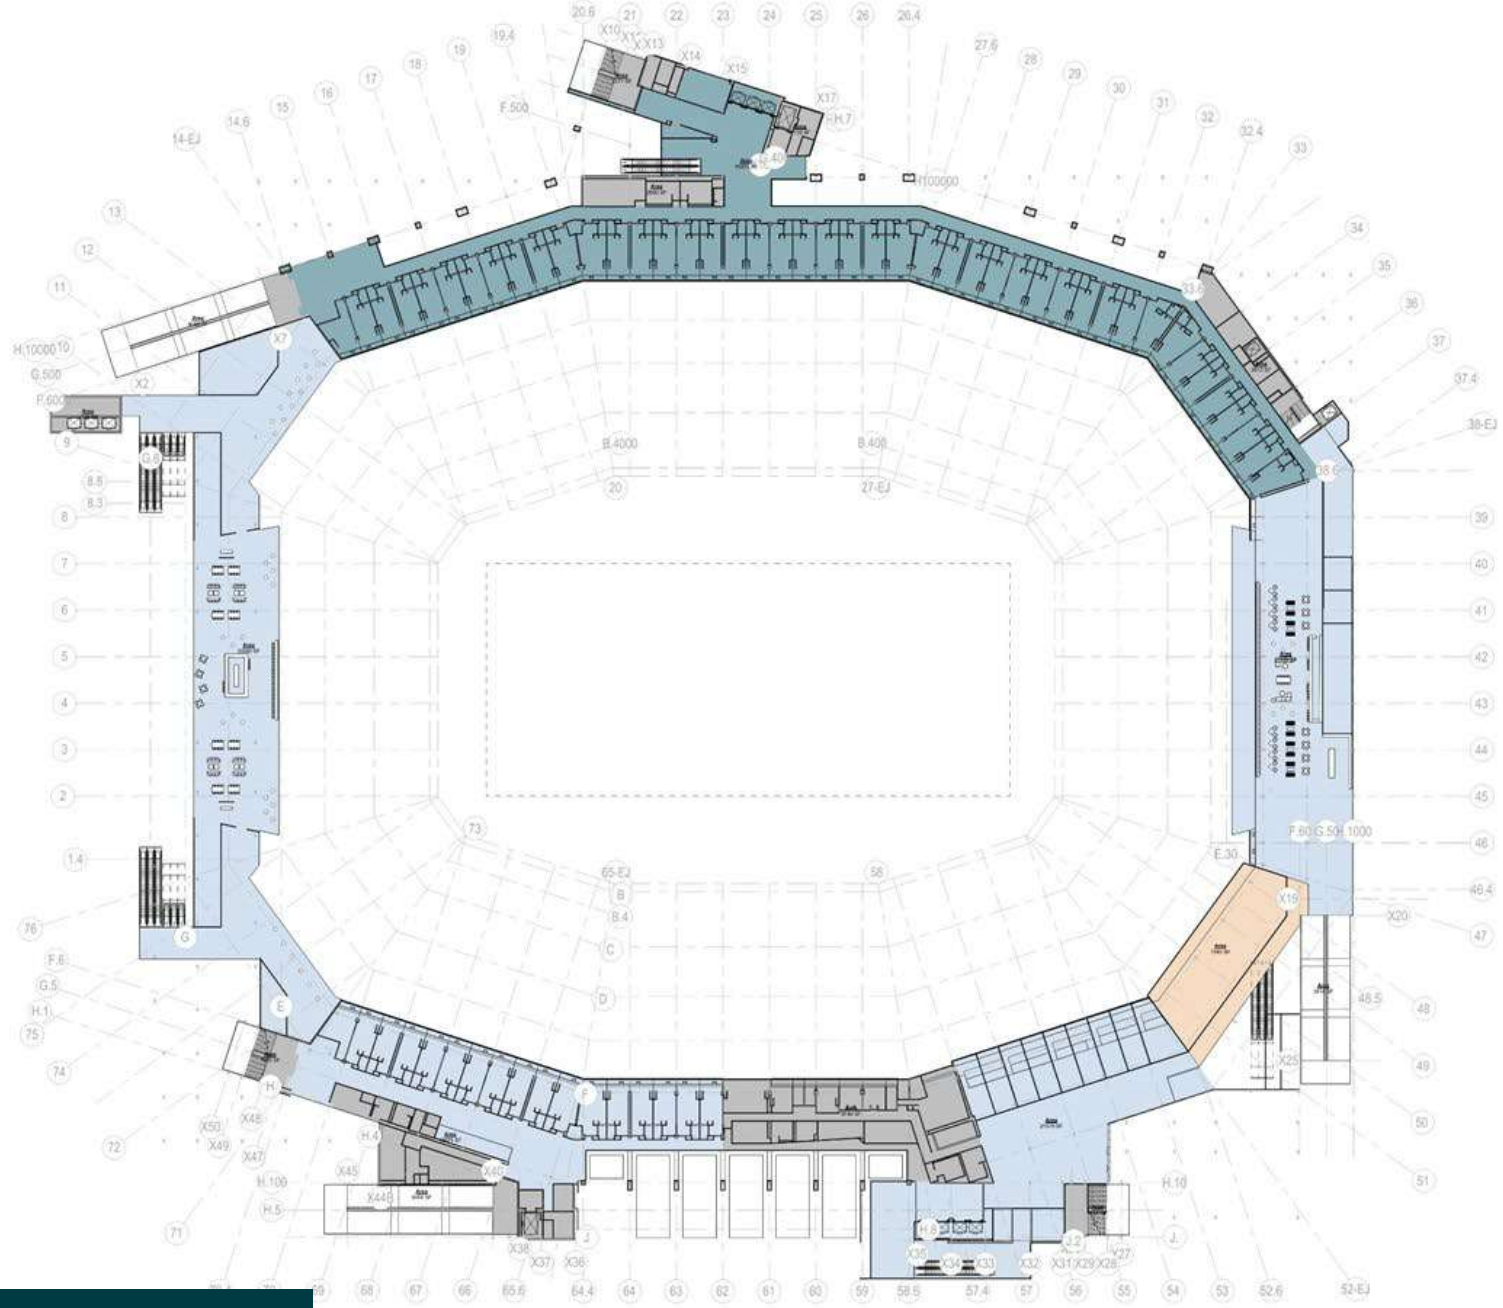


AREA LEGEND

- Existing to Remain
- New Premium
- New BOH
- New GA
- New Aux Lockers
- Premium Refresh
- BOH Refresh
- GA Refresh
- Home Team Refresh

06 Upper Suites	
Construction Area	Area
Existing to Remain	40244 SF
New GA	7343 SF
New Premium	93199 SF
Premium Refresh	45301 SF
Grand total	186088 SF

06 UPPER SUITES

LEVELS OF CONSTRUCTION

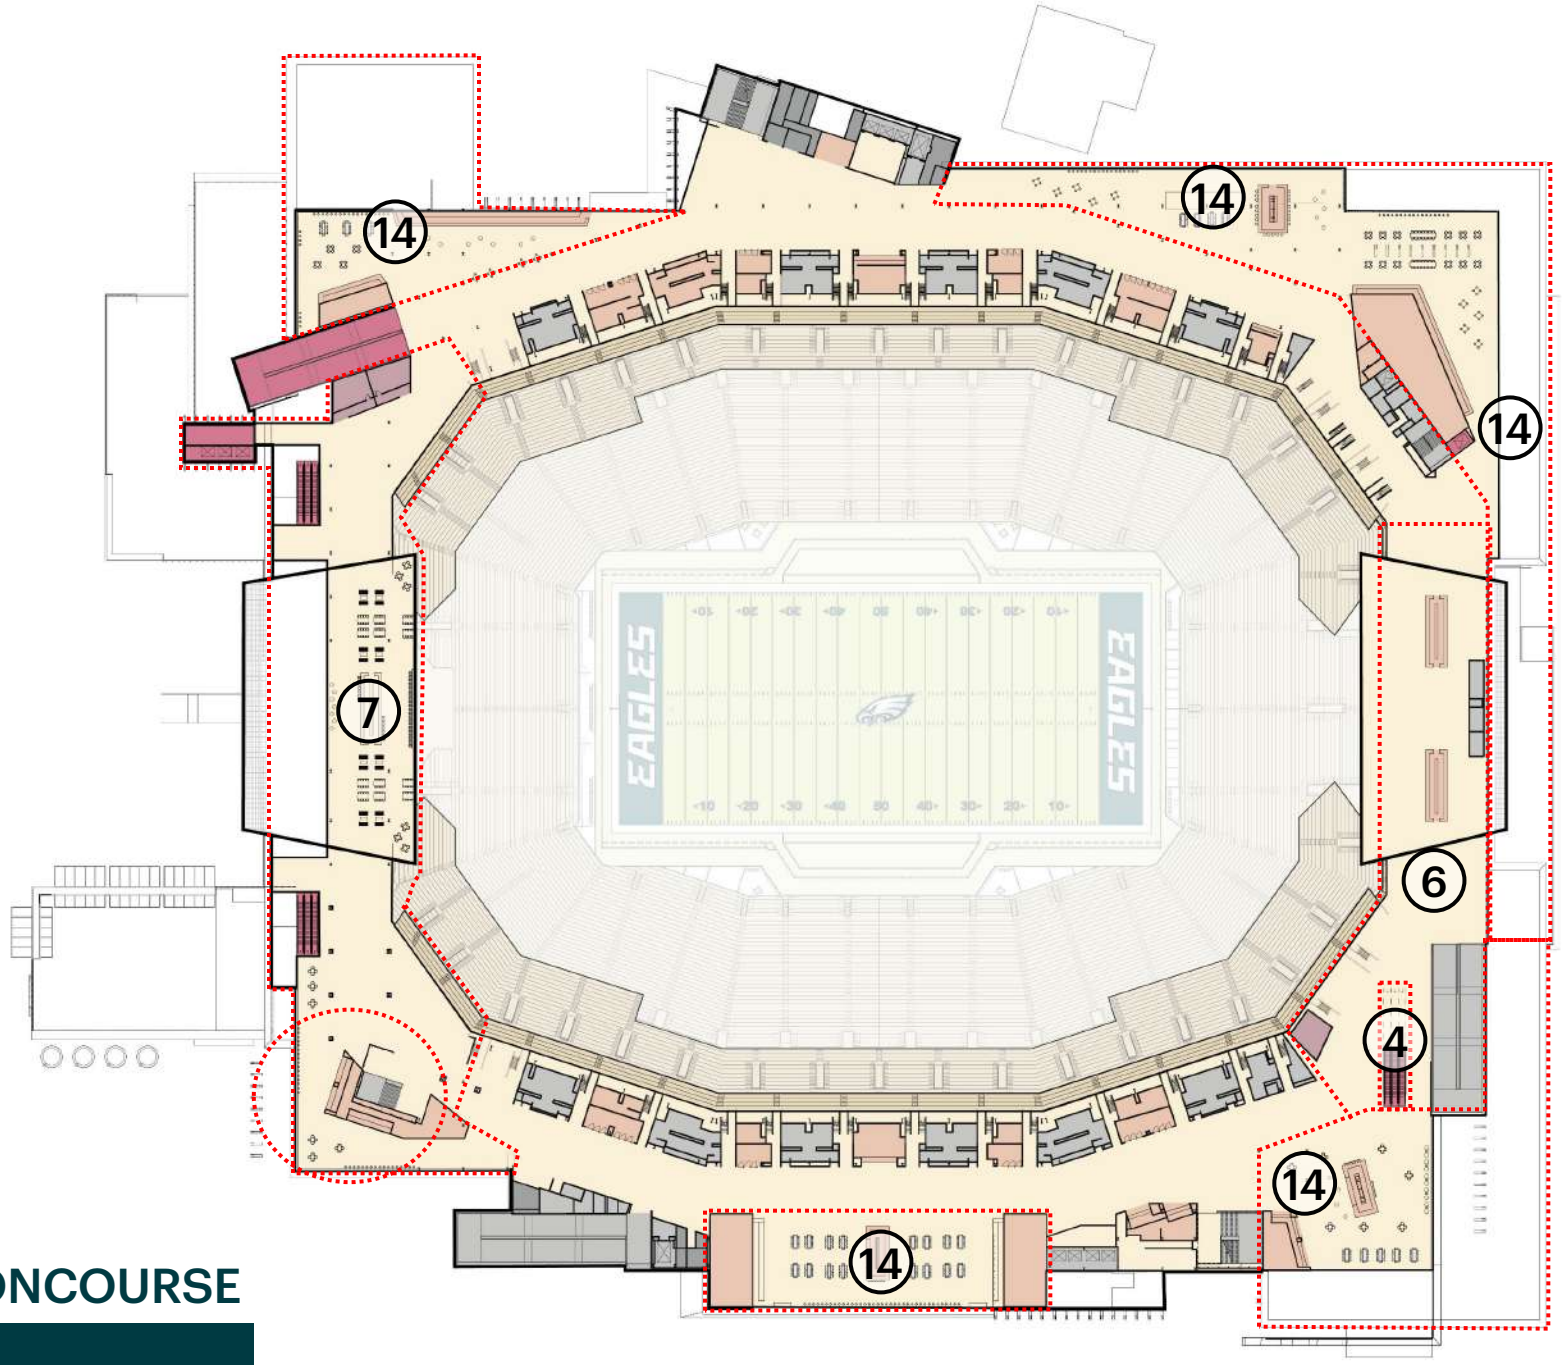


HOME TEAM
OPERATIONS
MEP/BOH
F & B
RETAIL
CLUB
SUITE
CIRCULATION
BOWL
AUXILIARY
VERTICAL CIRC

07 UPPER CONCOURSE

PROPOSED

Note:
All numbers indicated on plans refer to 10-year and 20-year project list at the end of planning section.

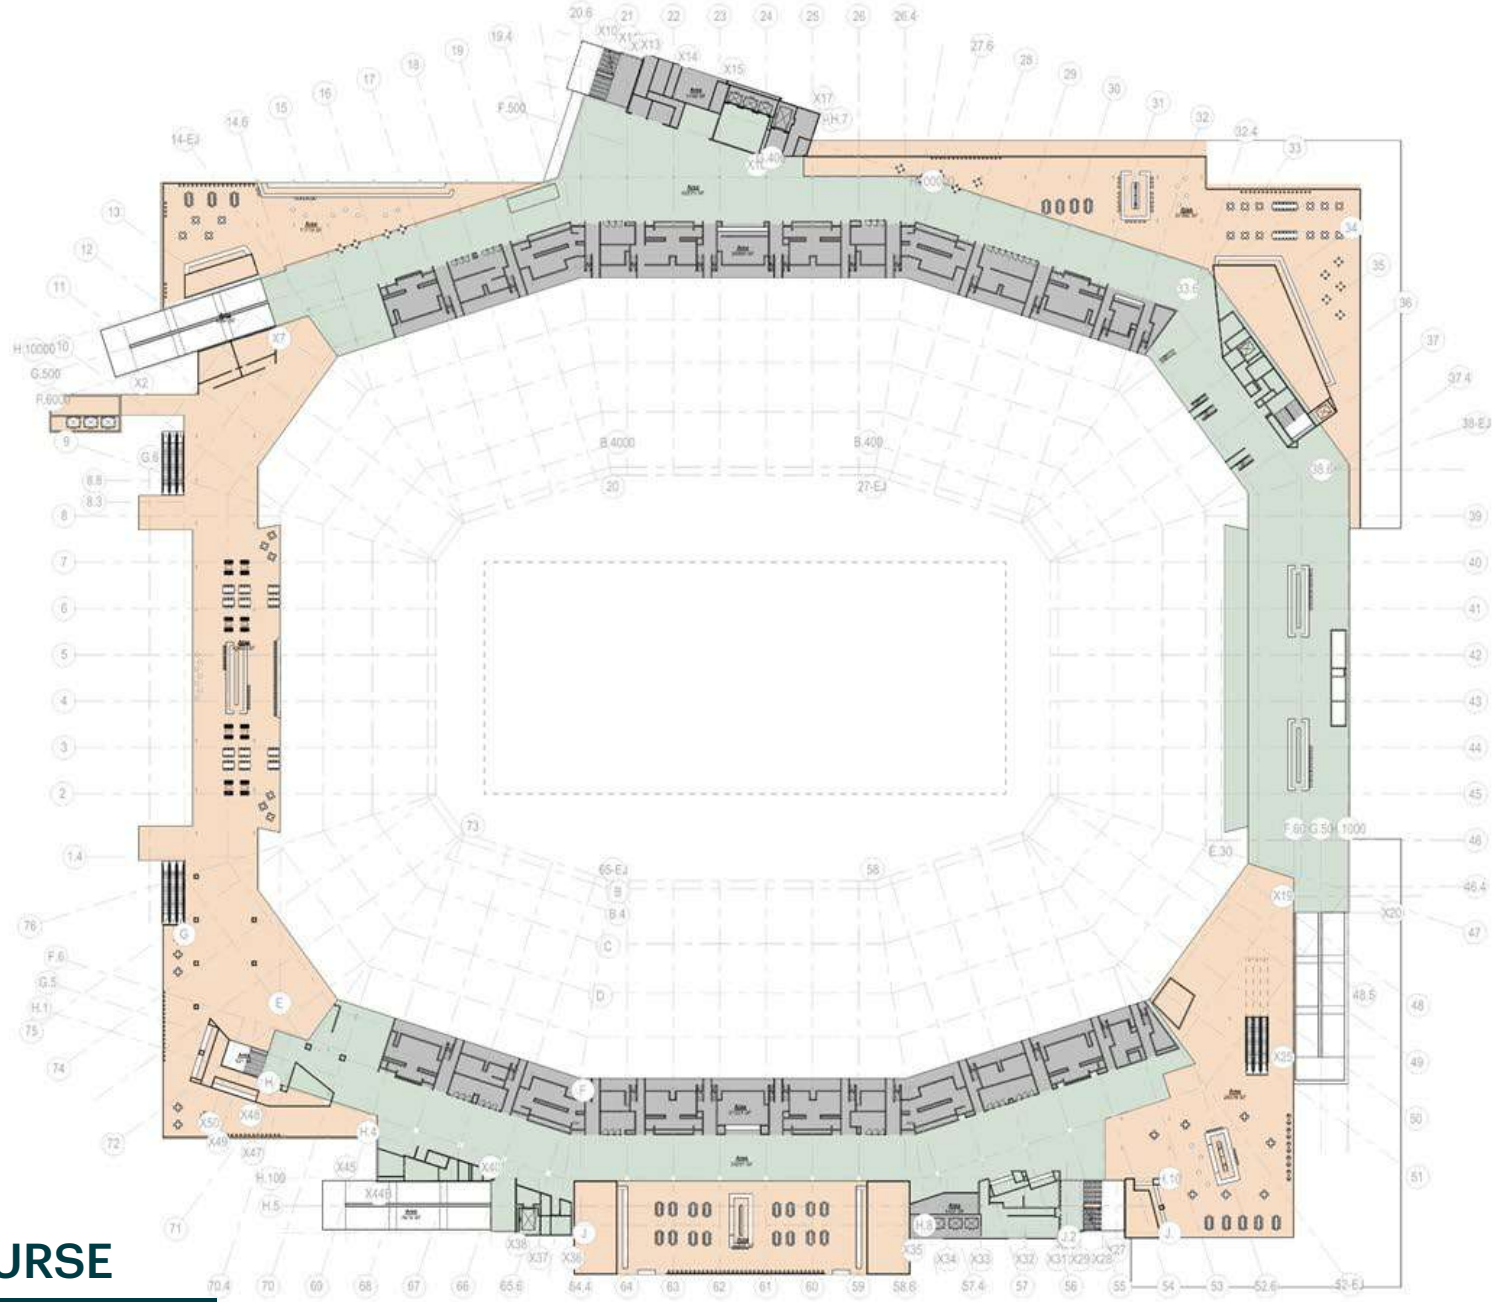

AREA LEGEND

- Existing to Remain
- New Premium
- New BOH
- New GA
- New Aux Lockers
- Premium Refresh
- BOH Refresh
- GA Refresh
- Home Team Refresh


07 Upper Concourse	
Construction Area	Area
Existing to Remain	56718 SF
GA Refresh	95523 SF
New GA	121921 SF
Grand total	274162 SF

07 UPPER CONCOURSE

LEVELS OF CONSTRUCTION


07 UPPER CONCOURSE


EXISTING UPPER CONCOURSE

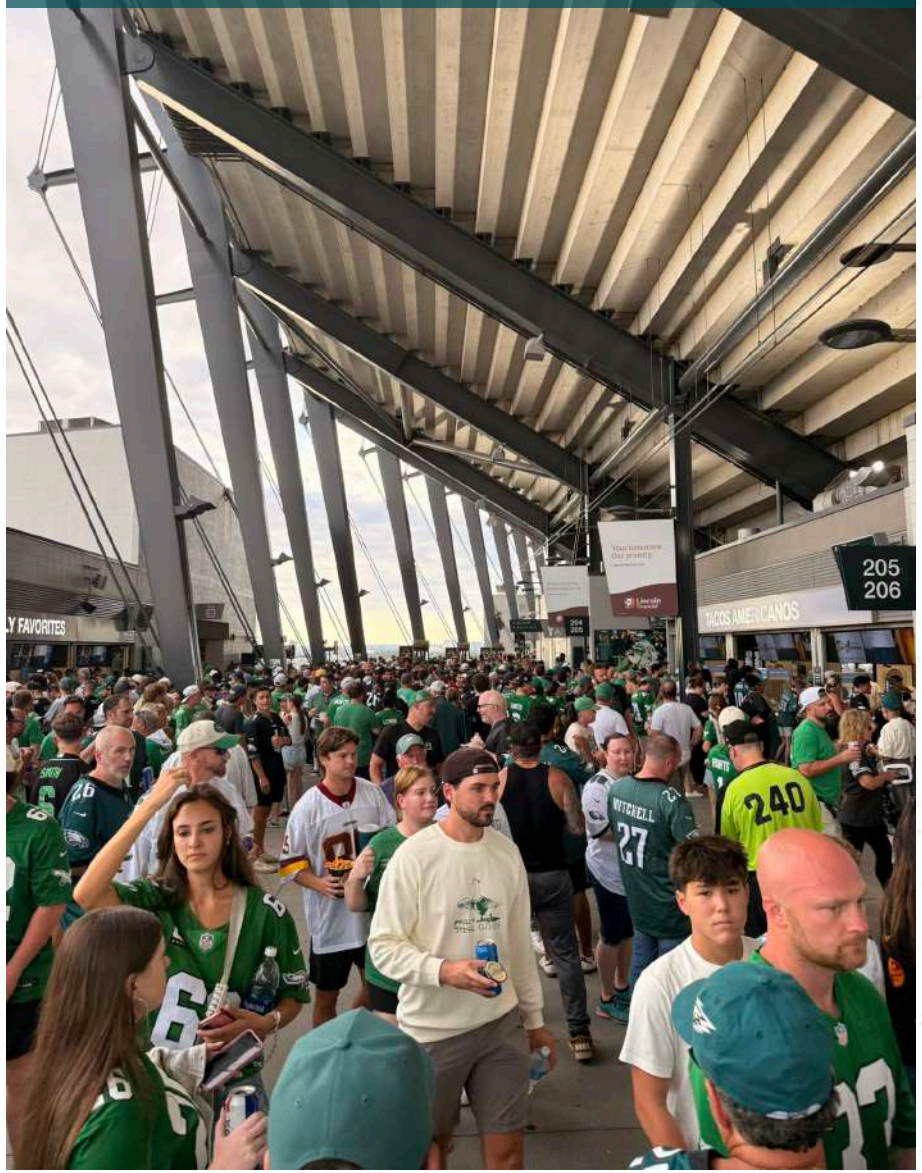

PROPOSED UPPER CONCOURSE

- EXTERIOR CONNECTIONS
- F&B OPPORTUNITIES
- EXPANDED CIRCULATION

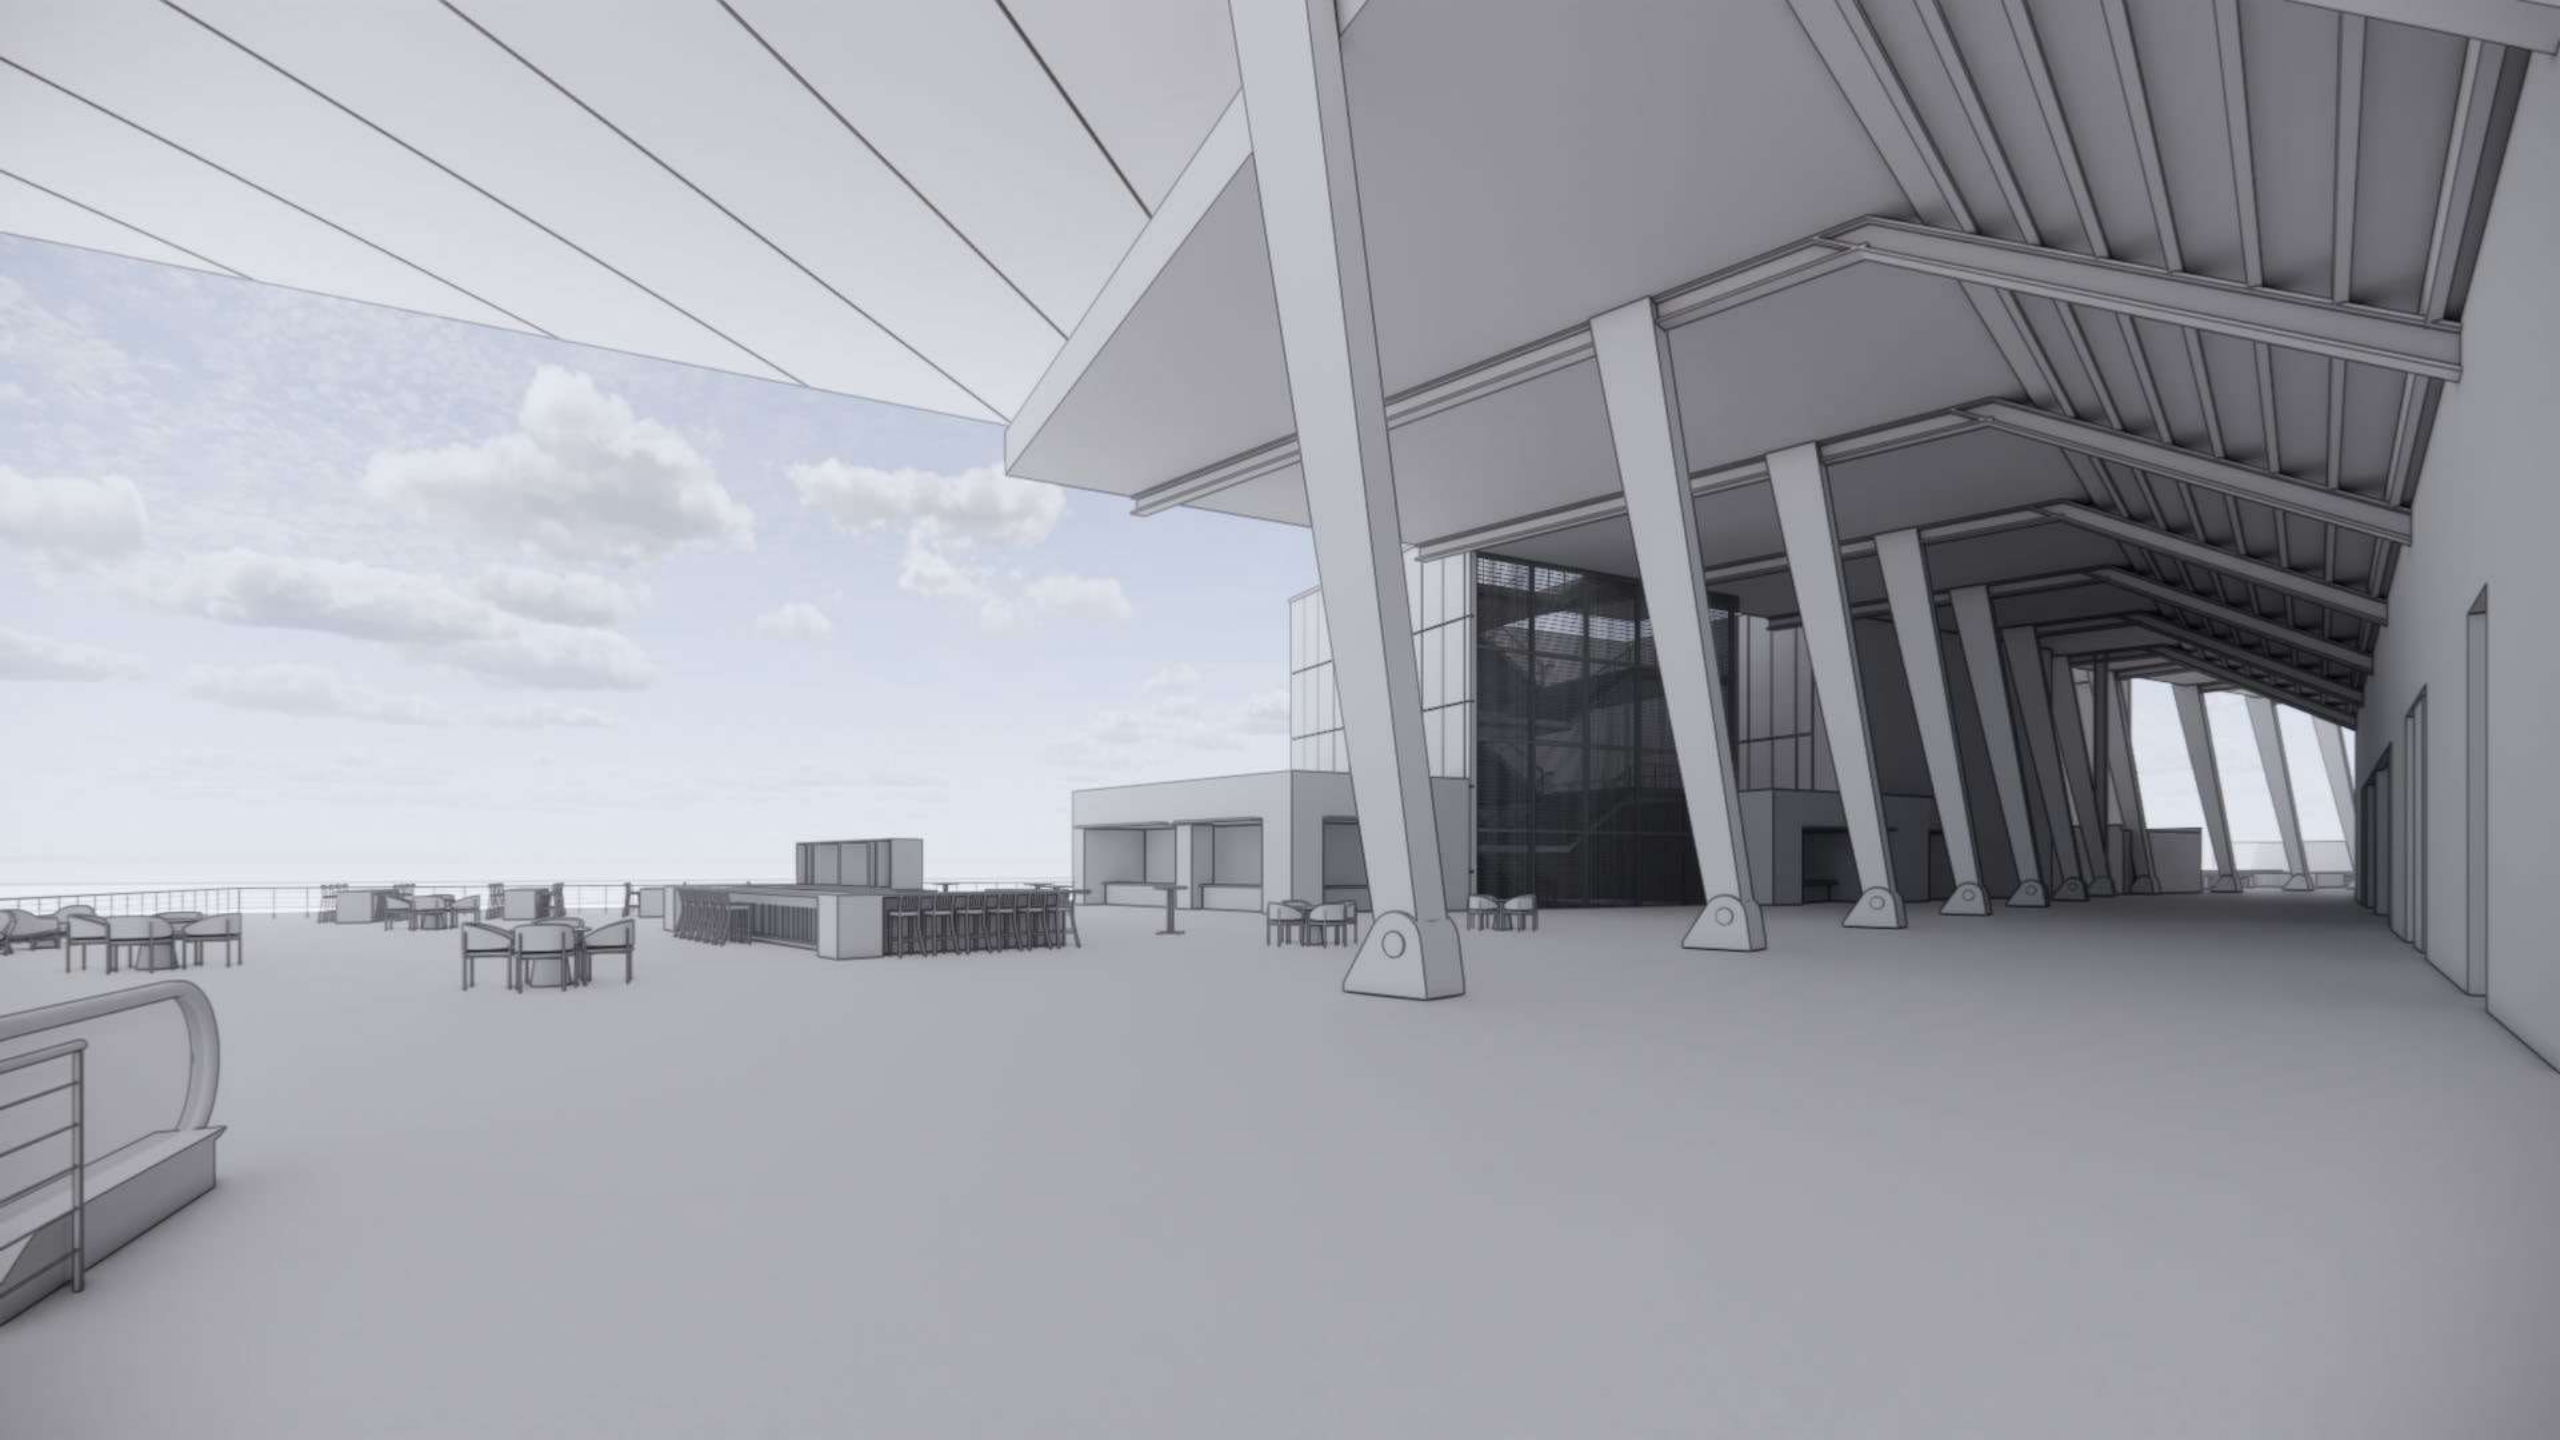

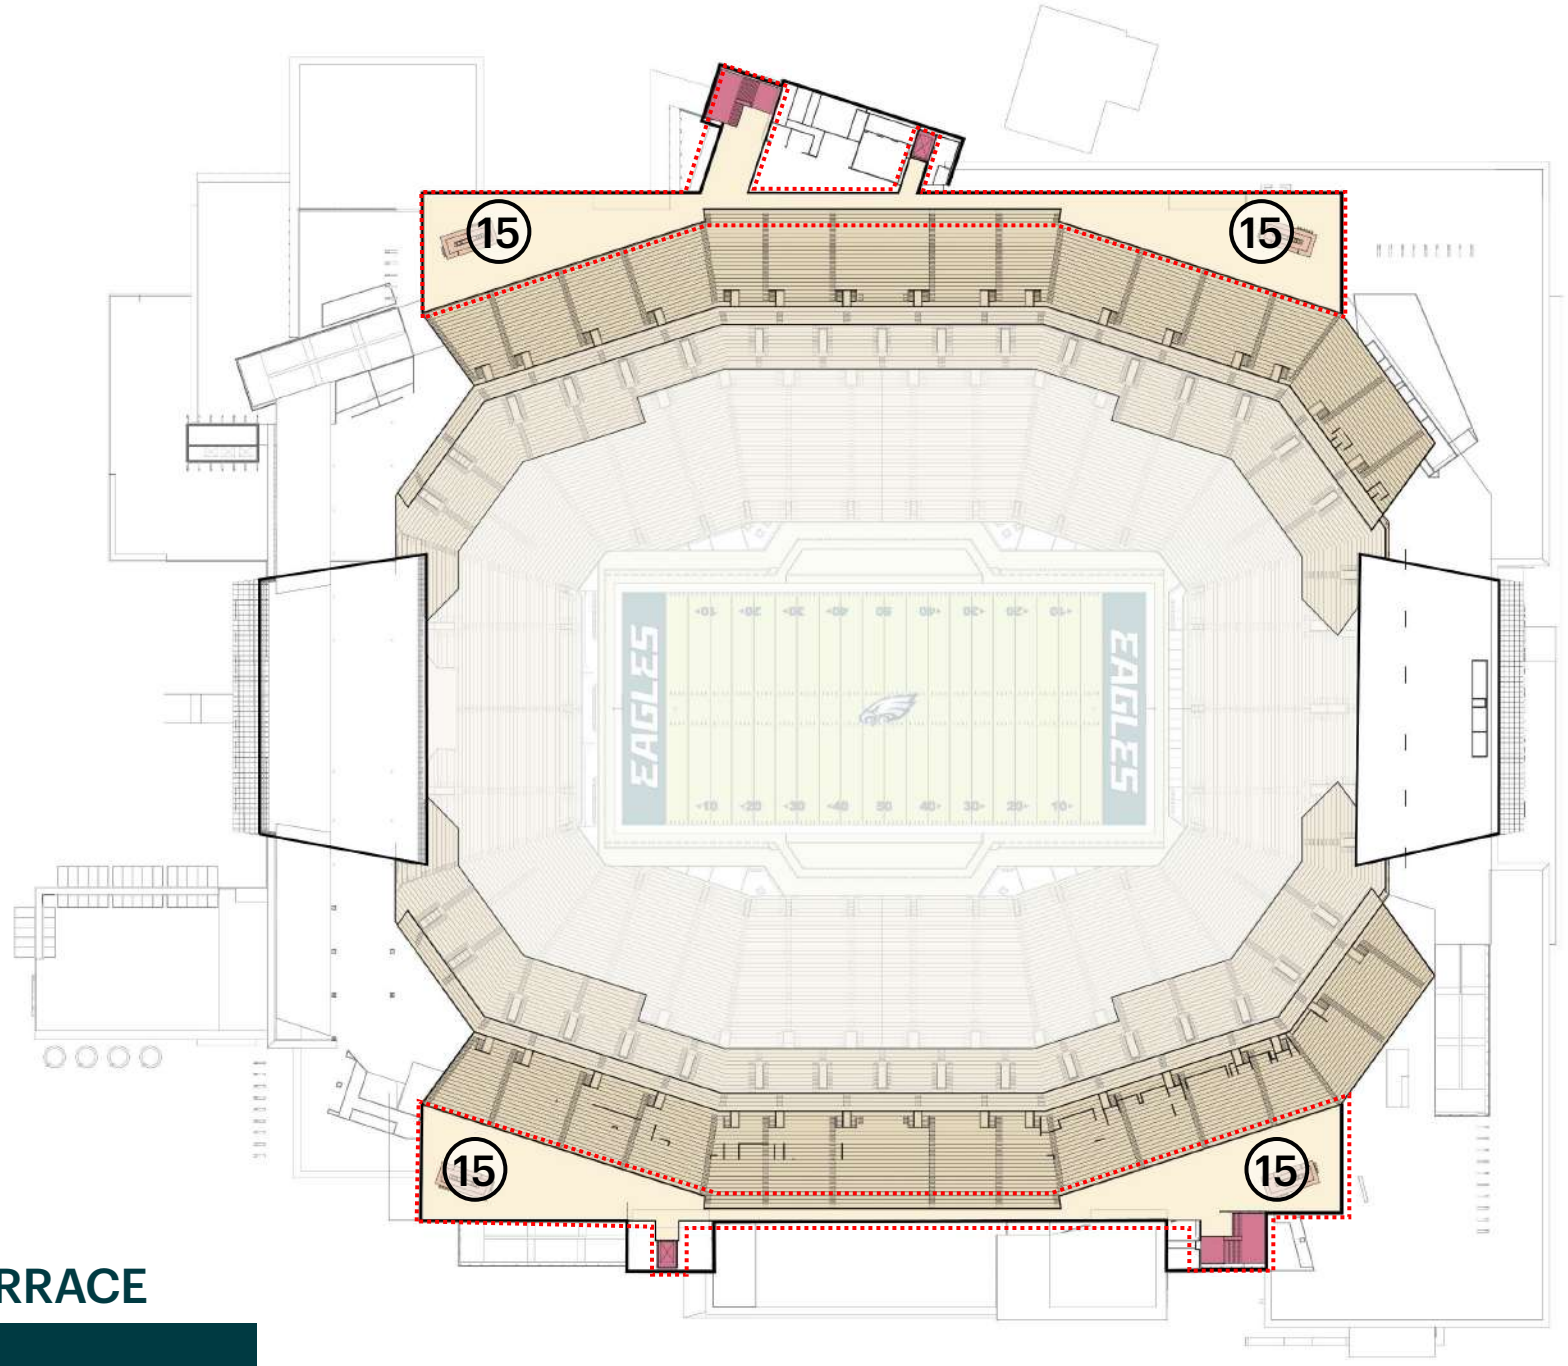


HOME TEAM
OPERATIONS
MEP/BOH
F & B
RETAIL
CLUB
SUITE
CIRCULATION
BOWL
AUXILIARY
VERTICAL CIRC

07 UPPER TERRACE

PROPOSED

Note:
All numbers indicated on plans refer to 10-year and 20-year project list at the end of planning section.

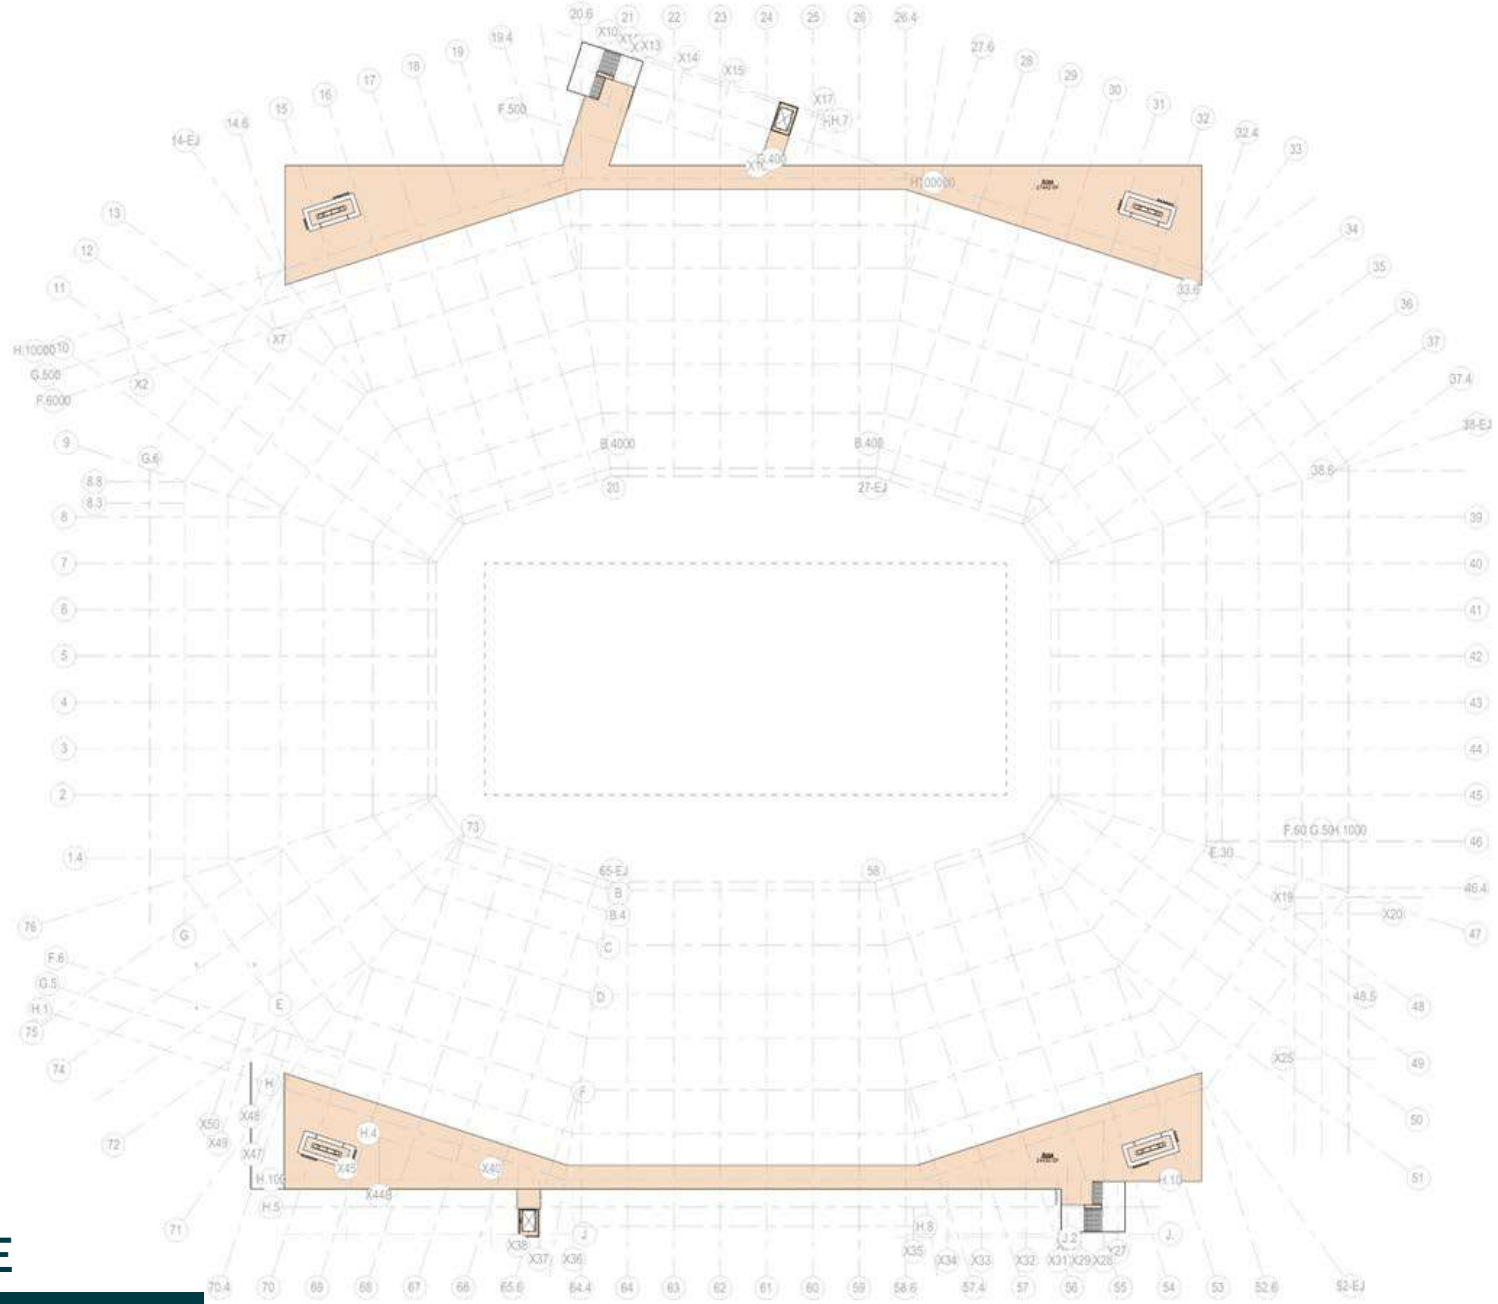

AREA LEGEND

- Existing to Remain
- New Premium
- New BOH
- New GA
- New Aux Lockers
- Premium Refresh
- BOH Refresh
- GA Refresh
- Home Team Refresh

08 Upper Terrace

Construction Area	Area
New GA	51891 SF
Grand total	51891 SF

07 UPPER TERRACE

LEVELS OF CONSTRUCTION

10 YEAR RENOVATION PROJECTS

1. Event Level and Lower Bowl Upgrades

Lower Field and all event level spaces inside the service loop by 4'-0"

Includes Field Alternate #1 @ 2' lower.

Includes Field Alternate #2 @ 0' lower (existing elevations)

Lower Bowl changes - new rows, overbuild / restrike bowl, new vom stairs directly to clubs.

New VIP Clubs / Suites beneath lower bowl, inside the service loop.

Refresh East VIP entrance and add path to VIP club

Create new West VIP Entrance with VIP / Owners Parking.

Modify Ops offices and storage spaces as indicated on plans.

Relocate Visitors and Aux Locker Rooms

2. VIP Circulation - Escalators

West Side - creation of a new escalator tower west of the existing elevators.

Bank of two escalators that go from Plaza Level -> Lower Suite Level -> Club Level -> Upper Suite Level.

East Side

Add two escalators from Club Level to Upper Suite Level, including associated floor slab opening.

3. VIP Circulation - SE VIP Elevator and Entrance

New single elevator outside of the Fan Duel Club from Plaza to Upper Concourse, stopping at all levels except Presidents Suite.

Includes new entrance enclosure at SW corner of the building replacing the existing players entrance, owner's driveway/parking and Fan Duel Entrance.

New VIP corridor from Club entrance directly to the south endzone field level club.

4. SW GA Entrance

New GA stairs and (3) escalators as shown from Plaza to main concourse.

Includes new parking area underneath of the expanded main concourse.

New set of (3) escalators providing access from

5. North Entry Plaza

Renovate the north entry plaza based on plan provided by Studio MLA.

Includes new paving materials and landscaping, new secure perimeter fencing and new security canopies as indicated on the plans.

Limit area of impact from the stadium to the security line /canopies. All other work will be a part of the 20+ year renovation.

6. South Endzone

Remove existing video board.

New occupiable video board, as shown in bowl and video board sections.

Lower Suite expansion to old video board location, including new GA+ terrace underneath new video board.

Club Level - Modify club level slabs to connect between the east and west sides with a new video board club.

Upper Suite Level -

Remove 14 suites, replace with video board club.

Relocate writing press to SW corner.

Create 9 new suites at former writing press location.

Upper Concourse - Create new GA+ club inside of video board.

7. North Endzone

Remove entire north endzone construction above the main concourse, including video board, redzone suites, NE Terraces, Bird's Nest, NW terraces, all concessions and restrooms as indicated on plans.

Remove NW escalators.

New occupiable video board

New vertical circulation

(2) new sets of (3) escalators at NE and NW corners, connecting Plaza Level -> Main Concourse -> Club Level -> Upper Suite Level -> Upper Concourse -> Upper Terrace.

Vertical Circulation Tower with (3) passenger elevators, connecting all levels from Plaza to Upper Terraces, except for Presidents Suite Level.

Club and Upper Suite and Upper Concourse Levels expand to each include a new video board club and additional slab area at the north to connect to the video board, escalators and circulation tower.

Upper bowl changes as described in the bowl section.

8. Main Concourse Expansion

Expand main concourse to the corners, as indicated on the plans.

New market style concessions as indicated on the pans at all expanded concourse areas.

New loge / mini-suite product at east 50 yard line.

New Club on West concourse 50 yard line.

Remove existing GA escalators at NE and W areas. Infill slabs as needed at all levels.

9. Club Level

Finish and lighting and experiential graphic / wayfinding refresh of entire club level.

20 YEAR RENOVATION PROJECTS

10. Site Landscaping and Parking Updates

Expand the North Plaza scope to include all work shown on the Studio MLA Plans

11. North Endzone

Beer Hall, including new commissary kitchen.

Team Store on Plaza and Main Concourse, including BOH warehouse space on Plaza level.

Museum

12. Presidents Suite Level Expansion

West Side:

Expand presidents club to north and south to include new loge products.

Remove 5 rows of club level bowl as indicated.

New floor connection to the SW elevators / escalators and to NW ramp.

East Side:

Remove 5 rows of club level bowl as indicated.

Build new slab connecting Presidents club to the existing elevators and new escalators.

Club Level:

Demo entire club level.

Build new club level at the height of the west side club mezzanine (+8'-3") to accommodate the expanded President Suite on east and west.

New restrooms in the same location as old restrooms at the bowl side.

New concessions and markets.

Cut new voms into the precast stadia and provide new stairs

New club level precast stadia and with voms and stairs located to access seating from new club elevation.

Single escalator on both East and West sides from Lower Suite Level to President's Club Level.

13. Suite Refresh

Refresh of all suites, including all finishes, millwork island and furniture.

14. Upper Concourse Expansion

Expand slabs at upper concourse as indicated.

Provide new markets and bars as indicated.

15. Upper Terrace

Remove 5 rows at the top of the upper seating bowl in NE, NW, SE, SW corners.

Build new upper terrace level as shown, including connections to the west elevators, new north escalators and elevators and the east elevators.

Extend East and West existing elevators and stair towers to the new Upper Terrace level to accommodate egress, concessions and services.

16. New Canopy and Structure

Provide new roof canopy as shown, including all structural elements.

Refer to Thornton Tomasetti narrative for additional information.

17. Eagles Locker Room Renovation

Refresh Eagles home locker room facilities, including family areas.

Vertical Transportation Matrix – New vs. Existing

Elevators	Type:	North Tower (New)	Type:	East VIP (Existing)	Type:	East Service (Existing)	Type:	SE Passenger (Existing)	Type:	SE Passenger (New)	Type:	SW Passenger (Existing)	Type:	SW Owners (New)	Type:	NW Passenger (Existing)
	Location:	Cores NE, SE	Location:	S	Location:	Core E 02	Location:	Core W 01	Location:	Core W 01	Location:	Core SW	Location:	Core W 02	Location:	Core E 01
	Quantity:	3	Quantity:	3	Quantity:	1	Quantity:	1	Quantity:	1	Quantity:	4	Quantity:	1	Quantity:	1
	Capacity:	6,000 lbs	Capacity:	6,000 lbs	Capacity:	6,500 lbs	Capacity:	6,000 lbs	Capacity:	6,000 lbs	Capacity:	6,000 lbs	Capacity:	6,000 lbs	Capacity:	6,000 lbs
	Speed:	350 FPM	Speed:	350 FPM	Speed:	350 FPM	Speed:	350 FPM	Speed:	350 FPM	Speed:	350 FPM	Speed:	350 FPM	Speed:	350 FPM
	Size:	10' x 9'	Size:	10' x 9'	Size:	10' x 9'	Size:	10' x 9'	Size:	10' x 9'	Size:	10' x 9'	Size:	10' x 9'	Size:	10' x 9'
Level	Stops:	6	Stops:	6	Stops:	7	Stops:	6	Stops:	6	Stops:	7	Stops:	7	Stops:	6
01 - Plaza	X		X		X		X		X		X		X		X	
02 - Main Concourse	X		X		X		X		X		X		X		X	
03 - Lower Suites			X		X		X		X		X		X		X	
04 - Presidential Suites											X		X			
05 - Club Level																
05.5 - Upper Club	X		X		X		X		X		X		X		X	
06 - Upper Suites	X		X		X		X		X		X		X		X	
07 - Upper Concourse	X		X		X		X		X		X		X		X	
08 - Upper Terrace	X		X		X											

Escalators	North GA (New)	West GA (New)	West GA (Existing)	S/W GA (New)
Level	Count	Count	Count	Count
01 - 02	6	3	2	
01 - 03				
02 - 03			2	
02 - 05.5	12			3
03 - 04		1		
03 - 05				
03 - 05.5			2	
05.5 - 06	6		2	
05.5 - 07				3
06 - 07	6			

NOTE: ALL NEW VIP ESCALATORS ON EAST AND WEST SIDES STOP AT PLAZA/EVENT, MAIN CONCOURSE, LOWER SUITE, PRESIDENTS SUITE, CLUB AND UPPER SUITE LEVELS.

New

Existing

10 Yr. Plan Alternate

ROOF TOTAL
9,041 sf

	MATERIAL	AREA (SF)	
	Reflective soffit	0	—
	Soffit	9,041	100%
	Solar panels · on top of structural space frame	0	—
	TOTAL	9,041	100%

10 Yr. Plan Alternate

METAL PANEL



20,419 SF

MASONRY



24,585 SF

FINS



20,817 SF

GLAZING




85,853 SF

REFLECTIVE ROOF / SOFFIT



0 SF

SOFFIT

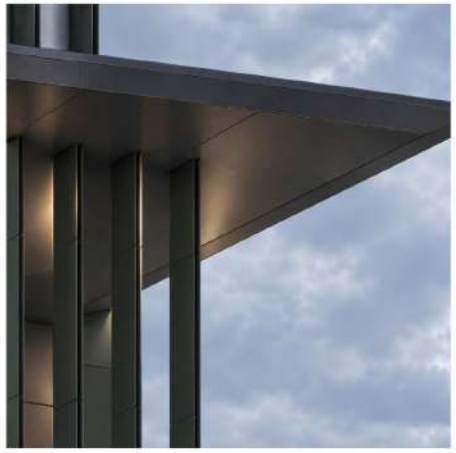

9,041 SF

MESH/GRATE



9,763 SF


VIDEO BOARD



211,242 SF

10 Yr. Plan Alternate

MASONRY

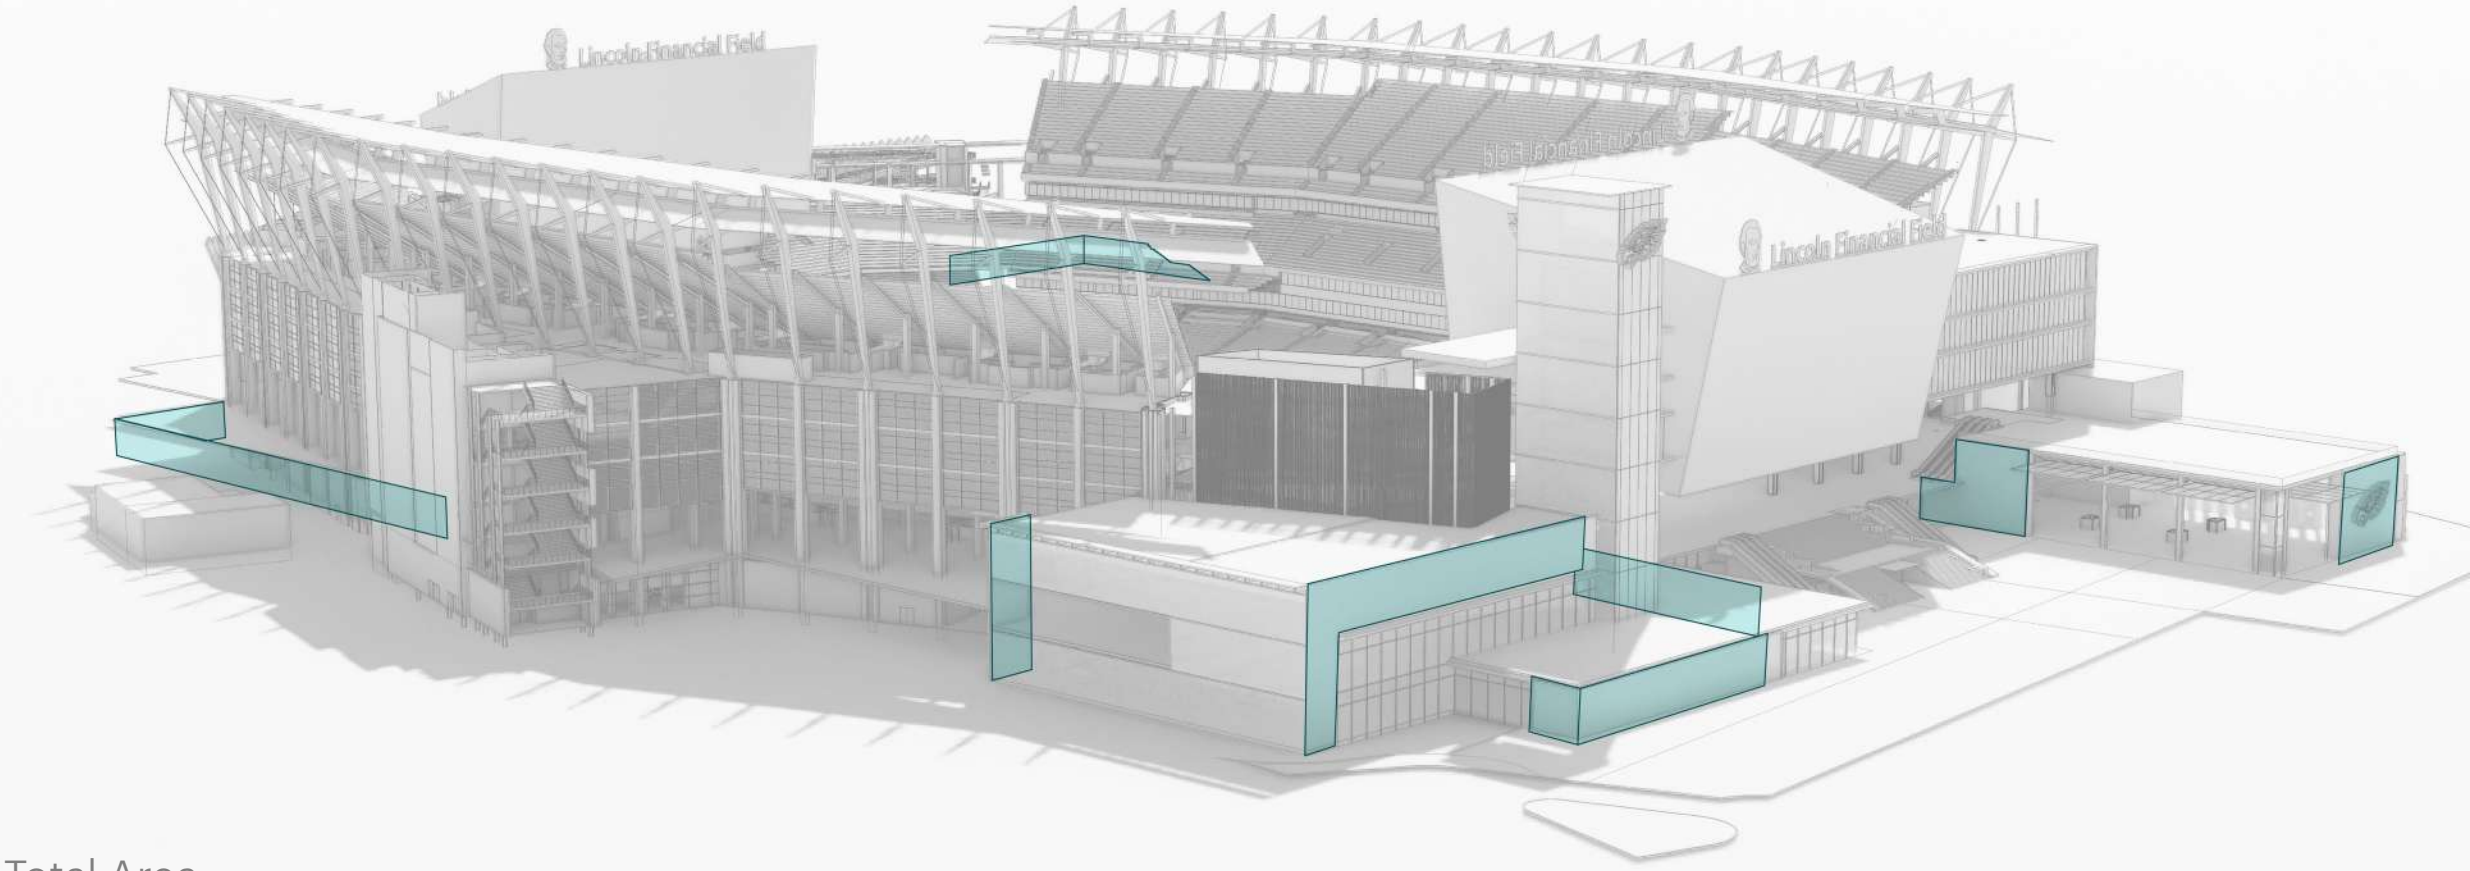


Total Area

24,585 SF

10 Yr. Plan Alternate

FINS

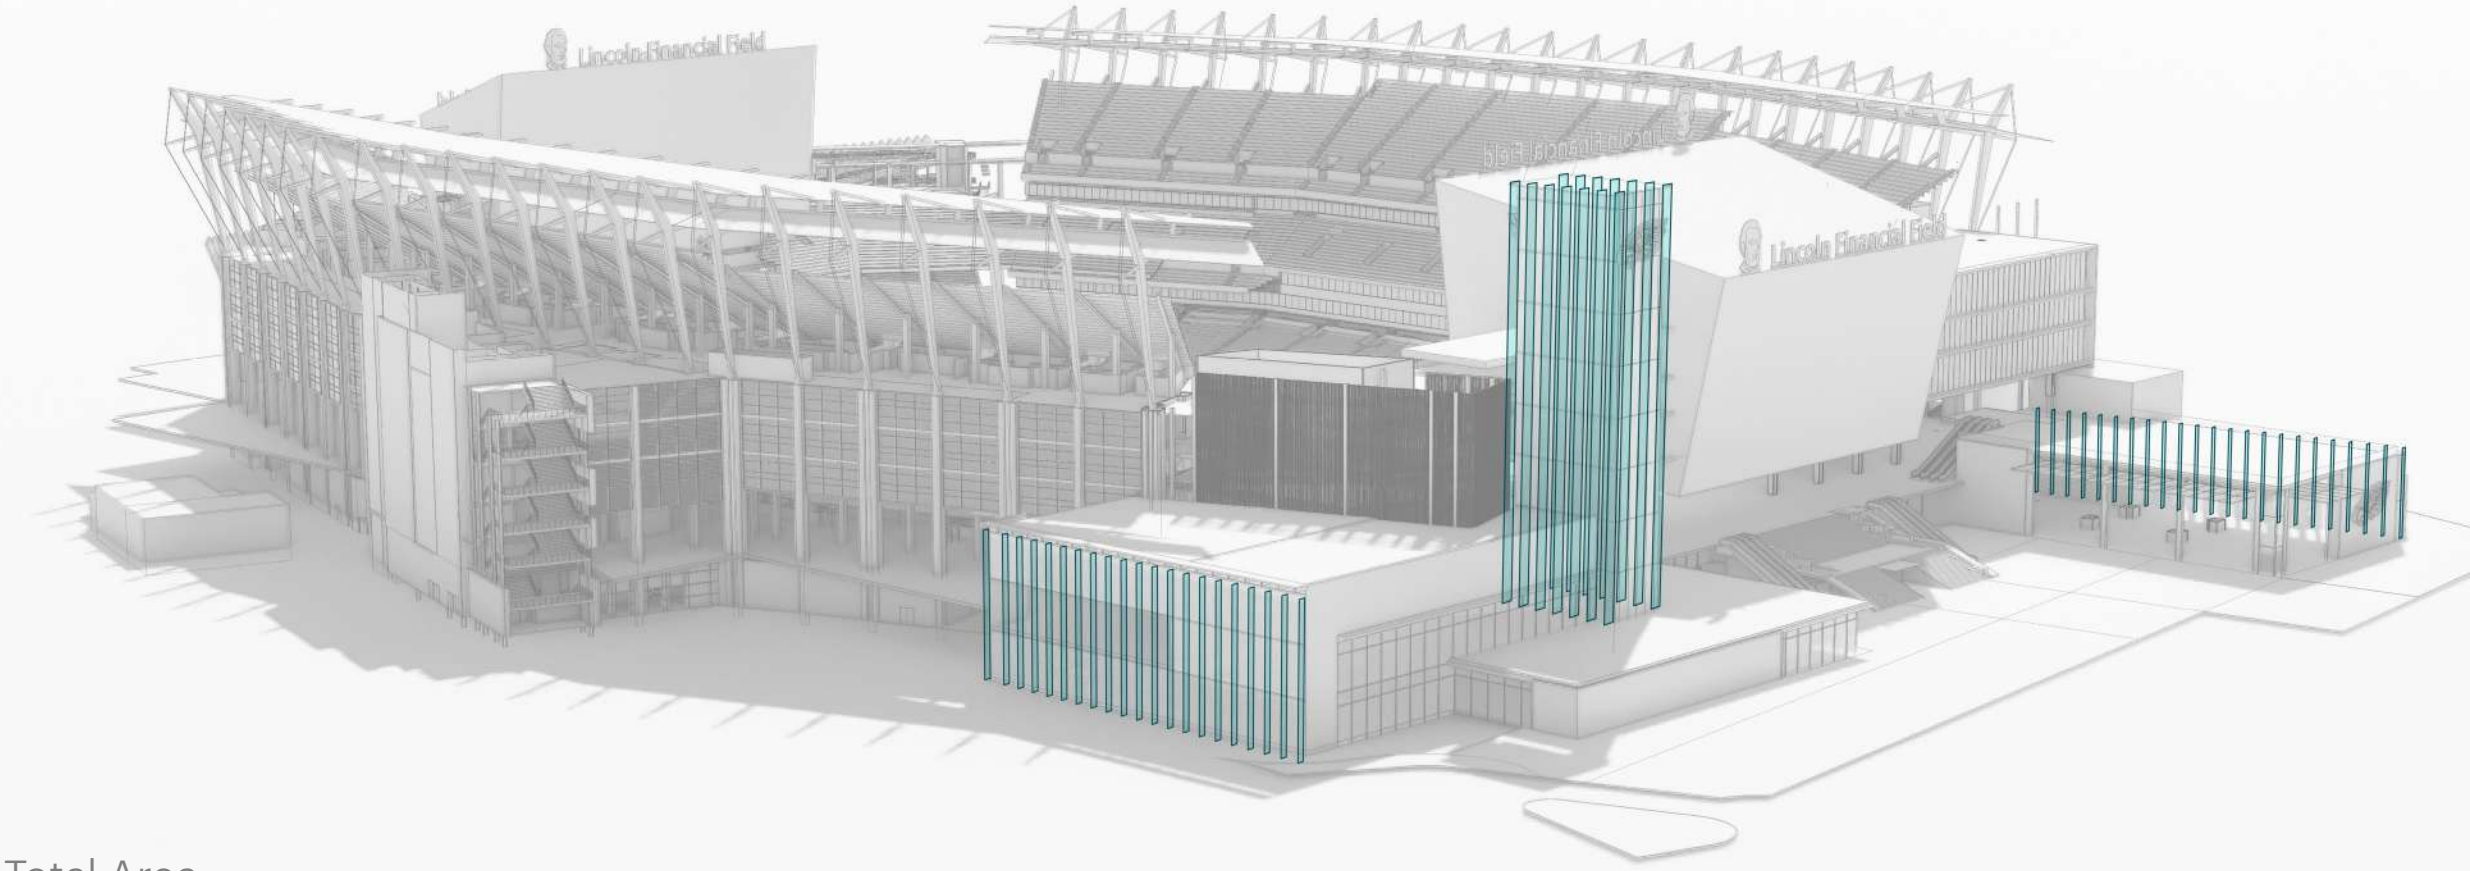


Total Area

20,817 SF

10 Yr. Plan Alternate

GLAZING

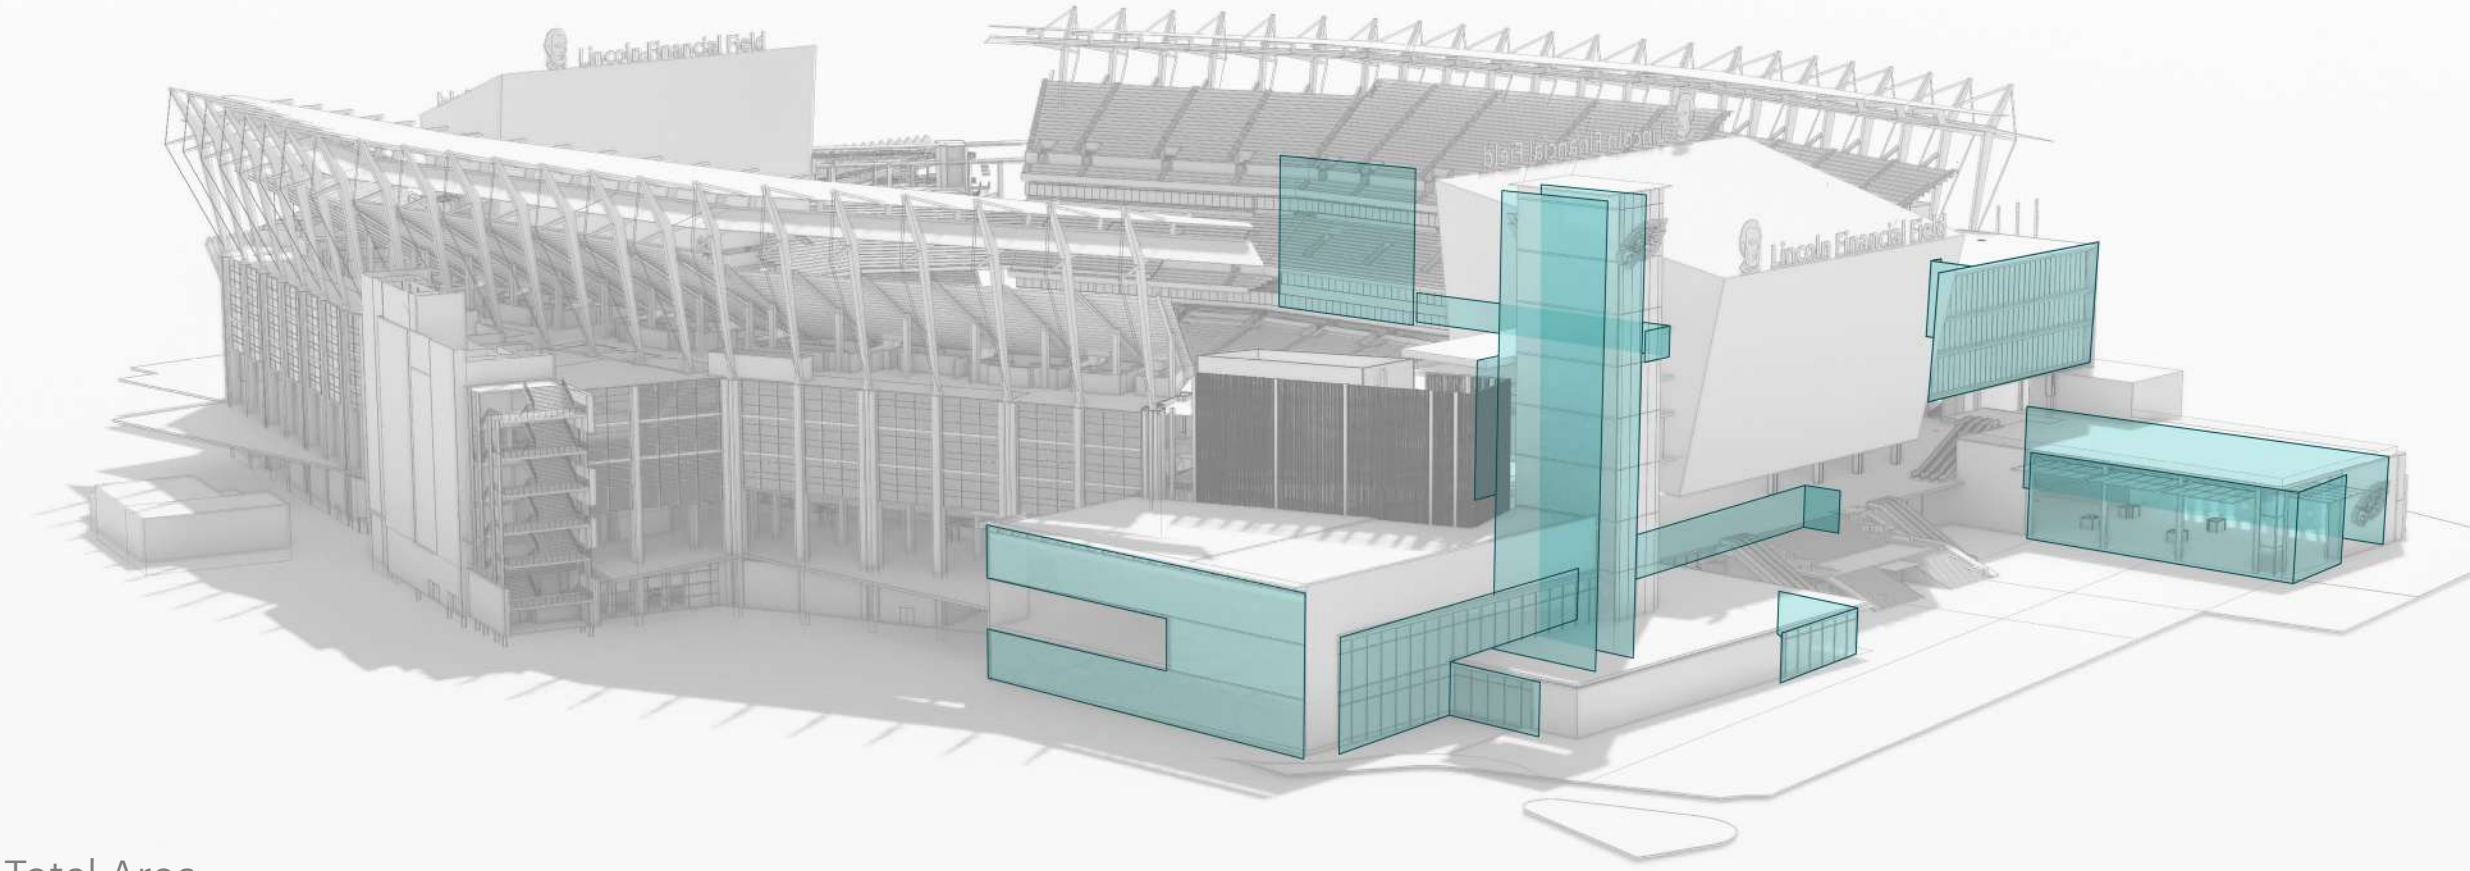


Total Area

85,853 SF

10 Yr. Plan Alternate

METAL PANEL

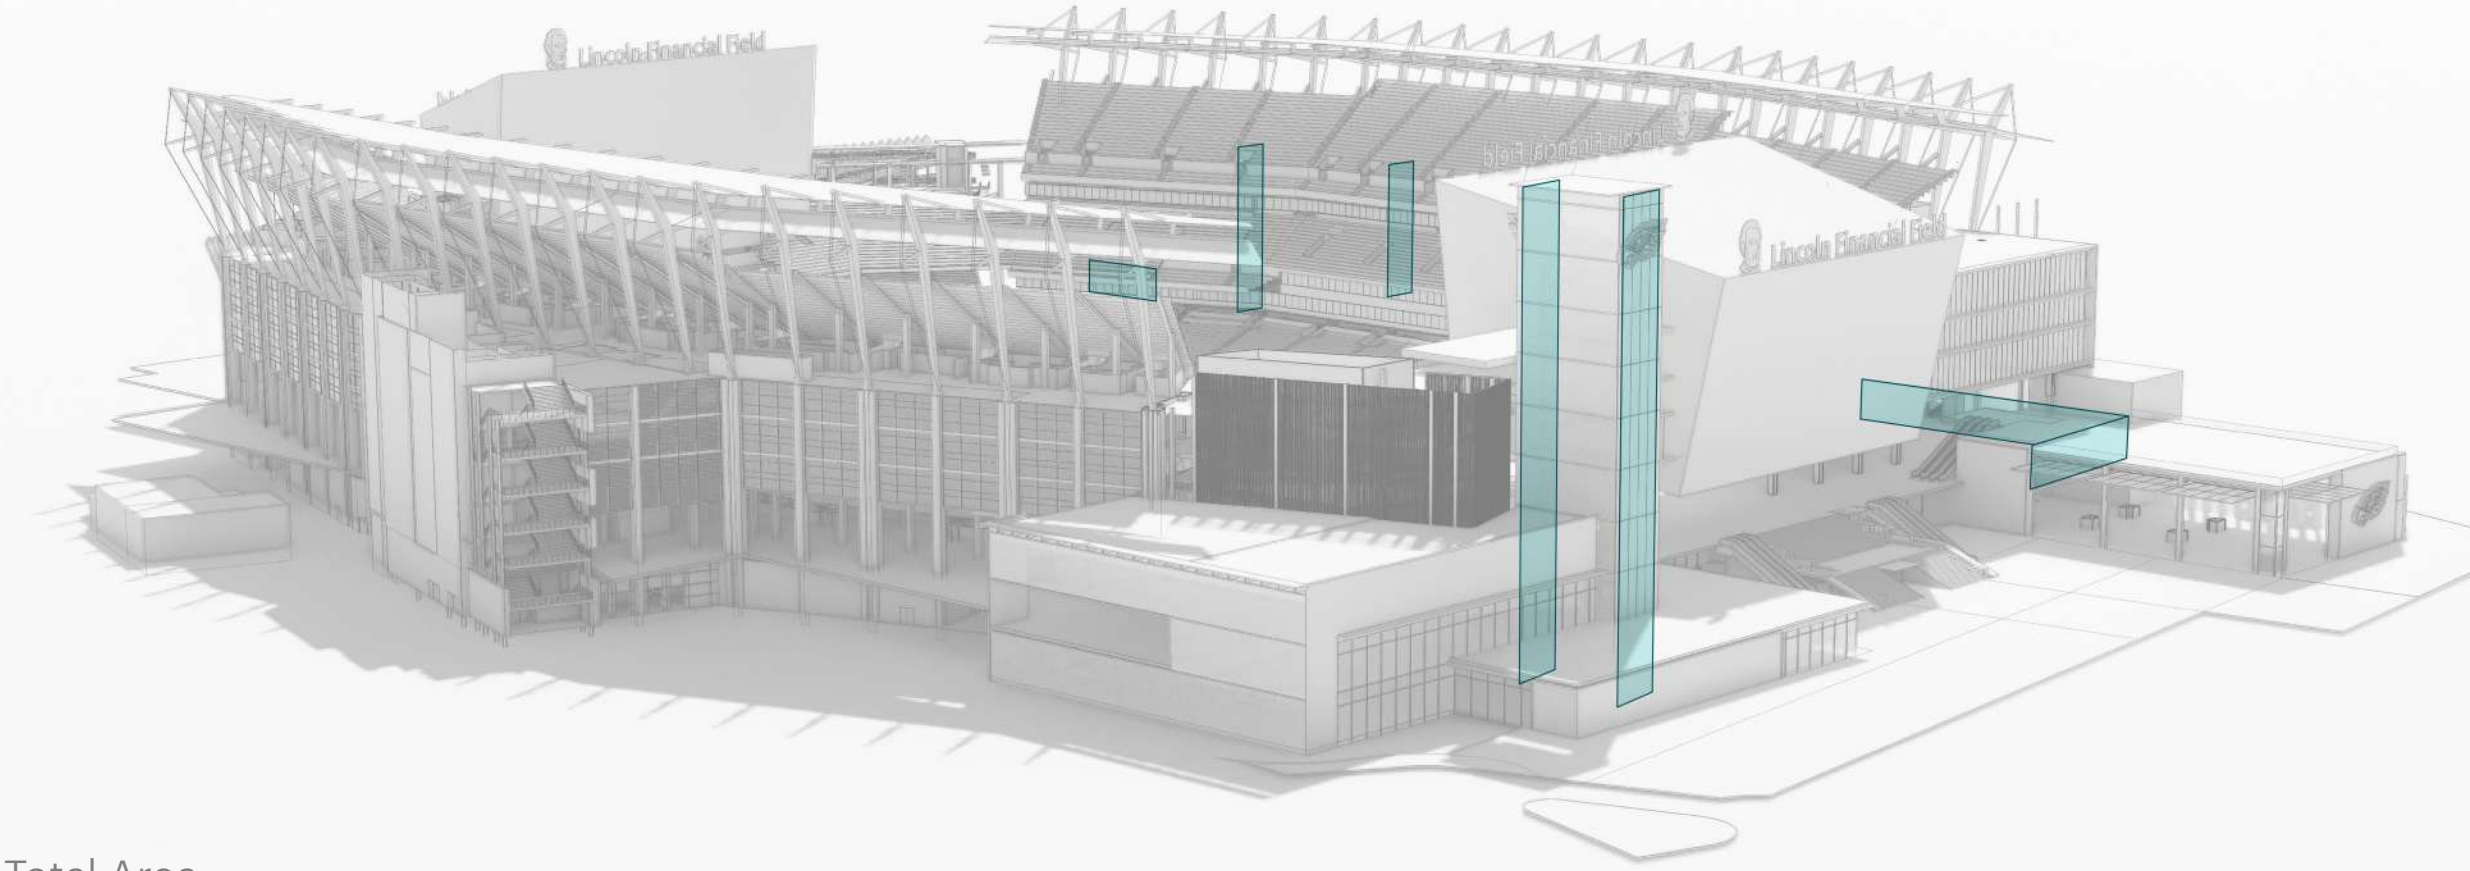


Total Area

20,419 SF

10 Yr. Plan Alternate


MESH / GRATE

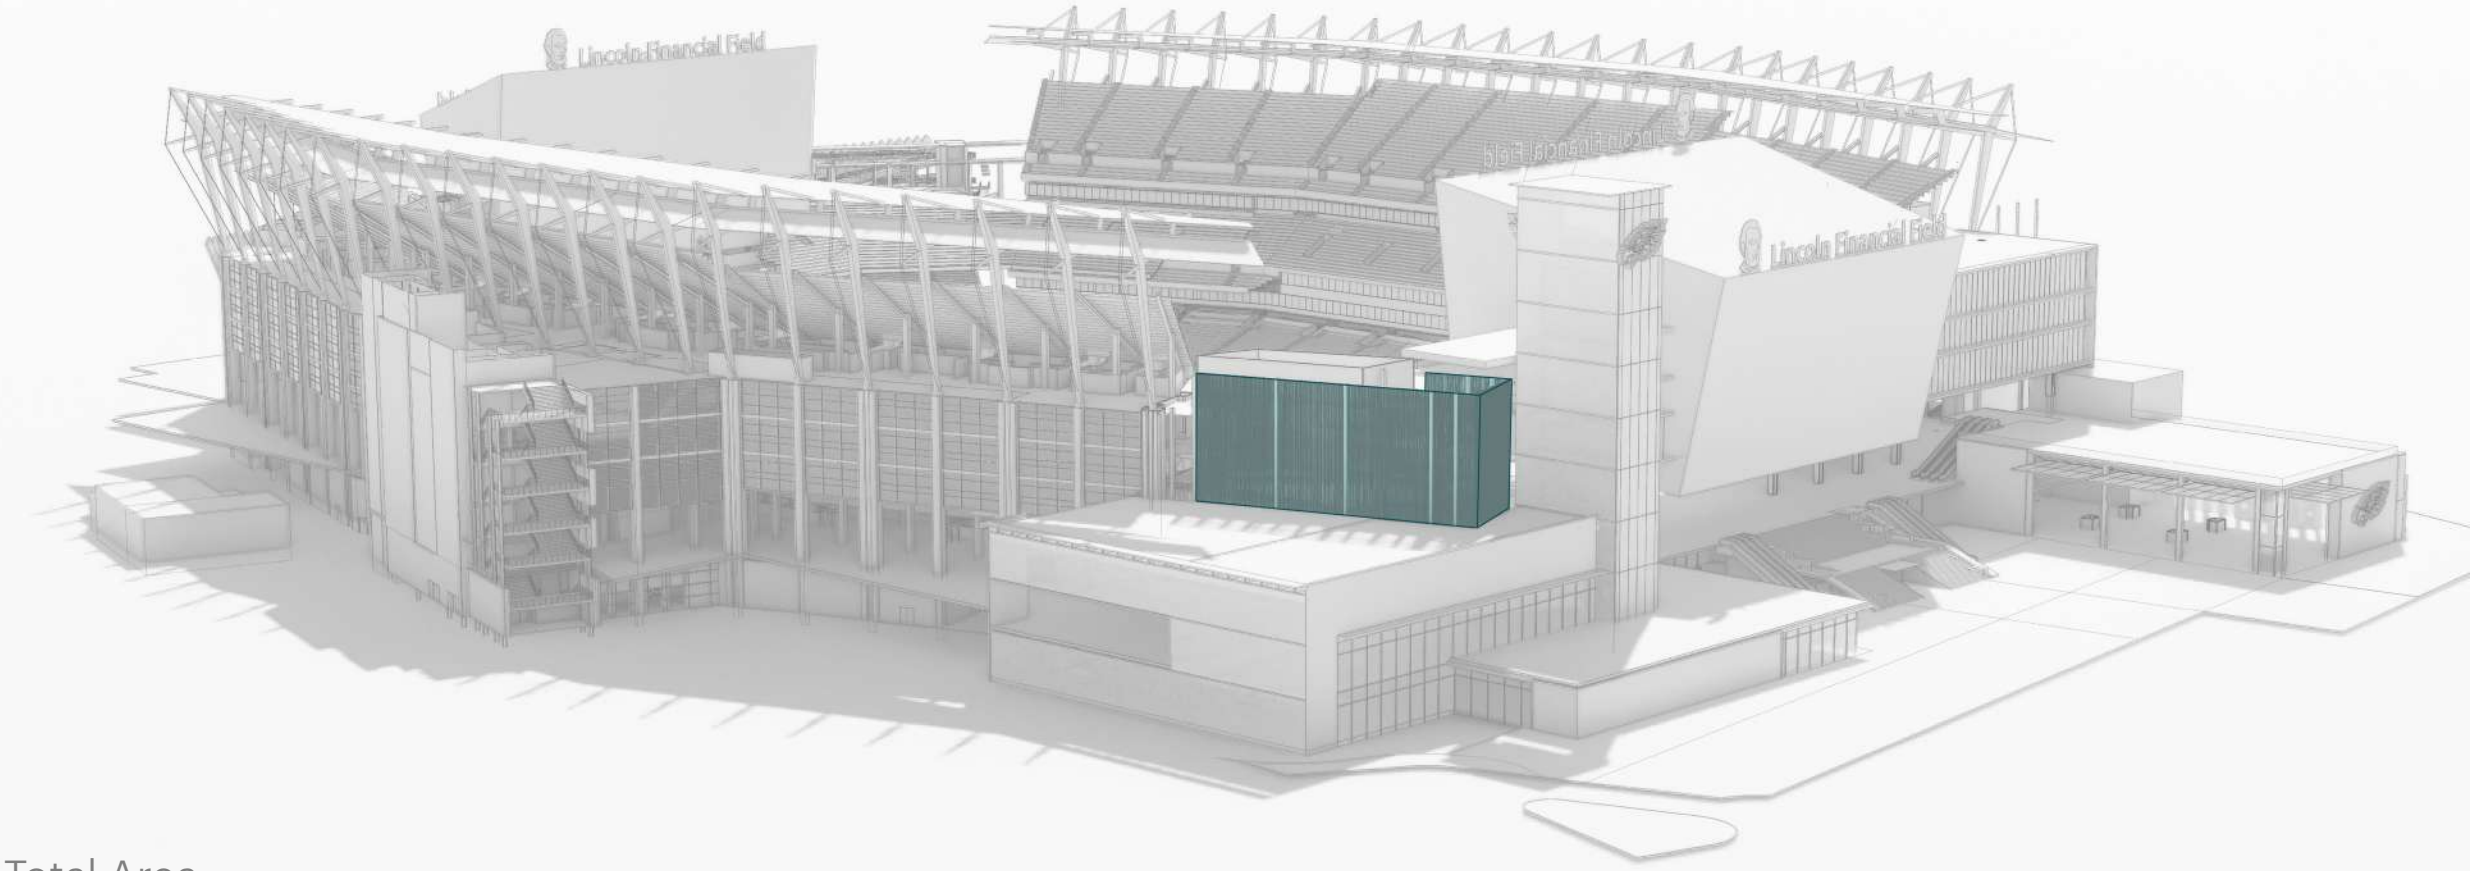

Total Area

9,763 SF

10 Yr. Plan Alternate
VIDEOBOARD

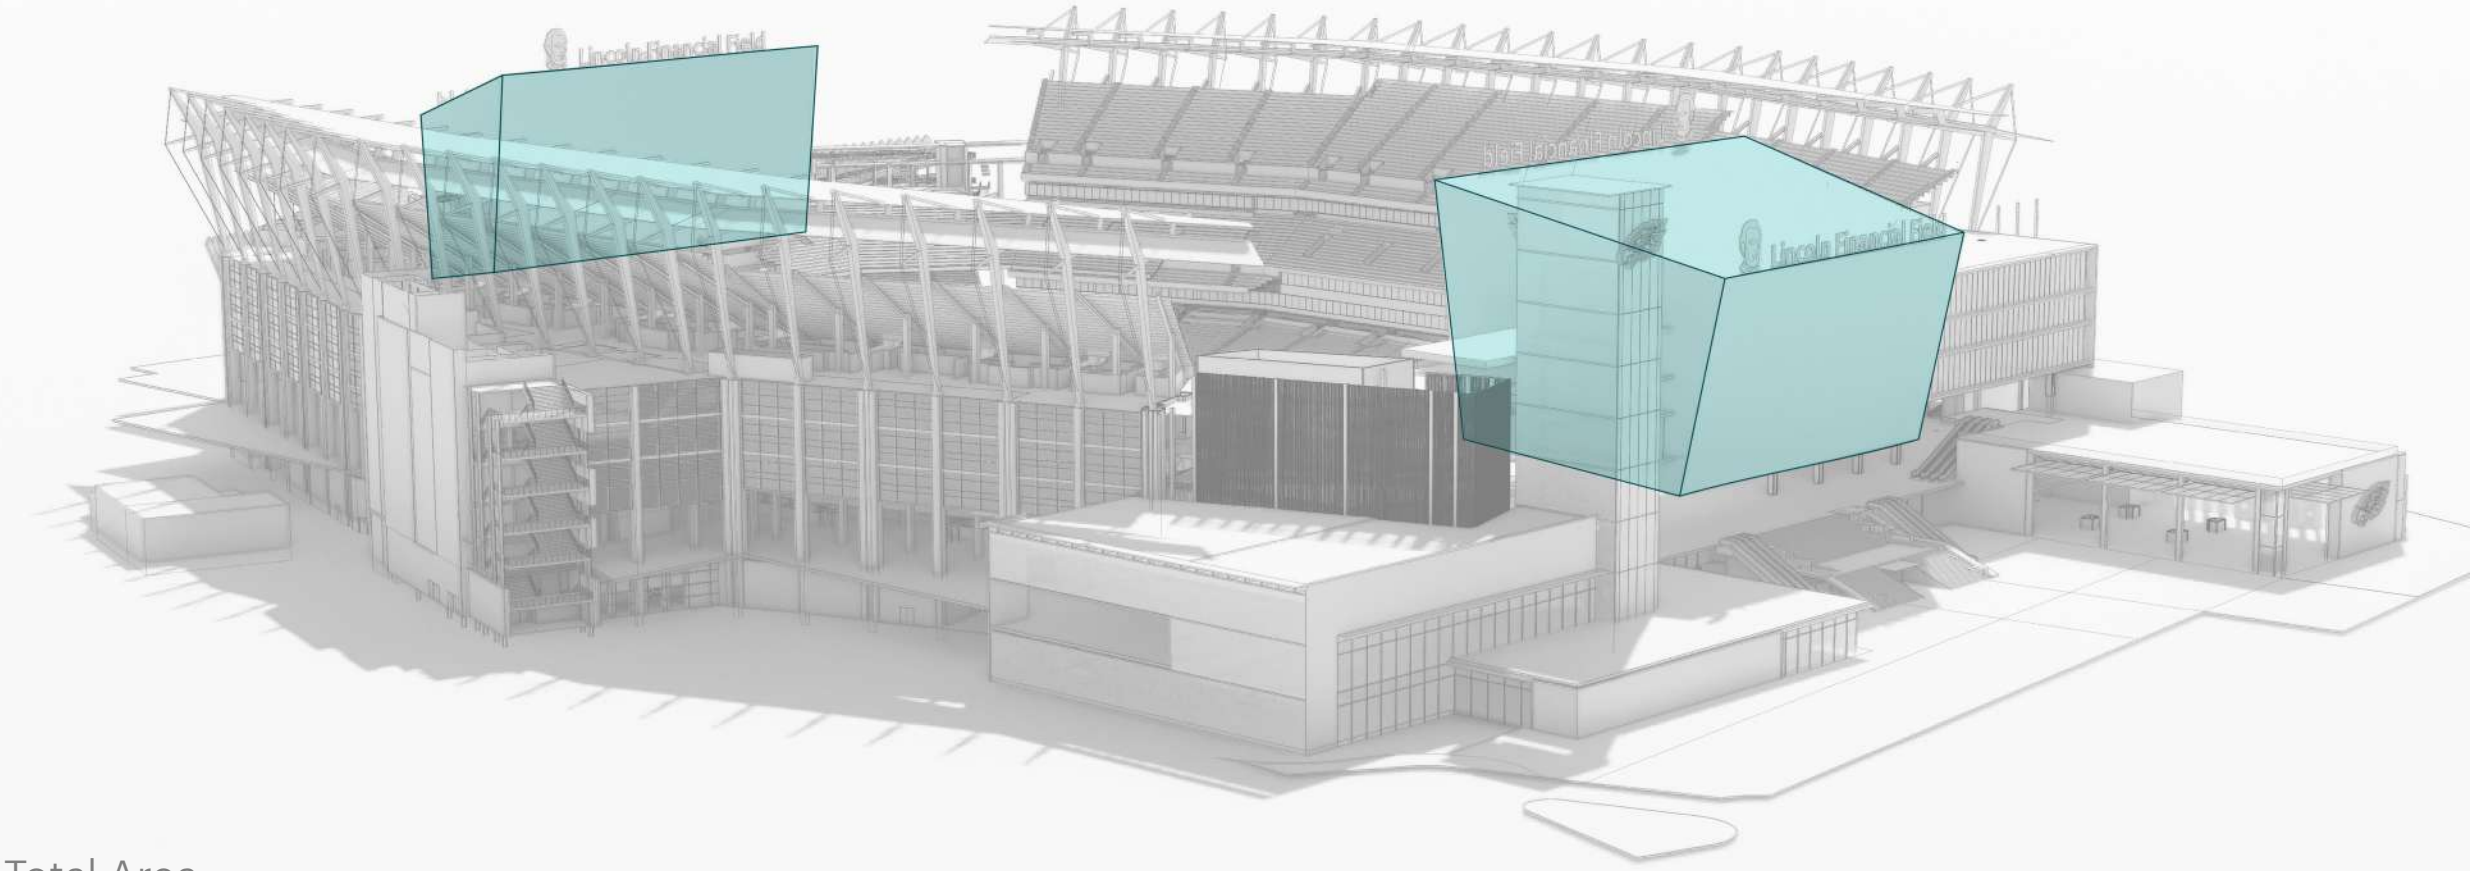

Total Area

211,242 SF


FACADE MATERIALS

FACADE TOTAL
161,437 sf

	MATERIAL	AREA (SF)	% OF FACADE
	Masonry	24,585	15.2%
	Fins	20,817	12.9%
	Glazing	85,853	53.2%
	Metal panel	20,419	12.6%
	Mesh / grate	9,763	6.0
	TOTAL	161,437	100%

10 Yr. Plan Alternate

SOFFIT

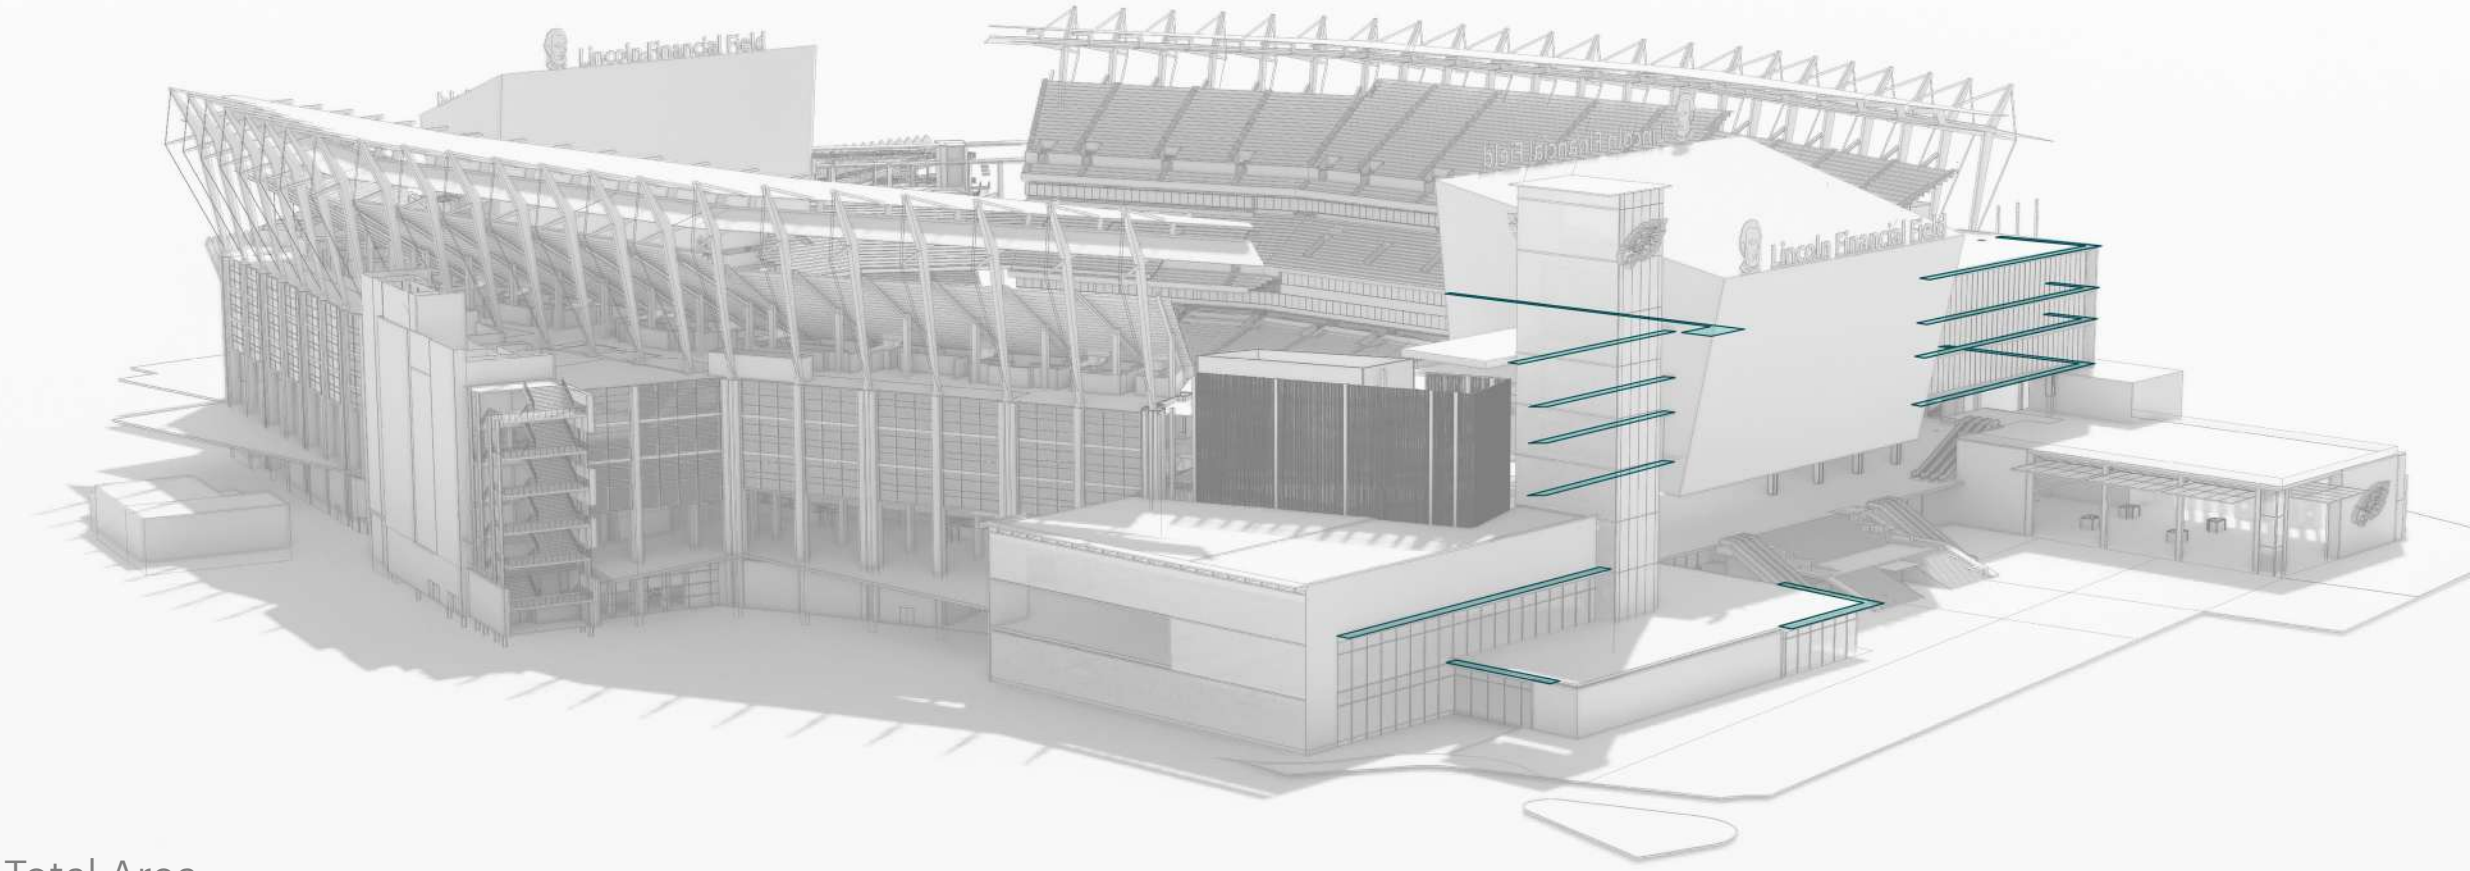

Total Area

9,041 SF

ROOF MATERIALS

ROOF TOTAL
716,408 sf

	MATERIAL	AREA (SF)	
	Reflective soffit	0	—
	Soffit	9,041	100%
	Solar panels · on top of structural space frame	0	—
	TOTAL	9,041	100%



FCA Analysis

HKS FCA Review Overview

HKS has reviewed the Facilities Condition Assessment (FCA) prepared by Venue Solutions Group, dated January 9, 2025, which includes a 163-page assessment report and an associated Capital Expenditure (CapEx) document. Based on this review, HKS has determined that the majority of the recommendations identified in the FCA pertain to Mechanical, Electrical, Plumbing, and Fire Protection (MEPF) systems. Henderson Engineers (HEI) has conducted a comprehensive evaluation of the MEPF-related findings and recommendations, supplemented by site observations at Lincoln Financial Field, correspondence with Philadelphia Eagles Facilities staff, and a review of available existing documentation, technical reports, and utility information. HEI's detailed assessment of the FCA recommendations is included as part of the MEPF Narrative.

To address the remaining FCA recommendations, HKS has developed the accompanying spreadsheet, which consolidates related projects into coordinated scopes of work organized under the following disciplines: Architecture/Interiors, Roof, Façade, Technology, and Food Service. Each recommended project has been evaluated in the context of the proposed stadium renovation and assigned to one of three categories: (1) projects incorporated into the renovation design, either through improvements to existing facilities or new interior and exterior construction; (2) projects rendered unnecessary or no longer applicable as a result of the proposed renovation; and (3) projects considered routine facility maintenance or ongoing capital improvements that fall outside the scope of the HKS renovation design and are anticipated to be addressed through the facility's ongoing maintenance and capital expenditure program.

Refer to attached 261022_HKS_LFF - FCA Review Spreadsheet.



Henderson Engineering Narratives

HENDERSON ENGINEERING ATTACHMENTS

1. Concept Narrative

- 261021_HEI_LFF - Sustainability & MEPF Concept Narrative
- 261021_HEI_LFF - Energy Analysis
- 261021_HEI_LFF - Trend Analysis

2. FCA Document

- 261022_HEI_LFF - FCA Capital Plan - MEPF Work Packages

3. PDF Plan Markups

- 261022_HEI_LFF - Demo Plans (MEPF Markup)
- 261022_HEI_LFF - Proposed Plans (MEPF Markup)



Thornton Tomasetti Narratives

THORNTON TOMASETTI ATTACHMENTS


1. 261022_TTSE_LFF - Renovation Study



Langan Engineering Narratives

SITE


- Pedestrian experience will be improved with reduced conflicts with vehicles with upgraded plaza entry.
- Parking analysis is required on an overall parking in sports complex basis.
- Parking lot access drive location revisions will need to be reviewed with overall gameday management plans as part of final plan
- Modifications to existing solar arrays in parking fields are anticipated.
- NFL security requirements and emergency vehicle access will need to be coordinated for updated plaza.

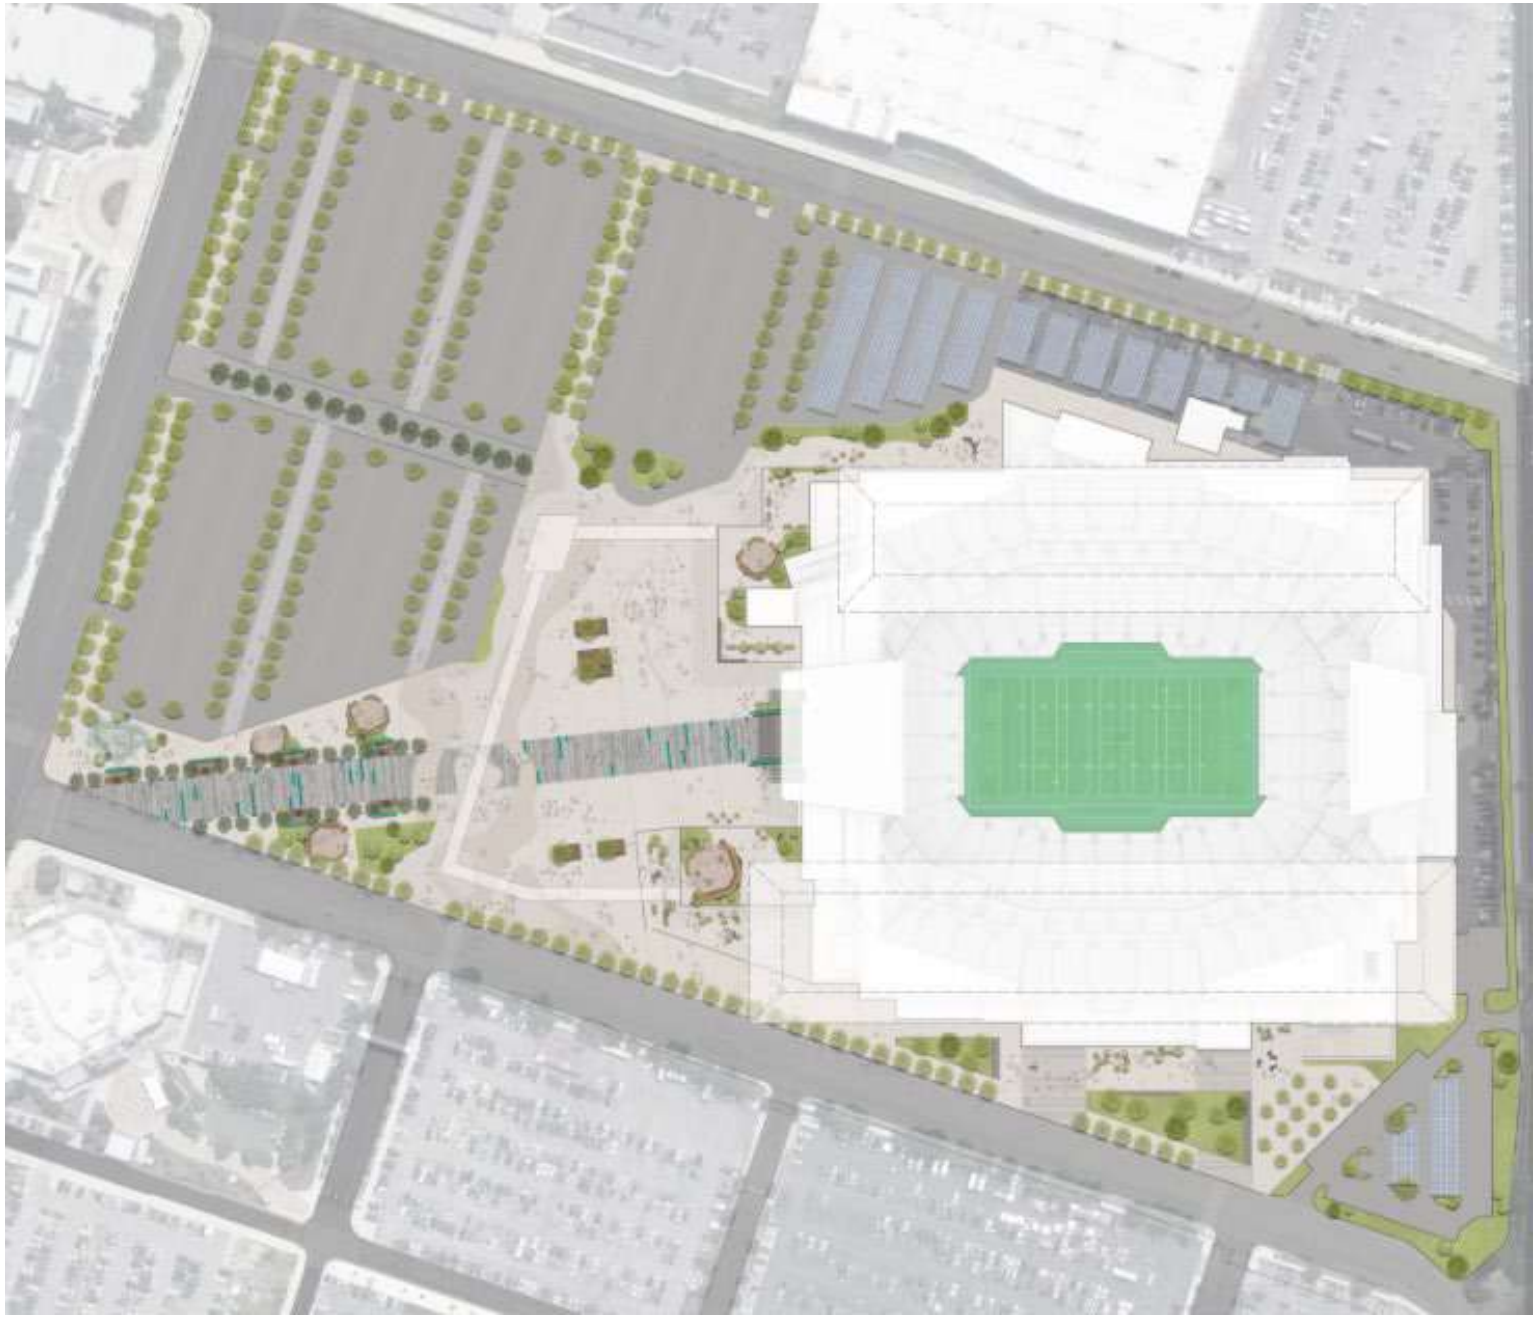

FLOOD HAZARD AREA


The playing field of Lincoln Financial Field is in the 500-year (0.2% annual flood chance) flood Zone X (orange hatch in image below) per FEMA FIRM Map Number 4207570193H.

Note the stadium is not within the 100-year floodplain, but 100-year floodplain is nearby (cyan hatch in image below).

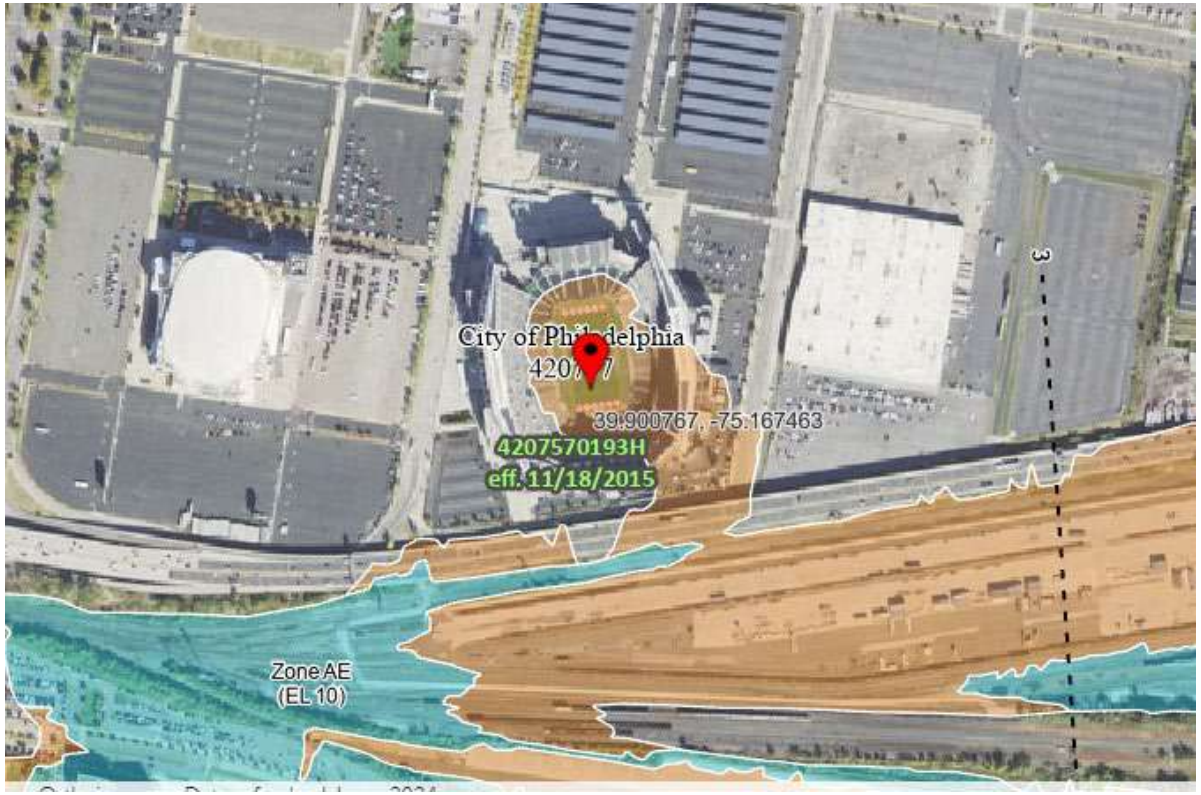

The Flood Insurance Study (FIS) for the City of Philadelphia determined the flood elevation for the 500-year flood is 12.6 NGVD29 (El 6.6 City Datum).

The 100-year flood elevation is 10.1 NGVD29 (El 4.0 City Datum).

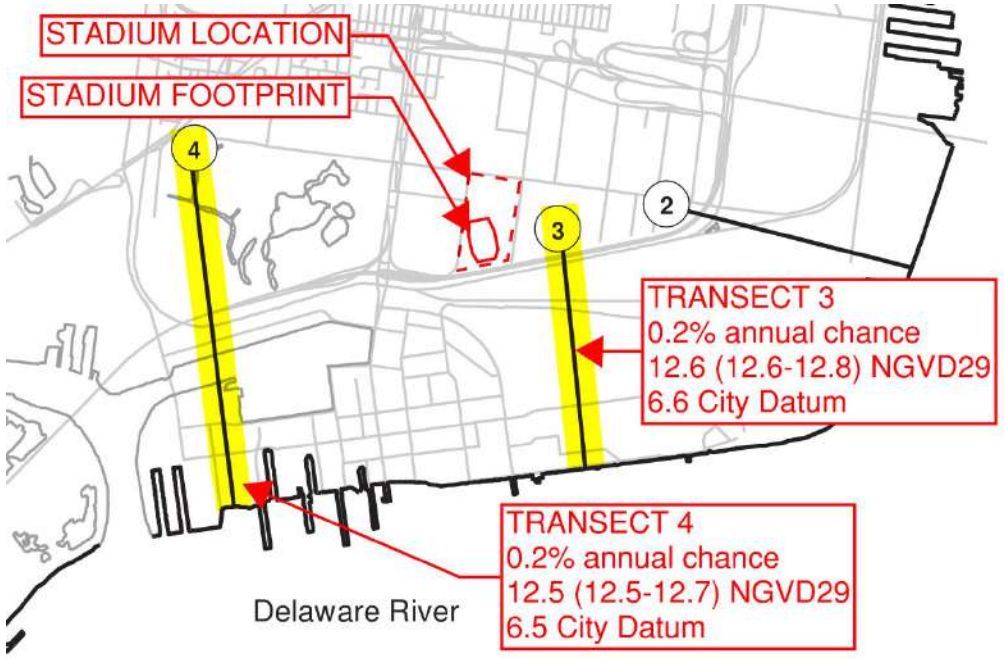

Flood Source	Transect	Starting Wave Conditions for the 1% Annual Chance			Starting Stillwater Elevations (feet NGVD29) Range of Stillwater Elevations (feet NGVD29)			
		Coordinates	Significant Wave Height H_s (ft)	Peak Wave Period T_p (sec)	10% Annual Chance	2% Annual Chance	1% Annual Chance	0.2% Annual Chance
Delaware River	1	N 39.917918 W -75.134332	1.9	2.6	8.7 8.7-8.7	9.7 9.6-9.7	10.3 10.2-10.3	12.8 12.8-12.8
Delaware River	2	N 39.898411 W -75.136147	1.8	2.5	8.7 8.6-8.7	9.6 9.5-9.6	10.2 10.1-10.2	12.6 12.6-12.7
Delaware River	3	N 39.887755 W -75.160745	2.2	2.9	8.5 8.5-8.7	9.5 9.5-9.6	10.1 10.1-10.2	12.6 12.6-12.8
Delaware River	4	N 39.886298 W -75.186719	2.6	3.1	8.5 8.5-8.6	9.4 9.4-9.5	10.0 10.0-10.1	12.5 12.5-12.7


GROUNDWATER ELEVATION – BORING LOCATION PLAN

The geotechnical report by URS dated April 11, 2001, identified two groundwater conditions on the site:

1. A perched condition surrounding the stadium site based on groundwater levels observed by four groundwater observation pipes (GOPs) installed near Borings B-2, B-3, B-4, and B-5 located in 11th and Darien Streets.

2. An independent ground water level observed in one groundwater observation pipe (GOP) near Boring B-15 in the middle of the Linc's playing field.


Surface and highest measured groundwater elevation taken from URS boring logs.

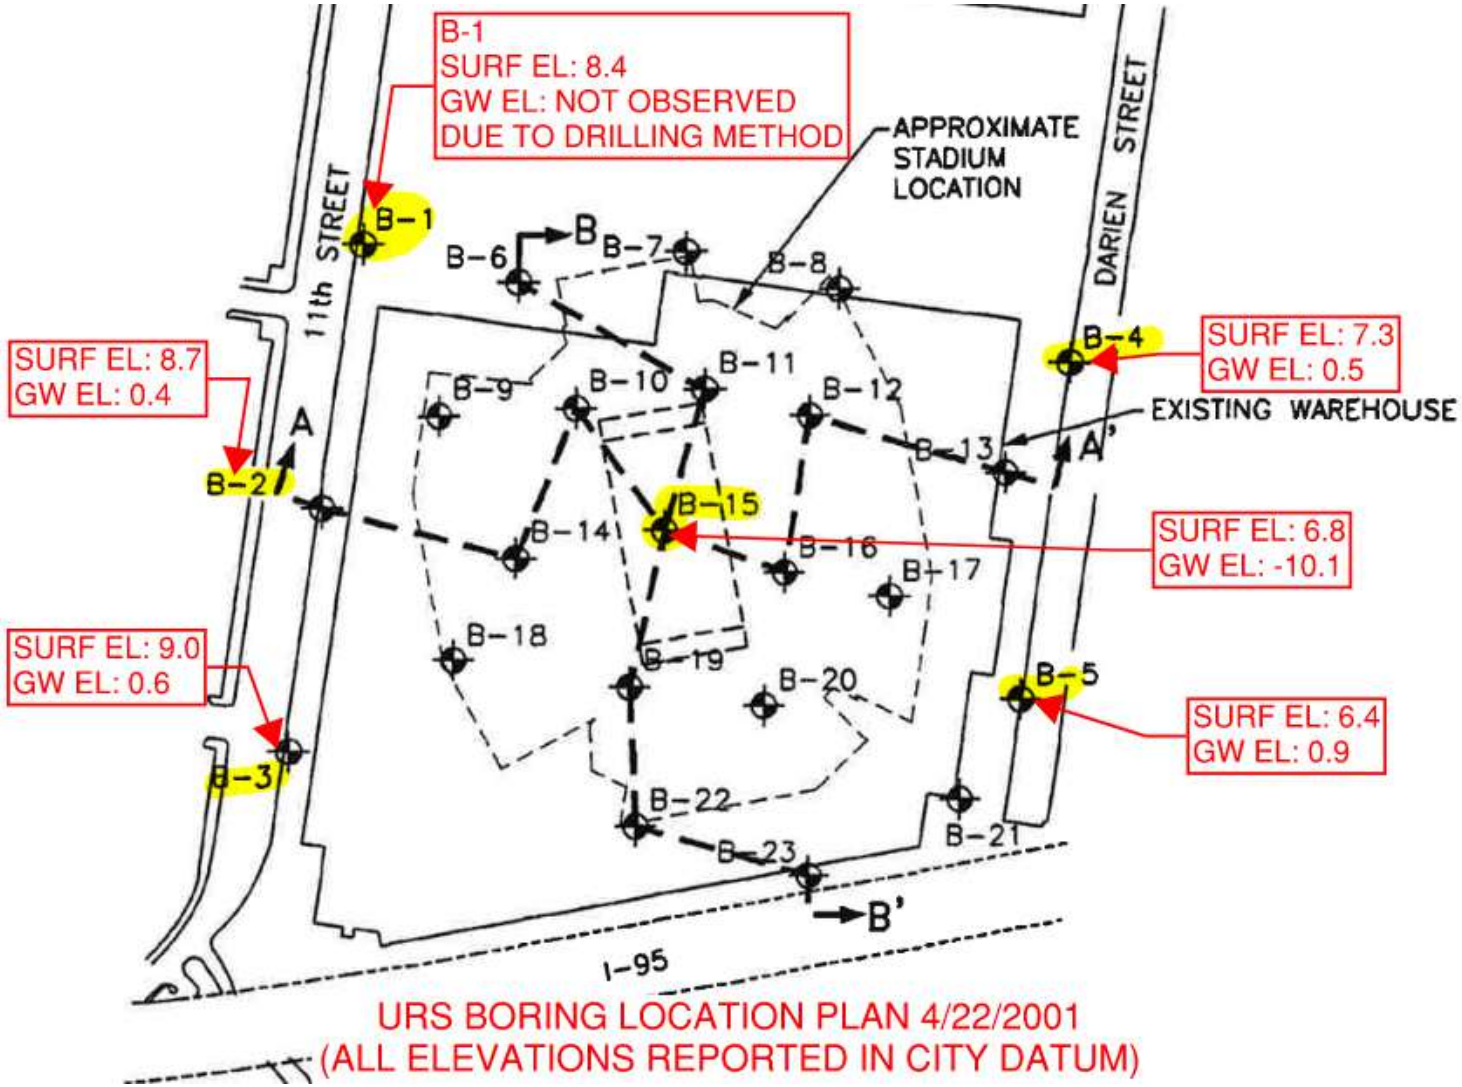

GROUNDWATER ELEVATION – SUBSURFACE PROFILE A-A’

Below is an Inferred Subsurface Profile A-A’ from URS’ report to show the current elevation of the playing field relative to groundwater.

- Per the URS Geotech report the playing field elevation is +5.5 (City Datum).
- Per the USR Geotech report, perched groundwater at both 11th Street and Darien Street is identified in the 0.0 to 0.9 (City Datum)
- Per Boring Log B-15 the groundwater elevation below the playing field is -10.0 (City Datum).

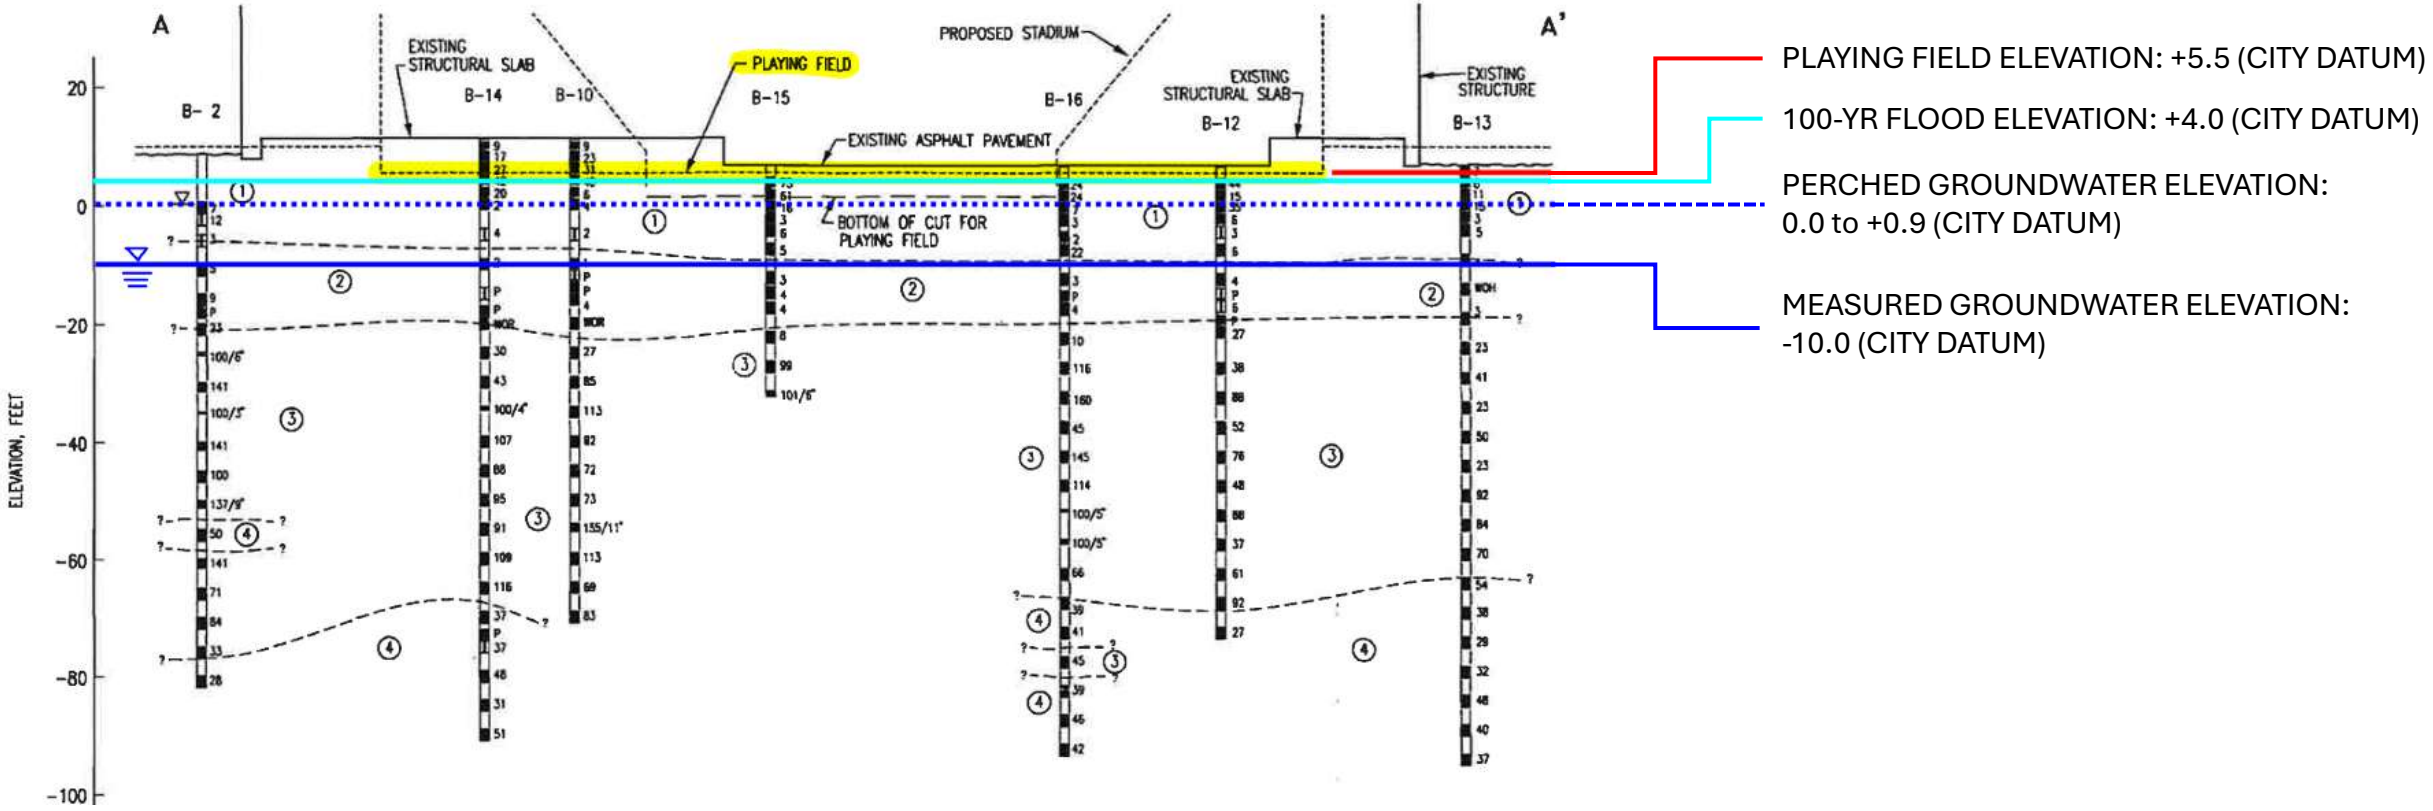


RECOMMENDATION


The 100-yr flood elevation is 4.0 (City Datum). The current field/lowest level is 5.5 (City Datum) which is 1.5 feet above the 100-year flood elevation. It’s worth noting the city historically required finished floors to be 1.5 feet above the 100-year flood elevation. ASCE publishes design guidance for flood resistant design and construction for flood prone areas. The latest edition ASCE24-24 recommends 2 foot above 100-year flood for this type of facility (Class 3 which includes large assembly spaces like large sport facilities among other things). The building is not in the 100-year floodplain, so it might not technically be subject to the ASCE24-24 as a requirement, but following ASCE24-24 as a best practice is recommended.

EXISTING STORMWATER MANAGEMENT

Existing Stormwater Management Infrastructure to be Displaced will need to be replaced.

- Two bioretention areas providing 2,080 cubic feet of storage located near Pattison Avenue and the West Gate displaced by proposed landscape improvements.
- Two porous paved areas located at the end of Lincoln Financial Field Way and the West Gate displaced by proposed landscape improvements.

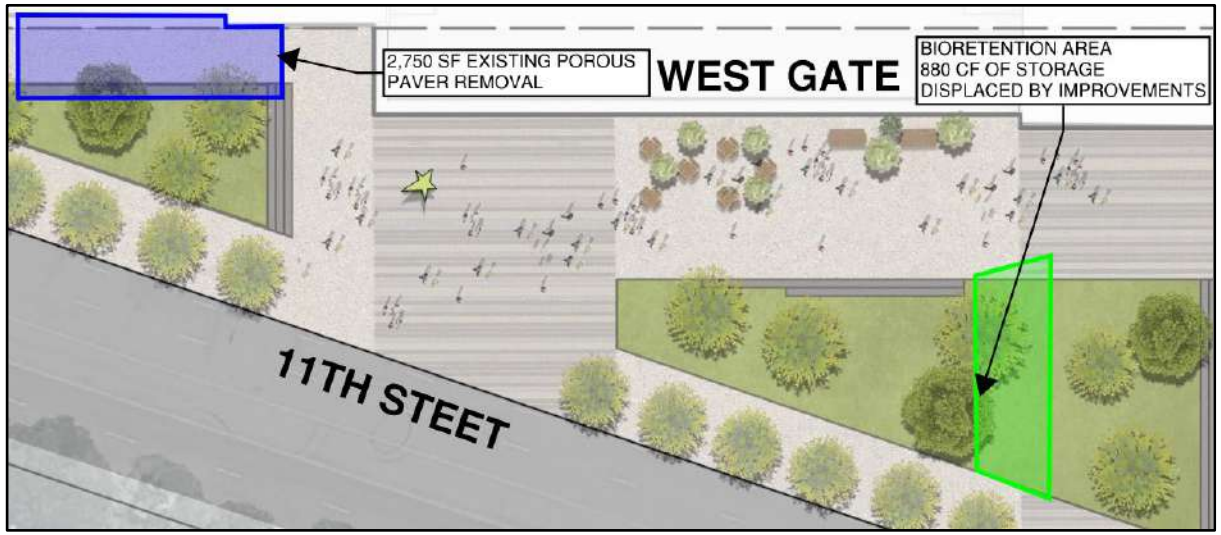

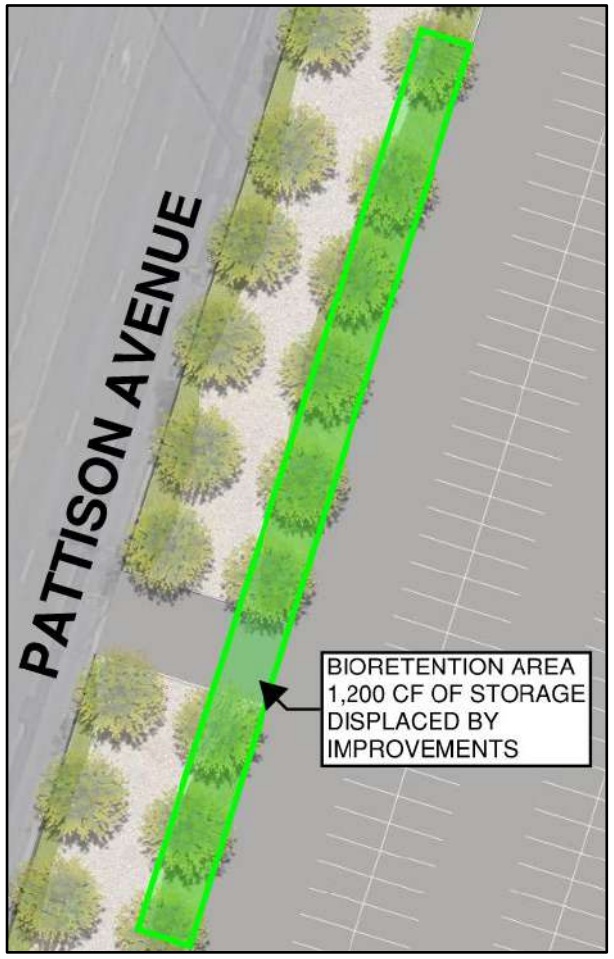



PROPOSED STORMWATER MANAGEMENT & DRAINAGE

Potential Stormwater Management Strategies

- Install permeable pavers and landscaping in plaza area to reduce existing impervious area by at least additional 20%
  - Exempt from PWD's Channel protection and Flood Control requirements if 20% reduction achieved.
  - Locate permeable pavers to avoid other areas from draining on to them.
- Additional shallow, vegetated stormwater management practices located strategically in plaza and parking lots
- Underground cisterns for capture and reuse
- Subsurface infiltration systems below plaza


Estimated PWD PCSM Requirements

WATER QUALITY	CHANNEL PROTECTION	FLOOD CONTROL
APPLIES	EXEMPT	EXEMPT

Watershed:	**Delaware South**
Sewer Type:	**Combined**
Flood Management District:	**A**
Development Type:	**Redevelopment**

Stormwater Considerations

- Confirm 12-month demand of water for re-use approval
  - Toilet flushing, irrigation, HVAC cooling
- Stormwater management infiltration testing required
- Depth to limiting zones and groundwater in stormwater areas.

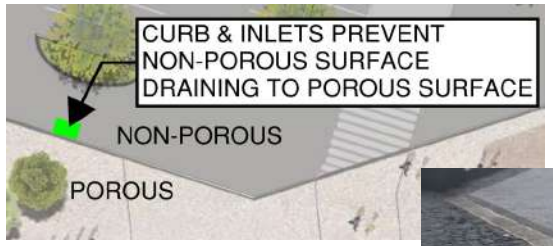





Bioretention



Subsurface Infiltration

Drainage

- Existing drainage patterns will be modified in area of plaza modifications.
- Combination of drainage removal and relocation is expected.
- Extent of modifications will depend on stormwater management approach.
- General grading strategy will be matched to existing conditions to avoid excessive cuts and fills.

UTILITIES


- Other than drainage, utility services in areas of plaza modification should be relatively limited.

- Electrical relocations associated with solar panel modifications and site lighting are expected.

- Utility services are primarily fed from Darien Street and 11th Street.

    - Sanitary system connections associated with lower field to be reviewed and coordinated with MEP to confirm extent of pumping and pipe connection revisions. Based on initial report from Henderson, it seems that the size of the existing sanitary sewer plumbing system is anticipated to be adequate so extent of revisions may be limited to relocations or additional services based on plumbing needs.

    - Based on initial report from Henderson Engineer, it seems that the size of the existing domestic water system is anticipated to be adequate so extent of revisions may be limited to relocations or additional services based on plumbing needs.

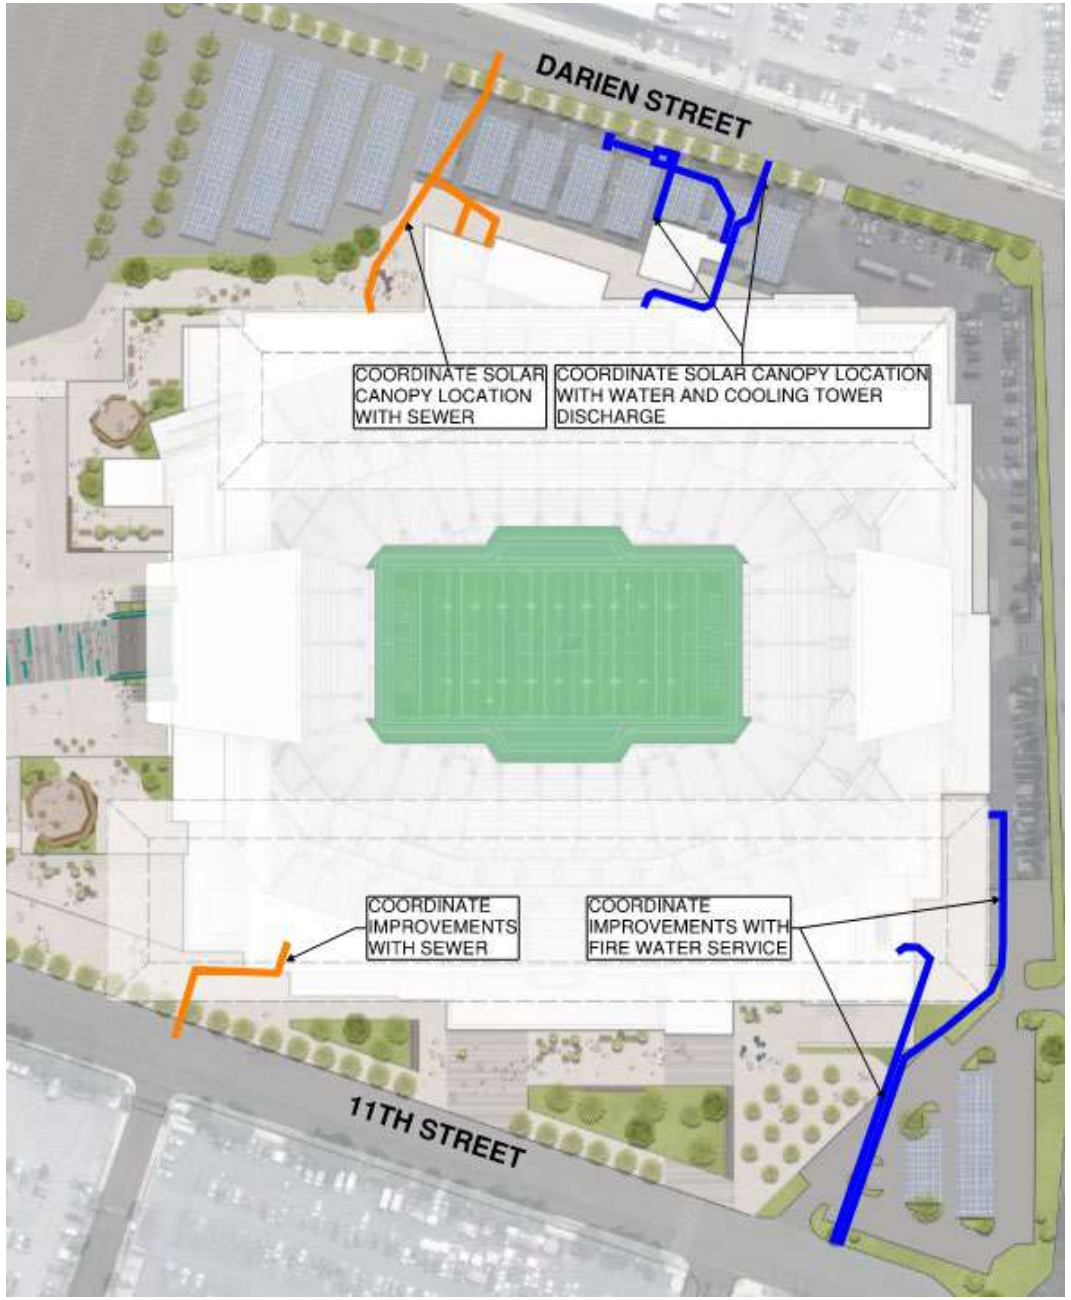

*Not all utilities shown. Major water and sewer services illustrated from preliminary planning purposes.


HKS DRAWINGS

HKS DRAWINGS

HKS has prepared demolition and new construction drawing to scale on 36x48 sheets:

1. 261022_HKS_LFF - Demo Plans
2. 261022_HKS_LFF - Proposed Plans

THE LINC
NEXT ERA

Concept Pricing Package
October 22, 2026